



**ULTRAVOLT® HIGH-POWER  
40C TO 60C SERIES**

40 TO 60 KV HIGH VOLTAGE CAP-CHARGING SUPPLIES





# Single-output

DC to high  
voltage DC  
modules for  
capacitor charging  
and DC power


The high-power 40C to 60C line of high voltage regulated DC-to-DC converters is an extension of the C series, directly addressing the high-power-density needs of > 30 W applications from 40 to 60 kV. This high power density is especially suited to high-energy systems with large capacitances, fast repetition rates, or high continuous-DC-power requirements.

## Features

- › 3 models from 0 to 40 kV through 0 to 60 kV
- › 60, 125, or 250 W output power
- › Maximum lout capability down to 0 V
- › Maximum lout during charge/rise time
- › Output short-circuit protection
- › Very fast rise with very low over-shoot
- › High efficiency
- › High power density
- › Output current and voltage monitors
- › > 200,000 hour MTBF at 65°C
- › Fixed-frequency, low-stored-energy design
- › Optional digital-ready higher-performance interface (-I5/-I10)

## Typical Applications

- › Pulsed laser
- › Ion pump
- › Plasma generator
- › Electrostatic precipitator
- › Deposition
- › HV amplifier bias
- › HV cap charger
- › HV pulse generator
- › HV test equipment
  - Insulation testing (hi-pot)
  - Time-domain-resolver (TDR)
  - Motor winding tester or cable thumper

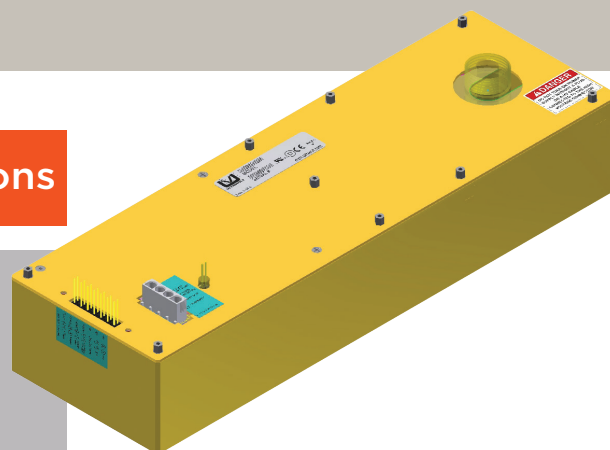



| PARAMETER                           | CONDITIONS                               | All Types   |         |        |             |        |        |             |        |        | UNITS  |
|-------------------------------------|--|---|---------|--------|-------------|--------|--------|-------------|--------|--------|--------|
| <b>Input</b>                        |  | <b>All Types</b>  |         |        |             |        |        |             |        |        |        |
| <b>Voltage Range</b>                | Full Power                               | +23 to 30   |         |        |             |        |        |             |        |        | VDC    |
| <b>Voltage Range</b>                | Derated Power Range                      | 15 to 23; 30 to 32  |         |        |             |        |        |             |        |        | VDC    |
| <b>Current</b>                      | Standby/Disable                          | < 150   |         |        |             |        |        |             |        |        | mA     |
| <b>Current</b>                      | No Load, Max Eout                        | < 1250  |         |        |             |        |        |             |        |        | mA     |
| <b>Current</b>                      | Max Load, Max Eout                       | < 13  |         |        |             |        |        |             |        |        | A      |
| <b>Output</b>                       |  | <b>40 C</b>   |         |        | <b>50 C</b> |        |        | <b>60 C</b> |        |        |        |
| <b>Voltage Range</b>                | Nominal Input                            | 0 to 40,000   |         |        | 0 to 50,000 |        |        | 0 to 60,000 |        |        | VDC    |
| <b>Power</b>                        | Nominal Input, Max Eout                  | 60  | 125     | 250    | 60          | 125    | 250    | 60          | 125    | 250    | Watts  |
| <b>Current</b>                      | Iout, Entire Output Voltage Range        | 1.50  | 3.13    | 6.25   | 1.20        | 2.50   | 5.00   | 1.00        | 2.08   | 4.17   | mA     |
| <b>Current Scale Factor</b>         | Full Load                                | 0.30  | 0.63    | 1.25   | 0.24        | 0.50   | 1.00   | 0.20        | 0.42   | 0.83   | mA/V   |
| <b>Voltage Monitor Scaling</b>      |  | 10,000:1 ±2%  |         |        |             |        |        |             |        |        | -      |
| <b>Internal Capacitance</b>         | Capacitance/95% Decay (50 Meg Load)      | 750/104   | 750/104 | 375/52 | 600/84      | 600/84 | 300/42 | 500/70      | 500/70 | 250/35 | pF/mS  |
| <b>Ripple</b>                       | Full Load, Max Eout                      | < 1%  |         |        |             |        |        |             |        |        | V p-p  |
| <b>Rise Time</b>                    | Max Iout, Various C Loads and Eout       | Figure A  |         |        |             |        |        |             |        |        | -      |
| <b>Storage Capacitance</b>          | Internal                                 | 750   | 750     | 375    | 600         | 600    | 300    | 500         | 500    | 250    | pF     |
| <b>Over-shoot</b>                   | C Load, 0 Eout to Full Eout              | < 1%  |         |        |             |        |        |             |        |        | V pk   |
| <b>Line Regulation</b>              | Nom. Input, Max Eout, Full Power         | < 0.01%   |         |        |             |        |        |             |        |        | VDC    |
| <b>Static Load Regulation</b>       | No Load to Full Load, Max Eout           | < 0.01%   |         |        |             |        |        |             |        |        | VDC    |
| <b>Stability</b>                    | 30 Min Warmup, Per 8 H Per Day           | < 0.01%/< 0.02%   |         |        |             |        |        |             |        |        | VDC    |
| <b>Programming and Controls</b>     |  | <b>All Types</b>  |         |        |             |        |        |             |        |        |        |
| <b>Input Impedance</b>              | Nominal Input                            | +Output models 1.1 MΩ to GND, -output models 1.1 MΩ to +5 Vref  |         |        |             |        |        |             |        |        | MΩ     |
| <b>Adjust Resistance</b>            | Typical Potentiometer Values             | 10 to 100 K (Pot. across Vref. and signal GND, wiper to adjust) |         |        |             |        |        |             |        |        | Ω      |
| <b>Adjust Logic</b>                 | 0 to +5 for +Out, +5 to 0 for -Out       | +4.64 VDC for +output or +0.36 for -output = nominal Eout       |         |        |             |        |        |             |        |        | -      |
| <b>Output Voltage and Impedance</b> | T=+25°C                                  | +5.00 VDC ±1%, Zout = 464 Ω ±1%                                 |         |        |             |        |        |             |        |        | -      |
| <b>Enable/Disable</b>               |  | 0 to +0.8 V disable, +2.0 to 30 enable (default = enable)       |         |        |             |        |        |             |        |        | VDC    |
| <b>Environmental</b>                |  | <b>All Types</b>  |         |        |             |        |        |             |        |        |        |
| <b>Operating</b>                    | Full Load, Max Eout, Case Temperature    | -40 to +65  |         |        |             |        |        |             |        |        | °C     |
| <b>Coefficient</b>                  | Over the Specified Temperature           | ±50 (±25 optional)  |         |        |             |        |        |             |        |        | PPM/°C |
| <b>Thermal Shock</b>                | Mil-Std-810, Method 503-4, Proc. II      | -40 to +65  |         |        |             |        |        |             |        |        | °C     |
| <b>Storage</b>                      | Non-Operating, Case Temp.                | -55 to +105   |         |        |             |        |        |             |        |        | °C     |
| <b>Humidity</b>                     | All Conditions, Standard Package         | 0 to 95% non-condensing   |         |        |             |        |        |             |        |        | -      |
| <b>Altitude</b>                     | Standard Package, All Conditions         | Sea level through 70,000  |         |        |             |        |        |             |        |        | ft     |
| <b>Shock</b>                        | Mil-Std-810, Method 516.5, Proc. IV      | 20  |         |        |             |        |        |             |        |        | Gs     |
| <b>Vibration</b>                    | Mil-Std-810, Method 514.5, Fig. 514.5C-3 | 10  |         |        |             |        |        |             |        |        | Gs     |


Figure A. Rise time formulas

$$\begin{array}{llll}
 C = \mu\text{F} & & C = \mu\text{F} & & C = \mu\text{F} \\
 V = \text{Volts} & & V = \text{kV} & & V = \text{kV} \\
 I = \text{mA} & T = \frac{C \times V}{I} & I = \text{mA} & I = C \times V \times F & I = \text{mA} \\
 T = \text{mS} & & F = \text{Hz} & & F = \text{Hz} \\
 & & & & F = \frac{I}{C \times V} \\
 & & & & C = \mu\text{F} \\
 & & & & E^2 = \text{kV} \\
 & & & & J = \text{Ws} \\
 & & & & J = \frac{C \times E^2}{2}
 \end{array}$$


**Note:** Capacitance must include HVPS internal capacitance.



## 40C AND 50C

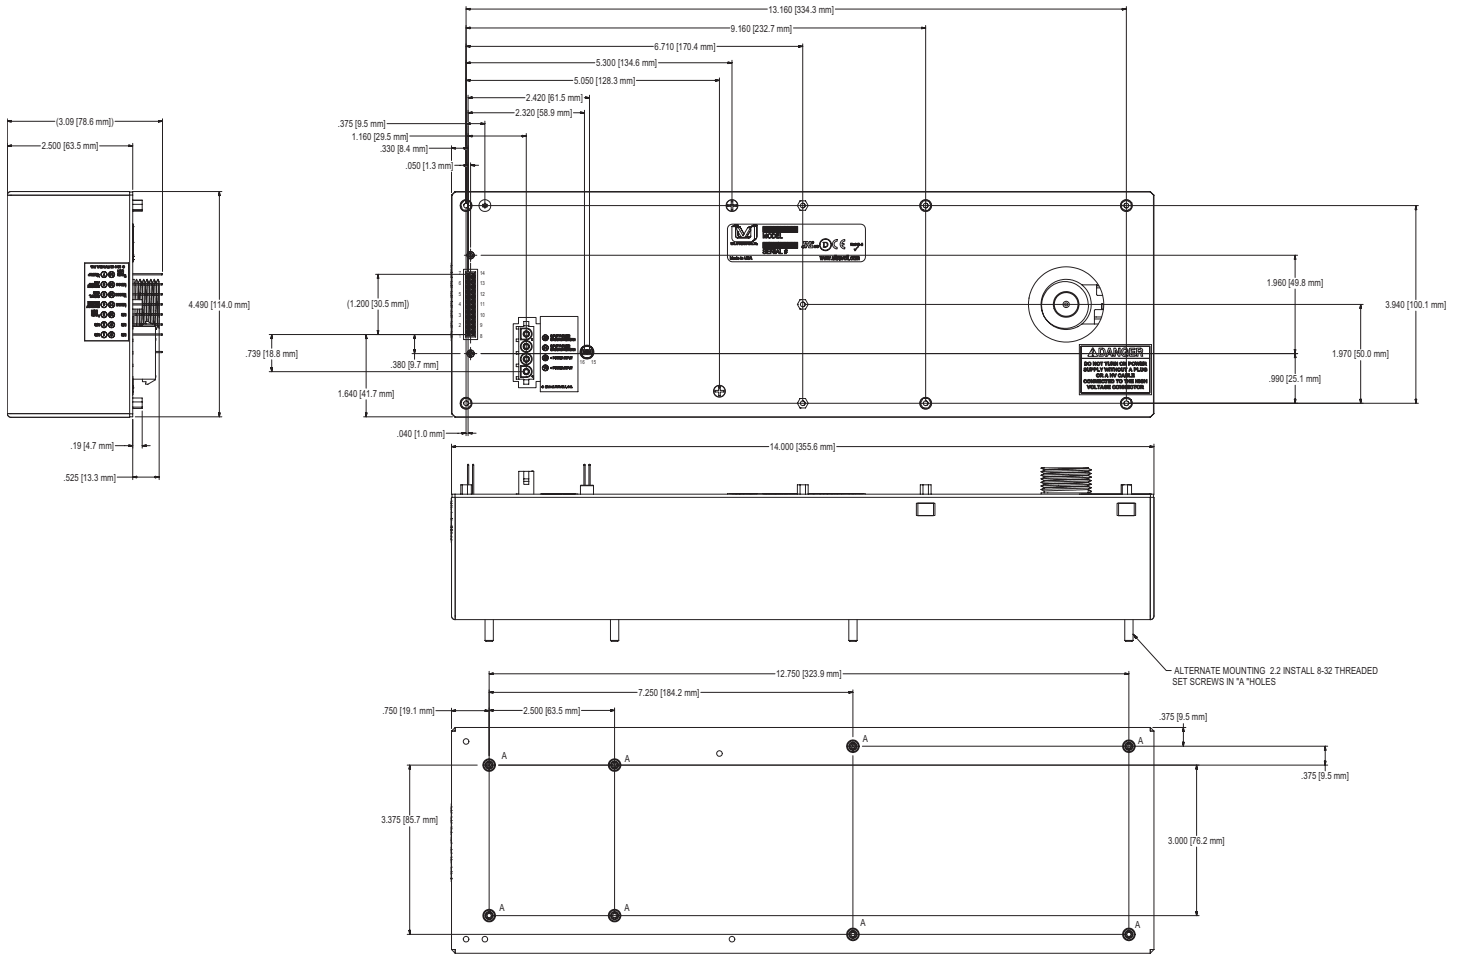

## 40C AND 50C WITH -WS AND 60C

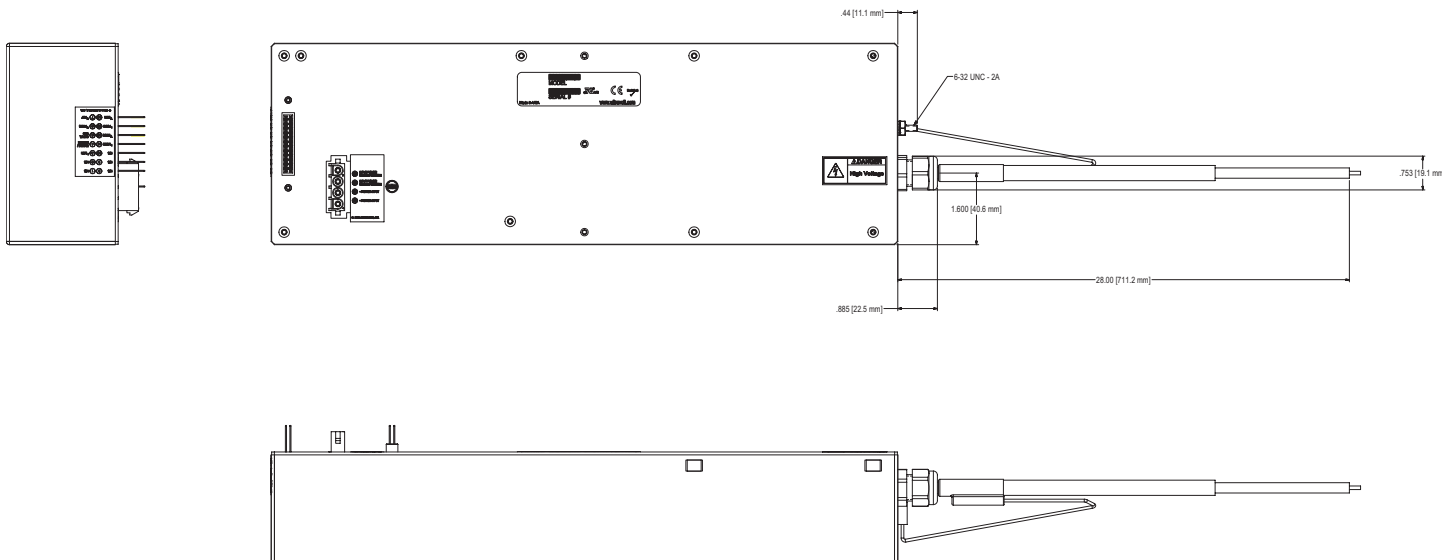

### PHYSICAL SPECIFICATIONS

|                              |  |
|------------------------------|--|
| <b>Pins</b>                  | Gold-plated 0.64 mm <sup>2</sup> (0.025 in <sup>2</sup> )  |
|                              | Center of pins and mounting holes located from center of pin 1   |
|                              | Pins 1 through 14 spacing: 2.54 mm x 5.08 mm (0.100" x 0.200") on center, height from cover 7.11 mm (0.280") min |
|                              | Pins 15 and 16 spacing: 2.54 mm (0.100") on center, height from cover 11.43 mm (0.450") min                      |
| <b>HV Output Connection</b>  | 40C-50C LGH flying lead cable assembly required, P/N CA-50KV-1000  |
|                              | 60C standard 0.7 m (28") coaxial flying lead   |
| <b>Construction</b>          | RTV-filled aluminum box  |
|                              | Chem film per MIL-A-8625 Type II (anodizing)   |
| <b>Approx. Volume</b>        | 0.0026 m <sup>3</sup> (160 in <sup>3</sup> )   |
| <b>Approx. Weight</b>        | 4.5 kg (10 lb)   |
| <b>Overall</b>               | ±1.02 mm (0.040") pin to pin 0.38 mm (0.015")  |
| <b>Hole-to-Hole Location</b> | 0.76 mm (0.03")  |

## CONNECTIONS

| Pin                   | Function                   |
|-----------------------|----------------------------|
| <b>21 and 22</b>      | Input-power ground return  |
| <b>19 and 20</b>      | Positive power input       |
| <b>3</b>              | Iout monitor               |
| <b>4</b>              | Enable/disable             |
| <b>5</b>              | Signal ground return       |
| <b>6</b>              | Remote adjust input        |
| <b>7</b>              | +5 VDC reference output    |
| <b>10</b>             | N/C (or arc detect option) |
| <b>11, 12, and 13</b> | N/C                        |
| <b>14</b>             | Eout monitor               |
| <b>15 and 16</b>      | HV ground return           |

• All grounds joined internally. Power-supply mounting points isolated from internal grounds by > 100 kΩ, 0.01 μF/500 V (max).

## ORDERING INFORMATION

|                           |   |      |
|---------------------------|---|------|
| <b>Type</b>               | 40,000 VDC Output                           | 40C  |
|                           | 50,000 VDC Output                           | 50C  |
|                           | 60,000 VDC Output                           | 60C  |
| <b>Input</b>              | 24 VDC Nominal                              | 24   |
| <b>Polarity</b>           | Positive Output                             | -P   |
|                           | Negative Output                             | -N   |
| <b>Power</b>              | 60 W Output                                 | 60   |
|                           | 125 W Output                                | 125  |
|                           | 250 W Output                                | 250  |
| <b>Heat Sink</b>          | 1.02 cm (0.400") High (Sized to Fit Case)   | -H   |
| <b>PCB Support</b>        | (5) 0.47 cm (0.187") Standoffs on Top Cover | -Z11 |
| <b>Enhanced Interface</b> | 5 V Controls and Monitors                   | -I5  |
|                           | 10 V Control and Monitors                   | -I10 |
| <b>Options</b>            | Arc Detect*                                 | -AD  |
|                           | Arc Quench*                                 | -AQ  |

\* Available only with I5 or I10 options

Note: For more information on the enhanced interface options, download the I5/I10 option datasheet.

Example: **40C24-P125-I5**



Non-RoHS compliant units are available. Please contact the factory for more information.  
Manufactured in U.S.A.



For international contact information, visit [advanced-energy.com](http://advanced-energy.com).



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.