

- Compact SIP-8 package
- I/O-isolation voltage 1'600 VDC
- Fully regulated outputs
- Operating temp range  $-40^{\circ}\text{C}$  to  $+95^{\circ}\text{C}$
- Continuous short circuit protection
- Remote On/Off
- 3-year product warranty
- Designed to meet UL 62368-1



TEC 2 is a new series with the design purpose to improve the prevalent 2 Watt SIP-8 DC/DC converters in terms of cost, efficiency and performance. The latest technology and components enable an increase in efficiency by more than 20%. With the reduction of thermal loss, the operating temperature range can be expanded from  $-40^{\circ}\text{C}$  to  $+95^{\circ}\text{C}$ . The converters are fully regulated over 0 - 100% load (no minimum load is required). The low input range is extended from 4.5 to 13.2 VDC while models are also available with the standard 2:1 input ranges (see TEC 2WI series for 4:1 input ranges). The functional isolation system is designed to meet EN 62368-1 with 1600 VDC test voltage.

| Models     |                                |          |                  |          |                  |                 |
|------------|--------------------------------|----------|------------------|----------|------------------|-----------------|
| Order Code | Input Voltage Range            | Output 1 |                  | Output 2 |                  | Efficiency typ. |
|            |                                | Vnom     | I <sub>max</sub> | Vnom     | I <sub>max</sub> |                 |
| TEC 2-0910 | 4.5 - 13.2 VDC<br>(9 VDC nom.) | 3.3 VDC  | 500 mA           |          |                  | 78 %            |
| TEC 2-0911 |                                | 5 VDC    | 400 mA           |          |                  | 81 %            |
| TEC 2-0919 |                                | 9 VDC    | 222 mA           |          |                  | 84 %            |
| TEC 2-0912 |                                | 12 VDC   | 167 mA           |          |                  | 84 %            |
| TEC 2-0913 |                                | 15 VDC   | 134 mA           |          |                  | 84 %            |
| TEC 2-0915 |                                | 24 VDC   | 83 mA            |          |                  | 85 %            |
| TEC 2-0921 |                                | +5 VDC   | 200 mA           | -5 VDC   | 200 mA           | 81 %            |
| TEC 2-0922 |                                | +12 VDC  | 83 mA            | -12 VDC  | 83 mA            | 85 %            |
| TEC 2-0923 |                                | +15 VDC  | 67 mA            | -15 VDC  | 67 mA            | 84 %            |
| TEC 2-1210 | 9 - 18 VDC<br>(12 VDC nom.)    | 3.3 VDC  | 500 mA           |          |                  | 78 %            |
| TEC 2-1211 |                                | 5 VDC    | 400 mA           |          |                  | 82 %            |
| TEC 2-1219 |                                | 9 VDC    | 222 mA           |          |                  | 84 %            |
| TEC 2-1212 |                                | 12 VDC   | 167 mA           |          |                  | 85 %            |
| TEC 2-1213 |                                | 15 VDC   | 134 mA           |          |                  | 85 %            |
| TEC 2-1215 |                                | 24 VDC   | 83 mA            |          |                  | 85 %            |
| TEC 2-1221 |                                | +5 VDC   | 200 mA           | -5 VDC   | 200 mA           | 82 %            |
| TEC 2-1222 |                                | +12 VDC  | 83 mA            | -12 VDC  | 83 mA            | 85 %            |
| TEC 2-1223 |                                | +15 VDC  | 67 mA            | -15 VDC  | 67 mA            | 84 %            |
| TEC 2-2410 | 18 - 36 VDC<br>(24 VDC nom.)   | 3.3 VDC  | 500 mA           |          |                  | 78 %            |
| TEC 2-2411 |                                | 5 VDC    | 400 mA           |          |                  | 83 %            |
| TEC 2-2419 |                                | 9 VDC    | 222 mA           |          |                  | 85 %            |
| TEC 2-2412 |                                | 12 VDC   | 167 mA           |          |                  | 86 %            |
| TEC 2-2413 |                                | 15 VDC   | 134 mA           |          |                  | 85 %            |
| TEC 2-2415 |                                | 24 VDC   | 83 mA            |          |                  | 85 %            |
| TEC 2-2421 |                                | +5 VDC   | 200 mA           | -5 VDC   | 200 mA           | 83 %            |
| TEC 2-2422 |                                | +12 VDC  | 83 mA            | -12 VDC  | 83 mA            | 85 %            |
| TEC 2-2423 |                                | +15 VDC  | 67 mA            | -15 VDC  | 67 mA            | 86 %            |
| TEC 2-4810 | 36 - 75 VDC<br>(48 VDC nom.)   | 3.3 VDC  | 500 mA           |          |                  | 76 %            |
| TEC 2-4811 |                                | 5 VDC    | 400 mA           |          |                  | 80 %            |
| TEC 2-4819 |                                | 9 VDC    | 222 mA           |          |                  | 82 %            |
| TEC 2-4812 |                                | 12 VDC   | 167 mA           |          |                  | 84 %            |
| TEC 2-4813 |                                | 15 VDC   | 134 mA           |          |                  | 85 %            |
| TEC 2-4815 |                                | 24 VDC   | 83 mA            |          |                  | 85 %            |
| TEC 2-4821 |                                | +5 VDC   | 200 mA           | -5 VDC   | 200 mA           | 80 %            |
| TEC 2-4822 |                                | +12 VDC  | 83 mA            | -12 VDC  | 83 mA            | 85 %            |
| TEC 2-4823 |                                | +15 VDC  | 67 mA            | -15 VDC  | 67 mA            | 83 %            |

## Input Specifications

|                        |              |  |
|------------------------|--------------|--|
| Input Current          | - At no load | 9 Vin models: <b>45 mA typ.</b><br>12 Vin models: <b>25 mA typ.</b><br>24 Vin models: <b>10 mA typ.</b><br>48 Vin models: <b>8 mA typ.</b>   |
| Surge Voltage          |              | 9 Vin models: <b>15 VDC max.</b> (1 s max.)<br>12 Vin models: <b>25 VDC max.</b> (1 s max.)<br>24 Vin models: <b>50 VDC max.</b> (1 s max.)<br>48 Vin models: <b>100 VDC max.</b> (1 s max.)   |
| Under Voltage Lockout  |              | 9 Vin models: <b>2 VDC min. / 3 VDC typ. / 4 VDC max.</b><br>12 Vin models: <b>6 VDC min. / 7 VDC typ. / 8 VDC max.</b><br>24 Vin models: <b>13 VDC min. / 15 VDC typ. / 17 VDC max.</b><br>48 Vin models: <b>29 VDC min. / 32 VDC typ. / 35 VDC max.</b>    |
| Recommended Input Fuse |              | 9 Vin models: <b>1'000 mA</b> (slow blow)<br>12 Vin models: <b>500 mA</b> (slow blow)<br>24 Vin models: <b>315 mA</b> (slow blow)<br>48 Vin models: <b>160 mA</b> (slow blow)<br>(The need of an external fuse has to be assessed in the final application.) |
| Input Filter           |              | <b>Internal Capacitor</b>  |

## Output Specifications

|                           |   |   |
|---------------------------|---|---|
| Voltage Set Accuracy      |   | <b>±1% max.</b>   |
| Regulation                | - Input Variation (Vmin - Vmax)               | single output models: <b>0.2% max.</b><br>dual output models: <b>0.2% max.</b>  |
|                           | - Load Variation (0 - 100%)                   | single output models: <b>1% max.</b><br>dual output models: <b>1% max.</b> (Output 1)<br><b>1% max.</b> (Output 2)  |
|                           | - Cross Regulation<br>(25% / 100% asym. load) | dual output models: <b>5% max.</b>  |
| Ripple and Noise          | - 20 MHz Bandwidth                            | <b>75 mVp-p typ.</b>  |
| Capacitive Load           | - single output                               | 3.3 Vout models: <b>3'300 µF max.</b><br>5 Vout models: <b>1'680 µF max.</b><br>9 Vout models: <b>1'000 µF max.</b><br>12 Vout models: <b>820 µF max.</b><br>15 Vout models: <b>680 µF max.</b><br>24 Vout models: <b>220 µF max.</b> |
|                           | - dual output                                 | 5 / -5 Vout models: <b>1'000 / 1'000 µF max.</b><br>12 / -12 Vout models: <b>470 / 470 µF max.</b><br>15 / -15 Vout models: <b>330 / 330 µF max.</b>  |
| Minimum Load              |   | <b>Not required</b>   |
| Temperature Coefficient   |   | <b>±0.02 %/K max.</b>   |
| Start-up Time             |   | <b>10 ms typ. / 20 ms max.</b>  |
| Short Circuit Protection  |   | <b>Continuous, Automatic recovery</b>   |
| Output Current Limitation |   | <b>140 - 240% of Iout max.</b><br><b>180% typ. of Iout max.</b>   |
| Transient Response        | - Response Time                               | <b>500 µs typ.</b> (25% Load Step)  |

## Safety Specifications

|                  |                             |   |
|------------------|-----------------------------|---|
| Safety Standards | - IT / Multimedia Equipment | <b>Designed for EN 62368-1 (no certification)</b> |
|------------------|-----------------------------|---|

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

### EMC Specifications

|               |                             |  |
|---------------|-----------------------------|--|
| EMI Emissions | - Conducted Emissions       | EN 55032 class A (with external filter)<br>EN 55032 class B (with external filter)                               |
|               | - Radiated Emissions        | EN 55032 class A (with external filter)<br>EN 55032 class B (with external filter)                               |
|               |                             | External filter proposal: <a href="http://www.tracopower.com/overview/tec2">www.tracopower.com/overview/tec2</a> |
| EMS Immunity  | - Electrostatic Discharge   | Air: EN 61000-4-2, ±8 kV, perf. criteria A<br>Contact: EN 61000-4-2, ±6 kV, perf. criteria A                     |
|               | - RF Electromagnetic Field  | EN 61000-4-3, 10 V/m, perf. criteria A   |
|               | - EFT (Burst) / Surge       | EN 61000-4-4, ±2 kV, perf. criteria A<br>EN 61000-4-5, ±1 kV, perf. criteria A                                   |
|               | - Conducted RF Disturbances | Ext. input component: KY 220 µF / 100 V<br>EN 61000-4-6, 10 Vrms, perf. criteria A                               |
|               | - PF Magnetic Field         | Continuous: EN 61000-4-8, 100 A/m, perf. criteria A<br>1 s: EN 61000-4-8, 1000 A/m, perf. criteria A             |

### General Specifications



|                          |                                 |  |
|--------------------------|---------------------------------|--|
| Relative Humidity        |                                 | 95% max. (non condensing)  |
| Temperature Ranges       | - Operating Temperature         | -40°C to +95°C   |
|                          | - Case Temperature              | +105°C max.  |
|                          | - Storage Temperature           | -55°C to +125°C  |
| Power Derating           | - High Temperature              | 5.9 %/K above 88°C   |
| Cooling System           |                                 | Natural convection (20 LFM)  |
| Remote Control           | - Current Controlled Remote     | On: open circuit<br>Off: 2 to 4 mA current (internal 1 kΩ resistor)  |
|                          | - Off Idle Input Current        | External circuit proposal: <a href="http://www.tracopower.com/info/current-remote.pdf">www.tracopower.com/info/current-remote.pdf</a><br>2.5 mA typ. |
| Switching Frequency      |                                 | 100 kHz min. (PFM)   |
| Insulation System        |                                 | Functional Insulation  |
| Isolation Test Voltage   | - Input to Output, 60 s         | 1'600 VDC  |
| Isolation Resistance     | - Input to Output, 500 VDC      | 1'000 MΩ min.  |
| Isolation Capacitance    | - Input to Output, 100 kHz, 1 V | 50 pF max.   |
| Reliability              | - Calculated MTBF               | 6'620'000 h (MIL-HDBK-217F, ground benign)   |
| Environment              | - Vibration                     | MIL-STD-810F   |
|                          | - Mechanical Shock              | MIL-STD-810F   |
|                          | - Thermal Shock                 | MIL-STD-810F   |
| Housing Material         |                                 | Non-conductive Plastic (UL94 V-0 rated)  |
| Potting Material         |                                 | Silicone (UL 94 V-0 rated)   |
| Pin Material             |                                 | Copper   |
| Pin Foundation Plating   |                                 | Nickel (1 - 2 µm)  |
| Pin Surface Plating      |                                 | Tin (3 - 5 µm), matte  |
| Soldering Profile        |                                 | Wave Soldering<br>260°C / 10 s max.  |
| Connection Type          |                                 | THD (Through-Hole Device)  |
| Weight                   |                                 | 4.5 g  |
| Environmental Compliance | - Reach                         | <a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a>                                     |
|                          | - RoHS                          | <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a>                                       |

### Supporting Documents

|  |  |
|--|--|
| Overview Link (for additional Documents) | <a href="http://www.tracopower.com/overview/tec2">www.tracopower.com/overview/tec2</a> |
|--|--|

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

**Outline Dimensions**

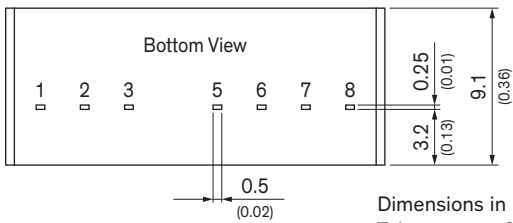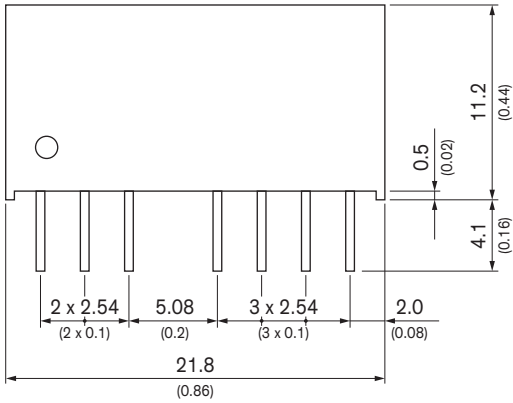

Dimensions in mm (inch)  
 Tolerances:  $\pm 0.5$  ( $\pm 0.02$ )  
 Pin pitch tolerances  $\pm 0.25$  ( $\pm 0.01$ )  
 Pin dimension tolerance  $\pm 0.1$  (0.004)

| Pinout |               |               |
|--------|---------------|---------------|
| Pin    | Single        | Dual          |
| 1      | -Vin (GND)    | -Vin (GND)    |
| 2      | +Vin (Vcc)    | +Vin (Vcc)    |
| 3      | Remote On/Off | Remote On/Off |
| 5      | NC            | NC            |
| 6      | +Vout         | +Vout         |
| 7      | -Vout         | Common        |
| 8      | NC            | -Vout         |

NC: Not connected



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.