

Configuration of Documents

P/N	Documents	No.	Title	CAT.No.
SFW_S-2ST(M)E9LF	Specification	SC-SFWS03		
	Connector dwg.	JSA96516	CAT.NO.TABLE FOR 1mm SPACING SMT CONNECTOR	SFW__S-2ST__LF
		JSA96517	1mm SPACING SURFACE MOUNT FPC/FFC CONNECTOR	SFW__S-2ST__LF
		JSA96518	1mm SPACING SURFACE MOUNT FPC/FFC CONNECTOR	SFW__S-2STM__LF
		JSA97526	CAT. NO. TABLE FOR PLASTIC TAPE PACKAGED 1mm SPACING SMT CONN.	SFW__S-2ST_E9LF
SFW_S-6ST(M)E9LF	Cable dwg.	JSA97527	PLASTIC TAPE PACKAGED 1mm SPACING SMT CONNECTOR	SFW__S-2ST_E9LF
		JSA93340	RECOMMENDED CABLE	SFW__S-2ST__LF
		JSA93341	RECOMMENDED CABLE	SFW__S-2ST__LF
	Manual	BJM-SFWS101		
	Specification	SC-SFWS04		
	Connector dwg.	JSA96521	CAT. NO. TABLE FOR 1mm SPACING SMT CONNECTOR	SFW__S-6ST__LF
		JSA96522	1mm SPACING SURFACE MOUNT CIC CONNECTOR	SFW__S-6ST__LF
		JSA96523	1mm SPACING SURFACE MOUNT CIC CONNECTOR	SFW__S-6STM__LF
		JSA97528	CAT. NO. TABLE FOR PLASTIC TAPE PACKAGED 1mm SPACING SMT CONN.	SFW__S-6ST_E9LF
		JSA97529	PLASTIC TAPE PACKAGED 1mm SPACING SMT CONNECTOR	SFW__S-6ST_E9LF
	Cable dwg.	JSA93904	RECOMMENDED CABLE	SFW__S-6ST__LF
	Manual	BJM-SFWS102		

mat'l. code		surface 58		tolerance		projection		product family		58SF		CODE	
ltr	ecn no	dr	date	ISO 1302	ISO 406	ISO 1101	ISO 1101	product family	58SF	CODE	JP		
A	J09-0202	M.Y	2009-5-25	tolerances unless otherwise specified				SFW_S Documents Configuration		(1mm Spacing connector)			
angles		linear		scale		mm		dwg no		sheet 1 of 1		size	
								JSA97525		A4			
dr		engr		chr		appd		type		Product Customer Drawing		Rev.	
												A	
sheet index		revision		sheet		sheet		sheet		sheet		sheet	
A		A		1		1		1		1		1	

CAT. NO. & DIMENSIONS

NOTE3	NO. OF CONTACTS (n)	CAT. NO.	DIMENSIONS (NOTE2)		
			A ±0.2	B ±0.2	C ±0.2
	4	SFW4S-2ST__LF	10.4	5.24	3
	5	SFW5S-2ST__LF	11.4	6.24	4
	6	SFW6S-2ST__LF	12.4	7.24	5
*	7	SFW7S-2ST__LF	13.4	8.24	6
	8	SFW8S-2ST__LF	14.4	9.24	7
*	9	SFW9S-2ST__LF	15.4	10.24	8
	10	SFW10S-2ST__LF	16.4	11.24	9
	11	SFW11S-2ST__LF	17.4	12.24	10
*	12	SFW12S-2ST__LF	18.4	13.24	11
	13	SFW13S-2ST__LF	19.4	14.24	12
	14	SFW14S-2ST__LF	20.4	15.24	13
	15	SFW15S-2ST__LF	21.4	16.24	14
	16	SFW16S-2ST__LF	22.4	17.24	15
	17	SFW17S-2ST__LF	23.4	18.24	16
*	18	SFW18S-2ST__LF	24.4	19.24	17
*	19	SFW19S-2ST__LF	25.4	20.24	18
	20	SFW20S-2ST__LF	26.4	21.24	19
*	21	SFW21S-2ST__LF	27.4	22.24	20
	22	SFW22S-2ST__LF	28.4	23.24	21
	23	SFW23S-2ST__LF	29.4	24.24	22
	24	SFW24S-2ST__LF	30.4	25.24	23
*	25	SFW25S-2ST__LF	31.4	26.24	24
	26	SFW26S-2ST__LF	32.4	27.24	25
*	27	SFW27S-2ST__LF	33.4	28.24	26
	28	SFW28S-2ST__LF	34.4	29.24	27
	29	SFW29S-2ST__LF	35.4	30.24	28
	30	SFW30S-2ST__LF	36.4	31.24	29
*	31	SFW31S-2ST__LF	37.4	32.24	30
*	32	SFW32S-2ST__LF	38.4	33.24	31

CAT. NO. SFW (n) S - 2 ST - - - LF

SERIES

NO. OF CONTACTS

STRAIGHT TYPE

FOR FPC / FFC

VARIATION

STM : FOR AUTOMATIC MOUNTING (SMT)
WITH MOUNTING PLATE

ST : FOR AUTOMATIC MOUNTING (SMT)
WITHOUT MOUNTING PLATE

PACKAGE STYLE



LEAD FREE

NOTES

- THIS PRODUCT IS THE CONNECTOR, DESIGNED TO TERMINATE FPC/FFC AND COPER WITH AUTOMATIC MOUNTING (SMT).
- SEE PART DRAWINGS FOR DIMENSIONS A.B.C.
- PLEASE CONSULT US IN CASE OF USING PARTS WITH * MARK

mat'l. code				surface 58 / tolerance ISO 1302 ✓ ISO 406 ISO 1101		projection		product family 58SF		CODE JP	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title CAT. NO. TABLE FOR 1mm SPACING SMT CONNECTOR (CAT.No.SFW__S-2ST__LF)			
A	J05-0377	H.T	2005-6-22	angles	linear						
B	J05-0547	H.T	2005-8-30			scale X		dwg no sheet 1 of 1 size JSA 96516 A4			
C	J06-0430	H.T	2006-10-19								
D	J07-0407	H.T	2007-8-9	dr	engr	FCI		type Product Customer Drawing			
				chr	appd						
sheet index	revision	D	1								Rev. D

SC-SFWS 03 JSA96517 96518 96519 96520 93340 93341
form: A4

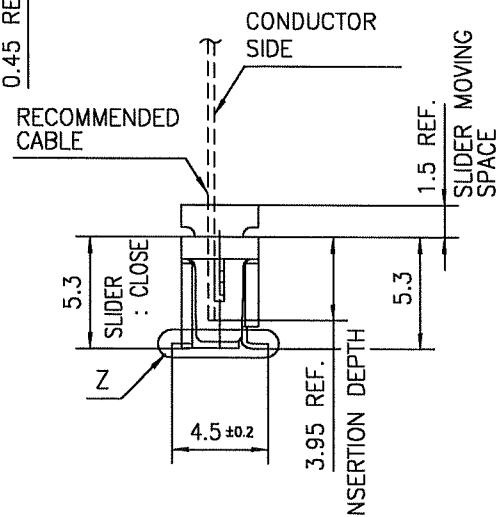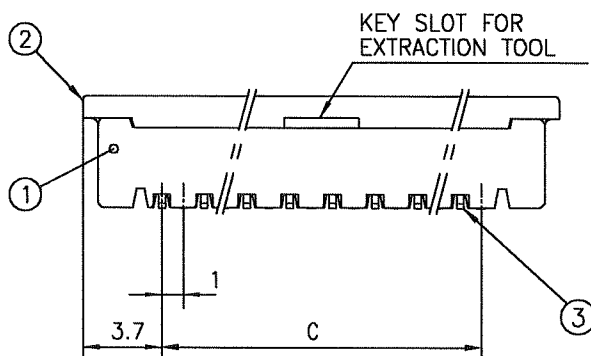


PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	GLASS FILLED THERMOPLASTIC RATED. (UL94V-0)	1	COLOR : BROWN
2	SLIDER		1	COLOR : BLACK
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : TIN Ni UNDER PLATED(LEAD FREE)



n : NO. OF CONTACTS

NOTES


1. THIS PRODUCT IS THE CONNECTOR DESIGNED TO TERMINATE FPC/FFC AND CYPES WITH AUTOMATIC MOUNTING (SMT).
2. FLATNESS OF CONTACT TERMINAL MUST BE WITHIN TOLERANCE IN Z PORTION DETAILED DRAWING.
3. THIS DIMENSION IS SPACE FOR THE NOZZLE OF MOUNTER.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A REFLOW SOLDERING OVEN.

RECOMMENDED PC BOARD LAYOUT (COMPONENT SIDE)

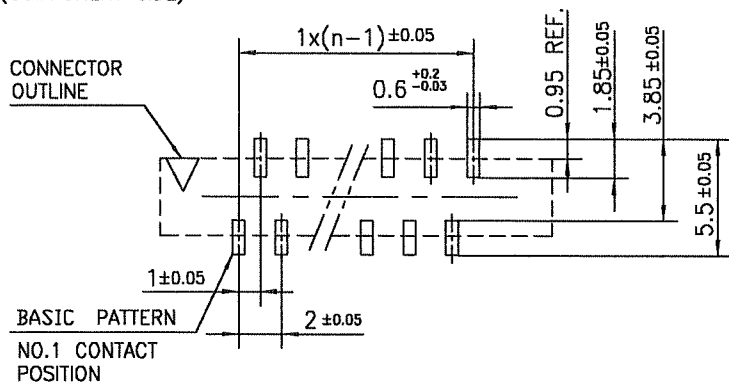

mat'l. code				surface 58 ISO 1302		tolerance ISO 406 ISO 1101		projection 		product family 58SF				CODE JP			
ltr	ecn no	dr	date	tolerances unless otherwise specified								title 1mm SPACING SURFACE MOUNT FPC/FFC CONNECTOR (CAT.No.SFW__S-2ST__LF)					
A	J05-0377	H.T	6/22/05	angles	linear	±0.2											
B	J05-0731	H.T	10/28/05														
C	J06-0430	H.T	10/19/06														
				dr			10/19/06				dwg no				sheet 1 of 1		size
				enr			10/19/06				JSA 96517				A4		
				chr			10/19/06				type Product Customer Drawing						
				appd			10/20/06										
sheet index		revision		C												Rev c	
		sheet		1													

SC-SFWS 03 JSA96516
form: A4

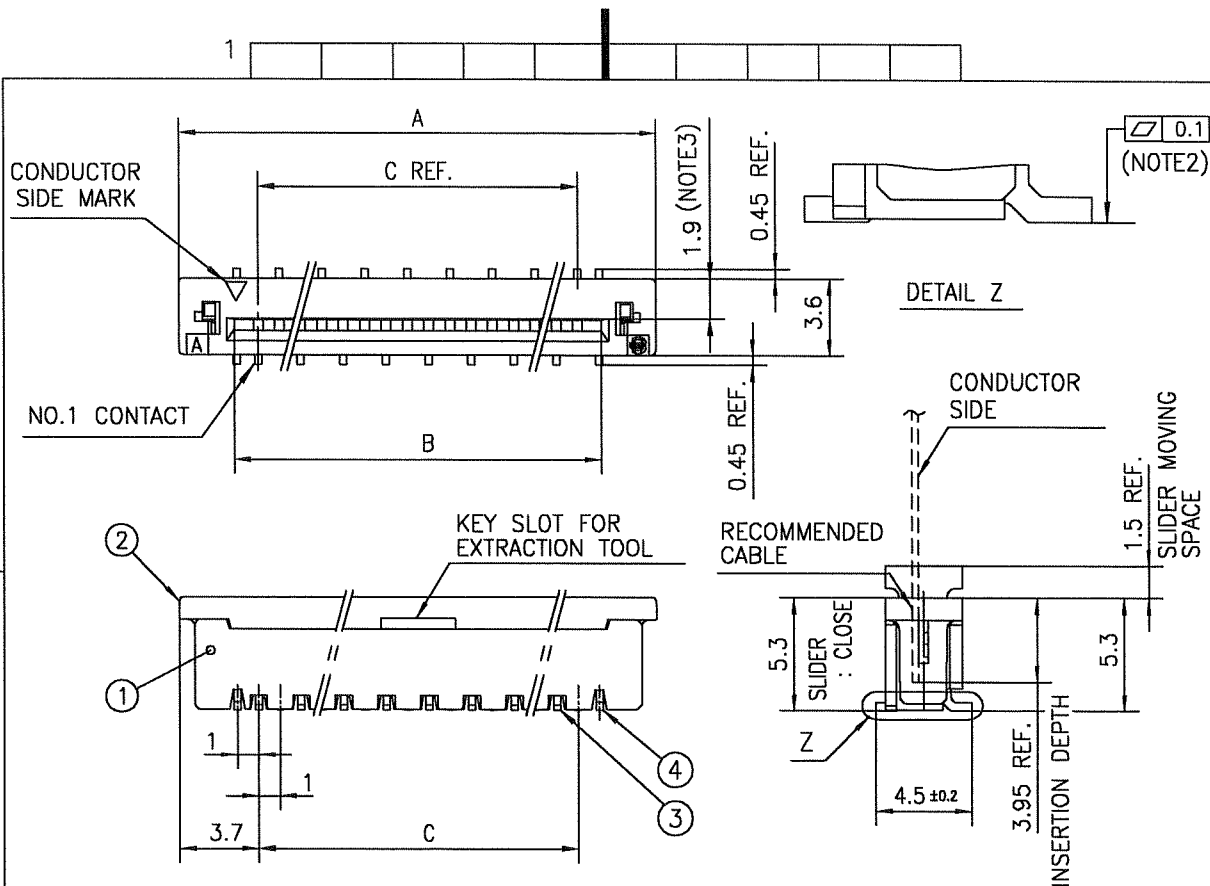


PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	HOUSING	GLASS FILLED THERMOPLASTIC RATED. (UL94V-0)	1	COLOR : BROWN
2	SLIDER		1	COLOR : BLACK
3	CONTACT	PHOSPHOR BRONZE	n	PLATING : TIN Ni UNDER PLATED(LEAD FREE)
4	MOUNTING PLATE	BRASS	2	

n : NO. OF CONTACTS

NOTES

1. THIS PRODUCT IS THE CONNECTOR DESIGNED TO TERMINATE FPC/FFC AND COPS WITH AUTOMATIC MOUNTING (SMT).
2. FLATNESS OF CONTACT TERMINAL AND MOUNTING PLATE MUST BE WITHIN TOLERANCE IN Z PORTION DETAILED DRAWING.
3. THIS DIMENSION IS SPACE FOR THE NOZZLE OF MOUNTER.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A REFLOW SOLDERING OVEN.

RECOMMENDED PC BOARD LAYOUT (COMPONENT SIDE)

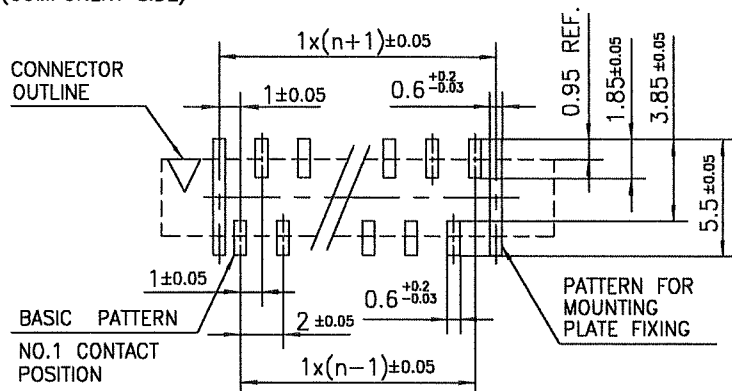

mat'l. code				surface 58	tolerance	projection	product family	58SF	CODE
				ISO 1302	ISO 406				JP
				tolerances unless otherwise specified					
ltr	ecn no	dr	date	angles	linear	mm	title		
A	J05-0377	H.T	6/22/05				1mm SPACING SURFACE MOUNT		
B	J05-0731	H.T	10/28/05				FPC/FFC CONNECTOR		
C	J06-0430	H.T	10/19/06				(CAT.No.SFW__S-2STM__LF)		
				dr	10/19/06	FCI	dwg no		sheet 1 of 1
				enr	10/19/06		JSA 96518		size
				chr	10/19/06				A4
				appd	10/20/06		type		Product Customer Drawing
sheet	revision	C							Rev.
index	sheet	1							C

SC-SFWS 03 JSA96516
form: A4

CAT. NO. & DIMENSIONS

(NOTE4)	NO. OF CONTACTS (n)	CAT. NO. (NOTE2)	DIMENSIONS (NOTE3)		
			D MAX.	E ± 0.3	F ± 0.1
	4	SFW4S-2ST_E9LF	30.4	24	—
	5	SFW5S-2ST_E9LF	30.4	24	—
	6	SFW6S-2ST_E9LF	30.4	24	—
*	7	SFW7S-2ST_E9LF	30.4	24	—
	8	SFW8S-2ST_E9LF	30.4	24	—
*	9	SFW9S-2ST_E9LF	30.4	24	—
	10	SFW10S-2ST_E9LF	30.4	24	—
	11	SFW11S-2ST_E9LF	30.4	24	—
*	12	SFW12S-2ST_E9LF	38.4	32	28.4
	13	SFW13S-2ST_E9LF	38.4	32	28.4
	14	SFW14S-2ST_E9LF	38.4	32	28.4
	15	SFW15S-2ST_E9LF	38.4	32	28.4
	16	SFW16S-2ST_E9LF	50.4	44	40.4
	17	SFW17S-2ST_E9LF	50.4	44	40.4
*	18	SFW18S-2ST_E9LF	50.4	44	40.4
*	19	SFW19S-2ST_E9LF	50.4	44	40.4
	20	SFW20S-2ST_E9LF	50.4	44	40.4
*	21	SFW21S-2ST_E9LF	50.4	44	40.4
	22	SFW22S-2ST_E9LF	50.4	44	40.4
	23	SFW23S-2ST_E9LF	50.4	44	40.4
	24	SFW24S-2ST_E9LF	50.4	44	40.4
*	25	SFW25S-2ST_E9LF	50.4	44	40.4
	26	SFW26S-2ST_E9LF	50.4	44	40.4
*	27	SFW27S-2ST_E9LF	62.4	56	52.4
	28	SFW28S-2ST_E9LF	62.4	56	52.4
	29	SFW29S-2ST_E9LF	62.4	56	52.4
	30	SFW30S-2ST_E9LF	62.4	56	52.4
*	31	SFW31S-2ST_E9LF	62.4	56	52.4
*	32	SFW32S-2ST_E9LF	62.4	56	52.4

CAT. NO. SFW (n) S - 2 ST_ _ _ LF

SERIES

NO. OF CONTACTS

STRAIGHT TYPE

FOR FPC / FFC

VARIATION

STM:FOR AUTOMATIC MOUNTING (SMT)
WITH MOUNTING PLATE

ST:FOR AUTOMATIC MOUNTING (SMT)
WITHOUT MOUNTING PLATE


PACKAGE STYLE

LEAD FREE


NOTES

1. THIS PRODUCT IS THE CONNECTOR DESIGNED TO TERMINATE FPC/FFC AND COTES WITH AUTOMATIC MOUNTING (SMT).
2. THIS CATALOG NO. INDICATES PLASTIC TAPE PACKAGED CONNECTOR.
3. SEE PART DRAWINGS FOR DIMENSIONS D~F.
4. PLEASE CONSULT US IN CASE OF USING PARTS WITH * MARK.

mat'l. code				surface 58/ tolerance ISO 1302 406 ISO 1101		projection		product family 58SF		CODE JP	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title CAT NO. TABLE FOR PLASTIC TAPE PACKAGED 1mm SPACING SMT CONN. (CAT.No.SFW__S-2ST_E9LF)			
A	J09-0202	M.Y	2009-5-25	angles	linear						
				dr	H.YAMASHITA	2009-5-25	FCI		dwg no sheet 1 of 1 size JSA 97526 A4		
				engr	H.YAMASHITA	2009-5-25					
				chr	S. Nishida	2009-5-25					
				appd	S. Nishida	2009-5-25					
sheet index		revision sheet	A 1					type Product Customer Drawing		Rev. A	

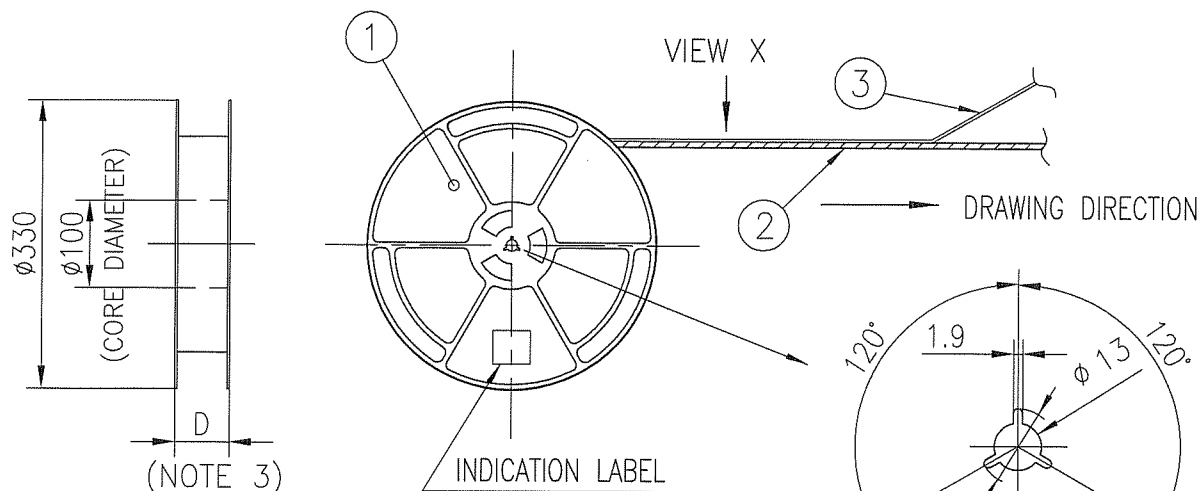

DRAWING DIRECTION

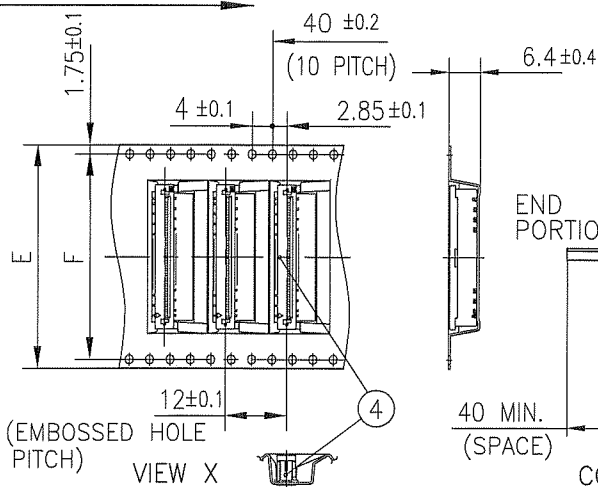

DRAWING DIRECTION

400 MIN.
(COVER TAPE
LEADER PORTION)CONNECTOR PACKAGING
PORTION20 HOLES MIN.
(SPACE)

PT. NO.	PARTS NAME	CAT. NO.	MATERIAL	Q'TY	NOTE
1	REEL	—	POLYSTYRENE	1	COLOR : WHITE or BLACK
2	PLASTIC (EMBOSSED) TAPE	—	PET	—	COLOR : TRANSPARENCY
3	COVER	—	POLYESTER	—	COLOR : TRANSPARENCY
4	CONNECTOR	SFW__S-2ST_LF	SEE ATTACHED DWG.	500	—

NOTES


- THIS IS PLASTIC TAPE PACKAGED CONNECTOR USED FOR FPC/FFC AND CYPES WITH AUTOMATIC MOUNTING (SMT).
- SEE JIS C 0806 (PACKING OF ELECTRONIC COMPONENTS ON CONTINUOUS TAPES (SURFACE MOUNTING DEVICES)) FOR SHAPE AND DIMENSIONS OF PLASTIC (EMBOSSED) TAPE AND REEL.
- F DIMENSION IS PORTION OF THE CORE.

mat'l. code				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family 58SF	CODE JP
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm	title PLASTIC TAPE PACKAGED 1mm SPACING SMT CONNECTOR (Cat. No. SFW__S-2ST_E9LF)	
A	J09-0202	M.Y	2009-5-25	angles	linear	scale	dwg no	
				±5°			sheet 1 of 1	
				dr	engr	chr	JSA 97527	
				appd			size	
							A4	
							type Product Customer Drawing	
sheet index	revision	A						Rev. A
	sheet	1						

SC-SFWS03 JSA97525 97526
form: A4

RECOMMENDED CABLE (FPC)

n : NO. OF CONDUCTORS

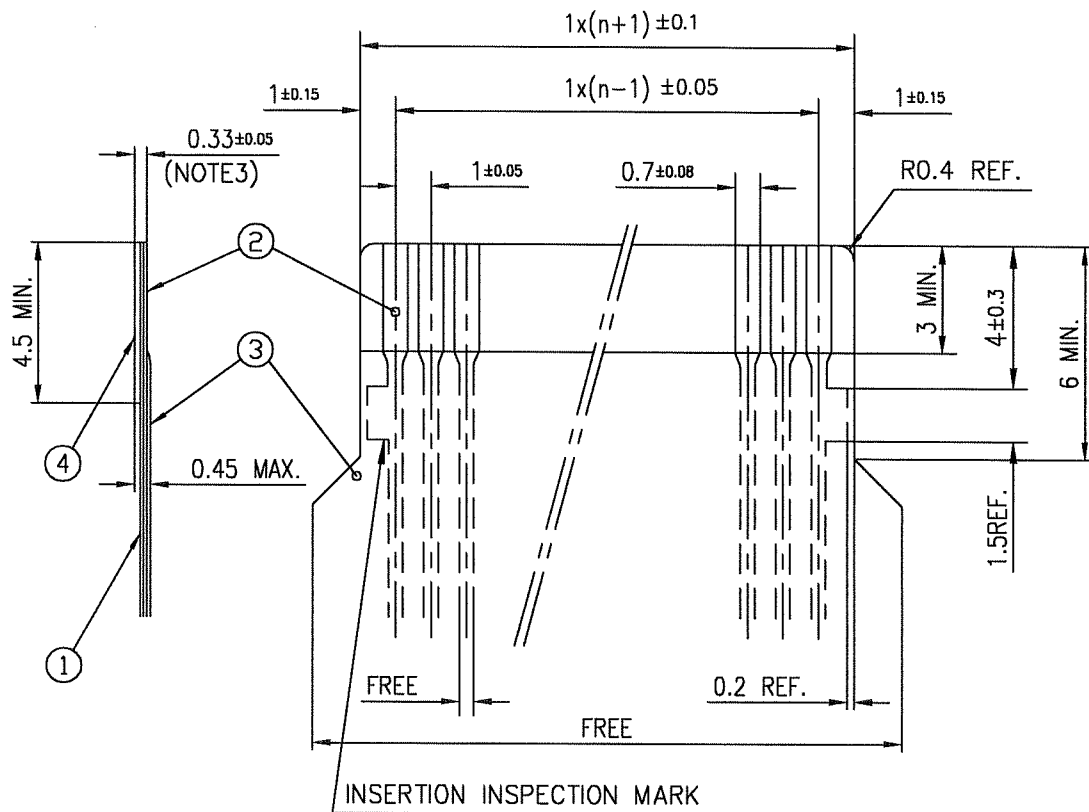

PT. NO.	DESCRIPTION	MATERIAL	THICKNESS (μm)
1	BASE FILM	POLYIMIDE OR POLYESTER OR EQUIVALENT	25
2	CONDUCTOR	COPPER FOIL(PLATING : SOLDER $1\mu\text{m}$ MIN.)	35
3	OVERLAY	POLYIMIDE OR POLYESTER OR EQUIVALENT	—
4	SUPPORTING TAPE	POLYESTER OR POLYIMIDE OR EQUIVALENT	188

NOTES

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.
3. TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.

mat'l. code				surface 58 / tolerance ISO 406 / ISO 1101		projection		product family 58SF		CODE JP	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title			
AA	J04-0333	H.T	Oct.13/04					RECOMMENDED CABLE			
AB	J06-0430	H.T	10/19/06	angles	linear			(CAT.No.SFW__S-2ST__)			
						scale X		dwg no			
						FCI		sheet 1 of 1 size			
								JSA 93340 A4			
								type Product Customer Drawing			
sheet index		revision	AB							Rev. AB	
		sheet	1								

form: A4

1

2

RECOMMENDED CABLE (FFC)

n : NO. OF CONDUCTORS



PT. NO.	DESCRIPTION	MATERIAL	NOTE
1	INSULATOR	FLAME RESISTING POLYESTER OR EQUIVALENT	_____
2	CONDUCTOR	COPPER FOIL	PLATING: TIN OR SOLDER 1μm MIN.
3	SUPPORTING TAPE	FLAME RESISTING POLYESTER OR EQUIVALENT	_____

NOTES

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.

mat'l. code				surface 5B / tolerance ISO 406 ISO 1101		projection		product family 58SF		CODE JP	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title			
AA	J04-0333	H.T	06/13/04					RECOMMENDED CABLE			
AB	J06-0430	H.T	10/19/06	angles linear		scale X		(CAT.No.SFW__S-2ST__)			
				dr		10/19/06		dwg no sheet 1 of 1 size			
				enr		10/19/06		JSA 93341 A4			
				chr		10/19/06		type Product Customer Drawing			
				appd		10/20/06					
sheet index		revision	AB							Rev. AB	

form: A4

1

2



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.