


## ► General data

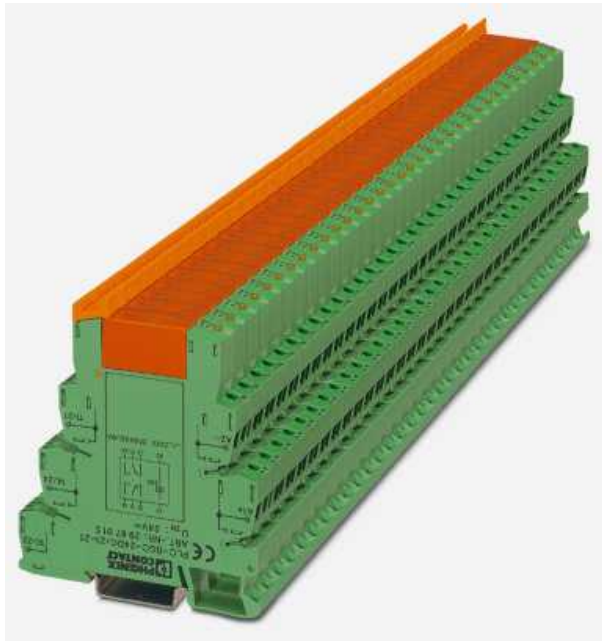

PLC relay, consisting of base terminal block PLC-BSC.../21 with screw connection and pluggable miniature relay with power contact, for assembly on mounting rail NS 35/7.5, 2 PDT, input voltage 120 V AC / 110 V DC

Order number	2967086
Type	PLC-RSC-120UC/21-21

Barcode number	4017918156398
Unit pack	10 Pcs.
Customs tariff	85364900990

## ► Technical data

### Coil side

Nominal input voltage $U_N$	120 V AC
Nominal input voltage $U_N$	110 V DC
Nominal input current at $U_N$	4.5 mA (At $U_N = 120$ V AC)
Nominal input current at $U_N$	4.2 mA (At $U_N = 110$ V DC)
Typical response time	7 ms
Typical release time	10 ms
Operating voltage display	Yes
Protective circuit/component	Bridge rectifier

### Contact side

Contact type	Single contact, 2 PDT
Contact material	AgNi
Maximum switching voltage	250 V AC/DC (The separating plate PLC-ATP should be installed for voltages larger than 250 V (L1, L2, L3) between identical terminal blocks in adjacent modules. Potential bridging is then carried out with FBST 8-PLC... or ...FBST 500...)
Minimum switching voltage	5 V
Maximum inrush current	8 A
Min. switching current	10 mA
Limiting continuous current	6 A
Power rating (ohmic load) max.	140 W (For 24 V DC)
Power rating (ohmic load) max.	100 W (For 48 V DC)
Power rating (ohmic load) max.	60 W (For 60 V DC)
Power rating (ohmic load) max.	44 W (For 110 V DC)
Power rating (ohmic load) max.	60 W (For 220 V DC)
Power rating (ohmic load) max.	1500 VA (for 250 V AC)
Switching capacity min.	50 mW

### General data

Length	80 mm
Height	94 mm
Width	14 mm
Test voltage relay winding/relay contact	4 kV AC
Ambient temperature (operation)	-20 °C ... 60 °C
Operating mode	100% operating factor
Service life mechanical	3 x 10 <sup>7</sup> cycles
Inflammability class acc. to UL 94	V0
Standards/regulations	IEC 60 664/IEC 60 664 A/DIN VDE 0110, contamination class 2, surge voltage category III, DIN VDE 0106-101: 1986-11, increased isolation I/O
Standards/regulations	DIN EN 50 178/VDE 0160/VDE 0160, IEC 60 255/DIN VDE 0435 (in relevant parts)

### Connection data

Screw thread	M 3
Stripping length	8 mm
Type of connection	Screw connection
Min. conductor cross section, rigid	0.14 mm <sup>2</sup>
Conductor cross section, rigid max.	2.5 mm <sup>2</sup>
Conductor cross section flexible min.	0.14 mm <sup>2</sup>
Max. conductor cross section, flexible	2.5 mm <sup>2</sup>
Min. conductor cross section AWG/kcmil	26
Conductor cross section AWG/kcmil max	14

## ► Certificates

---

### CUL

Comments	Input
Nominal voltage $U_N$	120 V
AWG/kcmil	30-12
Comments	Output
Nominal voltage $U_N$	250 V
Nominal current $I_N$	6 A
AWG/kcmil	30-12

---

### UL


Comments	Input
Nominal voltage $U_N$	120 V
AWG/kcmil	30-12
Comments	Output
Nominal voltage $U_N$	250 V
Nominal current $I_N$	6 A
AWG/kcmil	30-12

---


## ▸ Drawings

---

### Diagram



### Circuit diagram

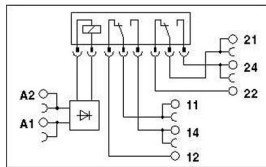

### Approval logo



## Documentation

### Order key

PLC-R\_Order key

Component	Connection system	Nominal input voltage	Contact type	Contact type	Series (writing principle)
<b>PLC</b> H = equipped with relay B = basic terminal block base	MC terminal connections (active) SP terminal cage (passive)	5DC = 5 V DC 12DC = 12 V DC 24DC = 24 V DC 24AC = 24 V AC/DC 48DC = 48 V DC 60DC = 60 V DC 120DC = 120 V DC 120AC = 120 V AC 115VDC = 115 V DC 230VDC = 230 V DC 230VAC = 230 V AC	1 = 1 NO contact 2 = 1 NO contact 2S = 1 NO/1 S contact 1-1 = 2 NO contacts 2S-2S = 2 NO/2 S contacts	100% independent power contact IC = Contacts for high inrush currents HC = Contacts for high inrush currents AS = Hard gold-plated contacts for wear loads	100% independent series ACT = indicator contacts for output signals BEB = contact series for input signals

## ► Accessories

Item	Designation	Description
<b>Assembly</b>		
0801733	NS 35/ 7,5 GELOCHT METER	DIN rail, material: Steel, perforated, height 7.5 mm, width 35 mm, length: 2 m
0801681	NS 35/ 7,5 UNGELOCHT METER	DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m
0801762	NS 35/ 7,5-CU UNGELOCHT METER	DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m
0801377	NS 35/ 7,5-V2A UNGELOCHT	DIN rail, material: High-grade steel V2A, unperforated, height 5.5 mm, width 15 mm, length: 2 m
1201730	NS 35/15 GELOCHT METER	DIN rail, material: Steel, perforated, height 15 mm, width 35 mm, length: 2 m
1201714	NS 35/15 UNGELOCHT METER	DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m
1201798	NS 35/15-2,3 UNGELOCHT METER	DIN rail, material: Steel, unperforated, 2.3 mm thick, height 15 mm, width 35 mm, length: 2 m
1201756	NS 35/15-AL UNGELOCHT METER	DIN rail, deep-drawn, high profile, unperforated, 1.5 mm thick, material: Aluminum, height 15 mm, width 35 mm, length 2 m
1201895	NS 35/15-CU UNGELOCHT METER	DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m
2966841	PLC-ATP BK	Separating plate, 2 mm thick, required at the start and end of a PLC terminal strip. Furthermore, it is used for: -visual separation of groups, -safe isolation of different voltages of neighboring PLC relays in acc. with DIN VDE 0106-101, -isolation
<b>Bridges</b>		
2966812	FBST 6-PLC BU	Plug-in bridge, 2-pos., 6 mm long, insulated, for potential distribution with PLC, color of the insulation material: Blue
2966825	FBST 6-PLC GY	Plug-in bridge, 2-pos., 6 mm long, insulated, for potential distribution with PLC, color of the insulation material: Gray
2966236	FBST 6-PLC RD	Plug-in bridge, 2-pos., 6 mm long, insulated, for potential distribution with PLC, color of the insulation material: Red
2967688	FBST 8-PLC GY	Plug-in bridge, 2-pos., 8 mm long, insulated, for potential distribution with PLC, with separating plate, color of the insulation material: Gray
2967691	FBST 14-PLC BK	Plug-in bridge, 2-pos., 14 mm long, insulated, to increase efficiency with PLC...IC and PLC..HC, color of the insulation material: Black
2966692	FBST 500-PLC BU	Continuous plug-in bridge, 500 mm long, insulated, can be cut to length, for potential distribution with PLC..., color of the insulating material: Blue
2966838	FBST 500-PLC GY	Continuous plug-in bridge, 500 mm long, insulated, can be cut to length, for potential distribution with PLC..., color of the insulating material: Gray
2966786	FBST 500-PLC RD	Continuous plug-in bridge, 500 mm long, insulated, can be cut to length, for potential distribution with PLC..., color of the insulating material: Red

**Marking**

1053001	ZB 10:UNBEDRUCKT	Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks, for a terminal width of 10.2 mm, color: White
1053014	ZB10,LGS:FORTL.ZAHLEN	Zack strip, printed horizontally: 10-section, with the numbers, 1-10, 11-20 etc. up to 991-1000, color: white
5060883	ZB10/WH-100:UNBEDRUCKT	Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, for a terminal width of 10.2 mm, color: White

---

## ► Address

---

Phoenix Contact GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel + 49 - (0) 52 35 - 3-00  
Fax + 49 - (0) 52 35 - 3-4 12 00  
[www.phoenixcontact.com](http://www.phoenixcontact.com)

© Phoenix Contact  
Technical modifications reserved





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.