

# SMT POWER INDUCTORS

## Shielded Drum Core - P1168NL/P1169NL Series



-  **Height:** 4.5mm Max
-  **Footprint:** 12.2mm x 12.2mm Max
-  **Current Rating:** up to 14A
-  **Inductance Range:** .32μH to 750μH


### Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C

| Part <sup>2,3</sup><br>Numbers |             | Inductance<br>@0A <sub>DC</sub><br>(μH) | Inductance<br>@I <sub>rated</sub><br>(μH) MIN | I <sub>rated</sub> <sup>5</sup><br>(A <sub>DC</sub> ) | DCR (mΩ) |      | Saturation<br>Current<br>-25% (A) | Heating <sup>7</sup><br>Current<br>+40°C(A) | Core Loss<br>Factor<br>(K2) | SRF<br>(MHz) |
|--------------------------------|-------------|-----------------------------------------|-----------------------------------------------|-------------------------------------------------------|----------|------|-----------------------------------|---------------------------------------------|-----------------------------|--------------|
|                                |             |                                         |                                               |                                                       | TYP      | MAX  |                                   |                                             |                             |              |
| P1168.501NL                    | P1169.501NL | 0.5*                                    | 0.32                                          | 14                                                    | 1.9      | 2.3  | 18                                | 14                                          | 100                         | >40          |
| P1168.102NL                    | P1169.102NL | 1.0*                                    | 0.65                                          | 11                                                    | 3.0      | 3.7  | 14                                | 11                                          | 150                         | >40          |
| P1168.162NL                    | P1169.162NL | 1.6*                                    | 1.0                                           | 8.5                                                   | 5.4      | 6.3  | 10                                | 8.5                                         | 180                         | >40          |
| P1168.242NL                    | P1169.242NL | 2.4*                                    | 1.6                                           | 7.5                                                   | 6.9      | 8.1  | 8.1                               | 7.5                                         | 220                         | >40          |
| P1168.332NL                    | P1169.332NL | 3.3*                                    | 2.2                                           | 6.4                                                   | 9.5      | 11   | 7.3                               | 6.4                                         | 260                         | >40          |
| P1168.452NL                    | P1169.452NL | 4.5*                                    | 2.9                                           | 6.0                                                   | 11       | 13   | 6.4                               | 6.0                                         | 310                         | 35           |
| P1168.562NL                    | P1169.562NL | 5.6*                                    | 3.6                                           | 5.5                                                   | 13       | 15   | 5.7                               | 5.5                                         | 340                         | 30           |
| P1168.682NL                    | P1169.682NL | 6.8*                                    | 4.4                                           | 4.6                                                   | 18       | 22   | 5.2                               | 4.6                                         | 370                         | 27           |
| P1168.103NL                    | P1169.103NL | 10                                      | 7.5                                           | 3.6                                                   | 29       | 35   | 4.1                               | 3.6                                         | 440                         | 21           |
| P1168.123NL                    | P1169.123NL | 12                                      | 9.0                                           | 3.5                                                   | 32       | 37   | 3.8                               | 3.5                                         | 490                         | 19           |
| P1168.153NL                    | P1169.153NL | 15                                      | 11.3                                          | 3.1                                                   | 40       | 47   | 3.3                               | 3.1                                         | 570                         | 17           |
| P1168.183NL                    | P1169.183NL | 18                                      | 13.5                                          | 2.8                                                   | 48       | 58   | 2.9                               | 2.8                                         | 590                         | 15           |
| P1168.223NL                    | P1169.223NL | 22                                      | 16.5                                          | 2.6                                                   | 55       | 67   | 2.7                               | 2.6                                         | 640                         | 13           |
| P1168.273NL                    | P1169.273NL | 27                                      | 20.3                                          | 2.4                                                   | 67       | 79   | 2.4                               | 2.4                                         | 740                         | 12           |
| P1168.333NL                    | P1169.333NL | 33                                      | 24.8                                          | 2.2                                                   | 76       | 94   | 2.2                               | 2.2                                         | 820                         | 11           |
| P1168.393NL                    | P1169.393NL | 39                                      | 29.3                                          | 1.9                                                   | 101      | 126  | 2.0                               | 1.9                                         | 880                         | 10           |
| P1168.473NL                    | P1169.473NL | 47                                      | 35.3                                          | 1.8                                                   | 112      | 140  | 1.9                               | 1.8                                         | 980                         | 9.0          |
| P1168.563NL                    | P1169.563NL | 56                                      | 42.0                                          | 1.7                                                   | 129      | 157  | 1.7                               | 1.7                                         | 1000                        | 8.0          |
| P1168.683NL                    | P1169.683NL | 68                                      | 51.0                                          | 1.5                                                   | 169      | 202  | 1.5                               | 1.6                                         | 1200                        | 7.0          |
| P1168.823NL                    | P1169.823NL | 82                                      | 61.5                                          | 1.4                                                   | 191      | 232  | 1.4                               | 1.5                                         | 1300                        | 6.0          |
| P1168.104NL                    | P1169.104NL | 100                                     | 75.0                                          | 1.2                                                   | 222      | 270  | 1.2                               | 1.4                                         | 1400                        | 6.0          |
| P1168.124NL                    | P1169.124NL | 120                                     | 90.0                                          | 1.1                                                   | 252      | 316  | 1.1                               | 1.3                                         | 1500                        | 5.5          |
| P1168.154NL                    | P1169.154NL | 150                                     | 113                                           | 1.0                                                   | 346      | 456  | 1.0                               | 1.1                                         | 1700                        | 4.9          |
| P1168.184NL                    | P1169.184NL | 180                                     | 135                                           | 0.90                                                  | 385      | 497  | 0.90                              | 1.1                                         | 1900                        | 4.4          |
| P1168.224NL                    | P1169.224NL | 220                                     | 165                                           | 0.80                                                  | 506      | 681  | 0.80                              | 0.93                                        | 2100                        | 3.7          |
| P1168.274NL                    | P1169.274NL | 270                                     | 203                                           | 0.70                                                  | 596      | 775  | 0.70                              | 0.85                                        | 2300                        | 3.3          |
| P1168.334NL                    | P1169.334NL | 330                                     | 248                                           | 0.66                                                  | 764      | 955  | 0.66                              | 0.75                                        | 2600                        | 2.8          |
| P1168.394NL                    | P1169.394NL | 390                                     | 293                                           | 0.62                                                  | 870      | 1087 | 0.62                              | 0.71                                        | 2800                        | 2.6          |
| P1168.474NL                    | P1169.474NL | 470                                     | 353                                           | 0.57                                                  | 1150     | 1403 | 0.57                              | 0.61                                        | 3100                        | 2.4          |
| P1168.564NL                    | P1169.564NL | 560                                     | 420                                           | 0.53                                                  | 1283     | 1623 | 0.53                              | 0.58                                        | 3300                        | 2.2          |
| P1168.684NL                    | P1169.684NL | 680                                     | 510                                           | 0.50                                                  | 1493     | 1824 | 0.50                              | 0.54                                        | 3700                        | 2.1          |
| P1168.824NL                    | P1169.824NL | 820                                     | 615                                           | 0.44                                                  | 1924     | 2355 | 0.44                              | 0.47                                        | 4000                        | 1.7          |
| P1168.105NL                    | P1169.105NL | 1000                                    | 750                                           | 0.40                                                  | 2174     | 2850 | 0.40                              | 0.45                                        | 4500                        | 1.5          |

\*Inductance at 0A<sub>DC</sub> tolerance on indicated part numbers is ±30%; tolerance is ±20% on all other parts.

NOTES FROM TABLE: (See page 43)

### Mechanical

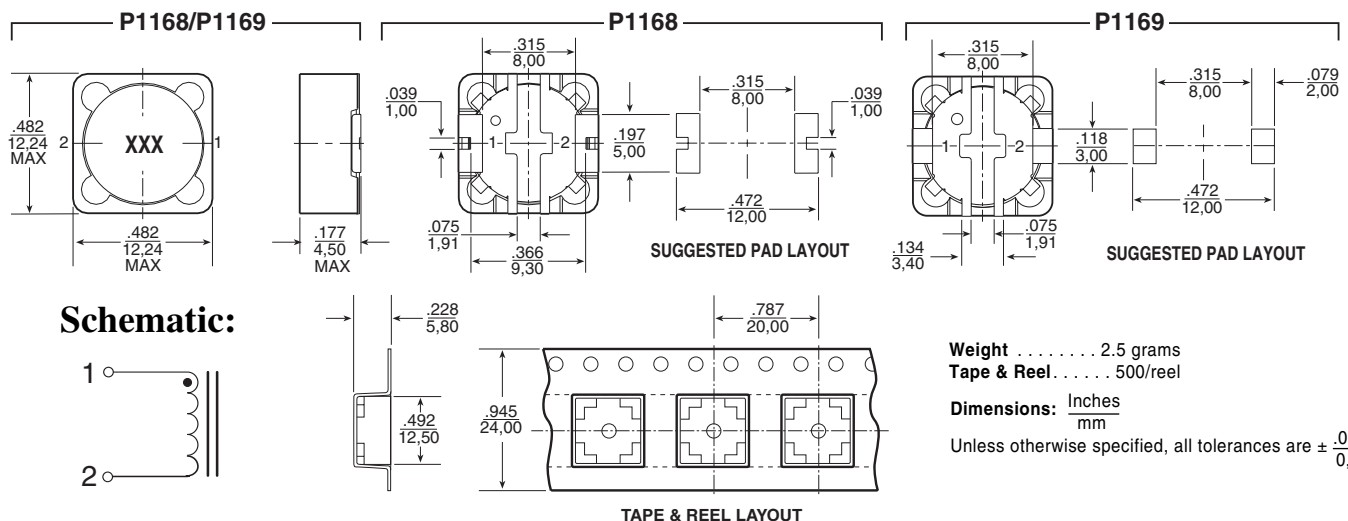

# SMT POWER INDUCTORS

## Shielded Drum Core Series



### Notes from Tables (pages 27 - 42)

1. Unless otherwise specified, all testing is made at 100kHz, 0.1VAC.
2. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. P1166.102NL becomes P1166.102NLT). Pulse complies with industry standard Tape and Tape & Reel specification EIA481.
3. The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.
4. Temperature of the component (ambient plus temperature rise) must be within specified operating temperature range.
5. The rated current (I<sub>rated</sub>) as listed is either the saturation current or the heating current depending on which value is lower.
6. The saturation current, I<sub>sat</sub>, is the current at which the component inductance drops by the indicated percentage (typical) at an ambient temperature of 25°C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
7. The heating current, I<sub>dc</sub>, is the DC current required to raise the component temperature by the indicated delta (approximately). The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes. The temperature is measured by placing the thermocouple on top of the unit under test.

8. In high volt\*time (Et) or ripple current applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. In order to determine the approximate total loss (or temperature rise) for a given application, both copper losses and core losses should be taken into account.

### Estimated Temperature Rise:

$$T_{rise} = [Total\ loss\ (mW) / K0]^{.833}\ (^{\circ}C)$$

$$Total\ loss = Copper\ loss + Core\ loss\ (mW)$$

$$Copper\ loss = I_{RMS}^2 \times DCR\ (Typical)\ (mW)$$

$$I_{rms} = [I_{dc}^2 + \Delta I^2/12]^{1/2}\ (A)$$

$$Core\ loss = K1 \times f\ (kHz)^{1.23} \times B_{ac}(Ga)^{2.38}\ (mW)$$


$$B_{ac}\ (peak\ to\ peak\ flux\ density) = K2 \times \Delta I\ (Ga)$$

$$[= K2/L(\mu H) \times Et(V-\mu Sec)\ (Ga)]$$

where f varies between 25kHz and 1MHz, and B<sub>ac</sub> is less than 2500 Gauss.

K2 is a core size and winding dependant value and is given for each p/n in the proceeding datasheets. K0 & K1 are platform and material dependant constants and are given in the table below for each platform.

| Part No.  | Trise Factor (K0) | Core Loss Factor (K1) |
|-----------|-------------------|-----------------------|
| PG0085/86 | 2.3               | 5.29E-10              |
| PG0087    | 5.8               | 15.2E-10              |
| PG0040/41 | 0.8               | 2.80E-10              |
| P1174     | 0.8               | 6.47E-10              |
| PF0601    | 4.6               | 14.0E-10              |
| PF0464    | 3.6               | 24.7E-10              |
| PF0465    | 3.6               | 33.4E-10              |
| P1166     | 1.9               | 29.6E-10              |
| P1167     | 2.1               | 42.2E-10              |
| PF0560NL  | 5.5               | 136E-10               |
| P1168/69  | 4.8               | 184E-10               |
| P1170/71  | 4.3               | 201E-10               |
| P1172/73  | 5.6               | 411E-10               |
| PF0552NL  | 8.3               | 201E-10               |
| PF0553NL  | 7.1               | 411E-10               |

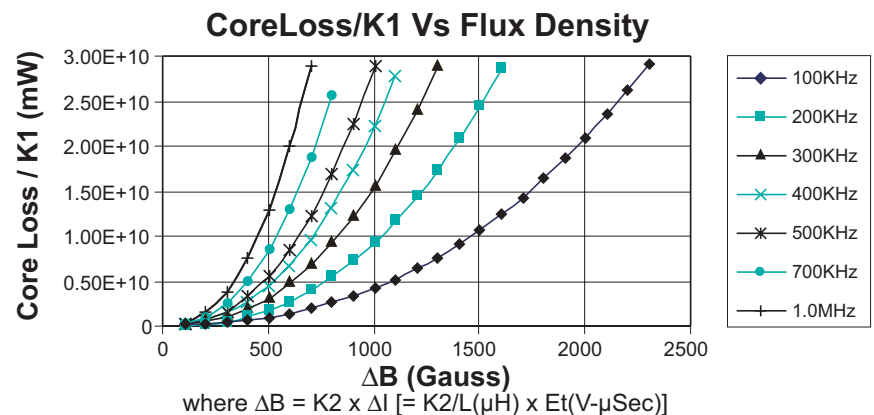

Take note that the component's temperature rise varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.