

# High frequency integral cable accelerometer

## 712F

### SPECIFICATIONS



<b>Sensitivity, ±10%, 25°C</b>		100 mV/g
<b>Acceleration range</b>		60 g peak
<b>Amplitude nonlinearity</b>		1%
<b>Frequency response:</b>	±5%	9.0 - 15,000 Hz
	±10%	6.0 - 20,000 Hz
	±3 dB	3.0 - 25,000 Hz
<b>Resonance frequency, mounted</b>		>45 kHz
<b>Transverse sensitivity, max</b>		3% of axial
<b>Temperature response:</b>	-50°C	-10%
	+120°C	+10%
<b>Power requirement:</b>		
Voltage source		18 - 30 VDC
Current regulating diode		2 - 10 mA
<b>Electrical noise, equiv. g, nominal:</b>		
Broadband	2.5 Hz to 25 kHz	1,000 µg
Spectral	10 Hz	25 µg/√Hz
	100 Hz	10 µg/√Hz
	1,000 Hz	8 µg/√Hz
<b>Output impedance, max</b>		100 Ω
<b>Bias output voltage, nominal</b>		12 VDC
<b>Grounding</b>		case isolated, internally shielded
<b>Temperature range</b>		-50° to +120°C
<b>Vibration limit</b>		±1,000 g
<b>Shock limit, max</b>		5,000 g peak
<b>Sealing</b>		hermetic
<b>Base strain sensitivity, max</b>		0.03 g/µstrain
<b>Sensing element design</b>		PZT ceramic / shear
<b>Weight</b>		35 grams
<b>Case material</b>		316L stainless steel
<b>Mounting</b>		8-32 captive screw with 0.047" diameter safety wire hole
<b>Integral cabling</b>		J9T2AK, 16 ft., blunt cut

Accessories supplied: 8-32 captive screw; calibration data (level 2)



### Key features

- Compact size, lightweight
- High frequency detection (25 kHz)
- Available with M4 mounting thread
- Manufactured in ISO 9001 facility

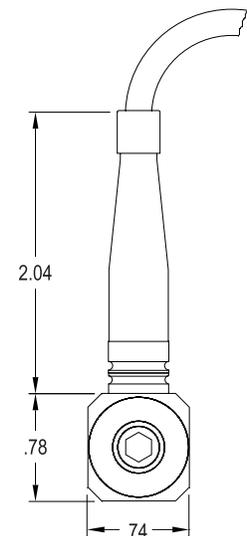

Note: Due to continuous process improvement, specifications are subject to change without notice. This document is cleared for public release.

Connections	
Function	Cable conductor color
power/signal	white
common	black
case	shield



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.