

**METALLIZED POLYPROPYLENE FILM CAPACITOR  
MULTIPURPOSE APPLICATIONS**

**Typical applications:** timing, oscillator circuits, high frequency coupling and decoupling.

PRODUCT CODE: **R79**

**p = 5mm**

All dimensions are in mm.

Pitch (mm)	Box thickness (mm)	Maximum dimensions (mm)		
		B max	H max	L max
5.0	<4.5	B +0.1	H +0.1	L +0.2
5.0	≥4.5	B +0.1	H +0.1	L +0.3

**PRODUCT CODE SYSTEM**

The part number, comprising 14 digits, is formed as follows:

1	2	3	4	5	6	7	8	9	10	11	12	13	14
R	7	9		C								-	

- Digit 1 to 3 Series code
- Digit 4 d.c. rated voltage:  
G = 160V I = 250V  
M = 400V P = 630V
- Digit 5 Pitch: C = 5mm
- Digit 6 to 9 Digits 7 - 8 - 9 indicate the first three digits of Capacitance value and the 6th digit indicates the number of zeros that must be added to obtain the Rated Capacitance in pF.
- Digit 10 to 11 Mechanical version and packaging (table 1)
- Digit 12 Identifies the dimensions and electrical characteristics.
- Digit 13 Internal use.
- Digit 14 Capacitance tolerance:  
H=2.5%; J=5%; K=10%

Table 1 (for more detailed information, please refer to page 14)


Standard packaging style	Lead length (mm)	Ordering code (Digit 10 to 11)
AMMO-PACK		DQ
REEL Ø 355mm		CK
Loose, short leads	4 <sup>+1.5</sup>	AA
Loose, long leads	17 <sup>+1/-2</sup>	Z3

Note: Ammo-pack is the preferred packaging for taped version.

**GENERAL TECHNICAL DATA**

- Dielectric:** polypropylene film.
- Plates:** aluminium layer deposited by evaporation under vacuum.
- Winding:** non-inductive type.
- Leads:** tinned wire, low thermal conductivity.
- Protection:** plastic case, thermosetting resin filled.  
Box material is solvent resistant and flame retardant according to UL94.
- Marking:** manufacturer's logo, series (R79), capacitance, tolerance, D.C. rated voltage.
- Climatic category:** 55/105/56 IEC 60068-1
- Operating temperature range:** -55 to +105°C
- Related documents:** IEC 60384-16

**Winding scheme**

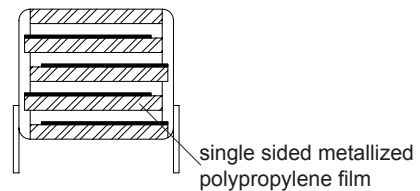

**METALLIZED POLYPROPYLENE FILM CAPACITOR  
MULTIPURPOSE APPLICATIONS**

p = 5 mm

PRODUCT CODE: R79

Rated Cap.	160Vdc/70Vac Std dimensions				Max dv/dt (V/μs)	Max K <sub>0</sub> (V <sup>2</sup> /μs)	Part Number
	B	H	L	p			
0.039 μF	3.5	7.5	7.2	5.0	100	32 E3	R79GC2390--4--
0.047 μF	4.5	9.5	7.2	5.0	100	32 E3	R79GC2470--4--
0.056 μF	4.5	9.5	7.2	5.0	100	32 E3	R79GC2560--4--
0.068 μF	4.5	9.5	7.2	5.0	100	32 E3	R79GC2680--4--
0.082 μF	5.0	10.0	7.2	5.0	100	32 E3	R79GC2820--4--
0.10 μF	5.0	10.0	7.2	5.0	100	32 E3	R79GC3100--4--
0.12 μF	6.0	11.0	7.2	5.0	100	32 E3	R79GC3120--4--
0.15 μF	6.0	11.0	7.2	5.0	100	32 E3	R79GC3150--4--
0.18 μF	7.2	13.0	7.2	5.0	100	32 E3	R79GC3180--4--
0.22 μF	7.2	13.0	7.2	5.0	100	32 E3	R79GC3220--4--

Mechanical version and packaging (Table1) \_\_\_\_\_  
Internal use \_\_\_\_\_  
Tolerance: J (±5%); K (±10%) \_\_\_\_\_

Rated Cap.	400Vdc/200Vac Std dimensions				Max dv/dt (V/μs)	Max K <sub>0</sub> (V <sup>2</sup> /μs)	Part Number
	B	H	L	p			
3900 pF	3.5	7.5	7.2	5.0	400	320 E3	R79MC1390--4--
4700 pF	3.5	7.5	7.2	5.0	400	320 E3	R79MC1470--4--
5600 pF	3.5	7.5	7.2	5.0	400	320 E3	R79MC1560--4--
6800 pF	3.5	7.5	7.2	5.0	400	320 E3	R79MC1680--4--
8200 pF	3.5	7.5	7.2	5.0	400	320 E3	R79MC1820--4--
0.010 μF	3.5	7.5	7.2	5.0	400	320 E3	R79MC2100--4--
0.012 μF	4.5	9.5	7.2	5.0	400	320 E3	R79MC2120--4--
0.015 μF	4.5	9.5	7.2	5.0	400	320 E3	R79MC2150--4--
0.018 μF	5.0	10.0	7.2	5.0	400	320 E3	R79MC2180--4--
0.022 μF	5.0	10.0	7.2	5.0	400	320 E3	R79MC2220--4--
0.027 μF	6.0	11.0	7.2	5.0	400	320 E3	R79MC2270--4--
0.033 μF	6.0	11.0	7.2	5.0	400	320 E3	R79MC2330--4--
0.039 μF	7.2	13.0	7.2	5.0	400	320 E3	R79MC2390--4--
0.047 μF	7.2	13.0	7.2	5.0	400	320 E3	R79MC2470--4--

Rated Cap.	250Vdc/160Vac Std dimensions				Max dv/dt (V/μs)	Max K <sub>0</sub> (V <sup>2</sup> /μs)	Part Number
	B	H	L	p			
0.012 μF	3.5	7.5	7.2	5.0	250	125 E3	R79IC2120--4--
0.015 μF	3.5	7.5	7.2	5.0	250	125 E3	R79IC2150--4--
0.018 μF	3.5	7.5	7.2	5.0	250	125 E3	R79IC2180--4--
0.022 μF	3.5	7.5	7.2	5.0	250	125 E3	R79IC2220--4--
0.027 μF	3.5	7.5	7.2	5.0	250	125 E3	R79IC2270--4--
0.033 μF	3.5	7.5	7.2	5.0	250	125 E3	R79IC2330--4--
0.039 μF	4.5	9.5	7.2	5.0	250	125 E3	R79IC2390--4--
0.047 μF	4.5	9.5	7.2	5.0	250	125 E3	R79IC2470--4--
0.056 μF	4.5	9.5	7.2	5.0	250	125 E3	R79IC2560--4--
0.068 μF	5.0	10.0	7.2	5.0	250	125 E3	R79IC2680--4--
0.082 μF	6.0	11.0	7.2	5.0	250	125 E3	R79IC2820--4--
0.10 μF	6.0	11.0	7.2	5.0	250	125 E3	R79IC3100--4--
0.12 μF	7.2	13.0	7.2	5.0	250	125 E3	R79IC3120--4--
0.15 μF	7.2	13.0	7.2	5.0	250	125 E3	R79IC3150--4--

Mechanical version and packaging (Table1) \_\_\_\_\_  
Internal use \_\_\_\_\_  
Tolerance: H (±2.5%); J (±5%); K (±10%) \_\_\_\_\_

Rated Cap.	630Vdc/220Vac* Std dimensions				Max dv/dt (V/μs)	Max K <sub>0</sub> (V <sup>2</sup> /μs)	Part Number
	B	H	L	p			
1000 pF	3.5	7.5	7.2	5.0	500	630 E3	R79PC1100--4--
1200 pF	3.5	7.5	7.2	5.0	500	630 E3	R79PC1120--4--
1500 pF	3.5	7.5	7.2	5.0	500	630 E3	R79PC1150--4--
1800 pF	3.5	7.5	7.2	5.0	500	630 E3	R79PC1180--4--
2200 pF	3.5	7.5	7.2	5.0	500	630 E3	R79PC1220--4--
2700 pF	3.5	7.5	7.2	5.0	500	630 E3	R79PC1270--4--
3300 pF	3.5	7.5	7.2	5.0	500	630 E3	R79PC1330--4--
3900 pF	4.5	9.5	7.2	5.0	600	630 E3	R79PC1390--4--
4700 pF	4.5	9.5	7.2	5.0	600	630 E3	R79PC1470--4--
5600 pF	4.5	9.5	7.2	5.0	600	630 E3	R79PC1560--4--
6800 pF	5.0	10.0	7.2	5.0	600	630 E3	R79PC1680--4--
8200 pF	5.0	10.0	7.2	5.0	600	630 E3	R79PC1820--4--
0.010 μF	6.0	11.0	7.2	5.0	600	630 E3	R79PC2100--4--
0.012 μF	6.0	11.0	7.2	5.0	600	630 E3	R79PC2120--4--
0.015 μF	7.2	13.0	7.2	5.0	600	630 E3	R79PC2150--4--
0.018 μF	7.2	13.0	7.2	5.0	600	630 E3	R79PC2180--4--

Mechanical version and packaging (Table1) \_\_\_\_\_  
Internal use \_\_\_\_\_  
Tolerance: H (±2.5%); J (±5%); K (±10%) \_\_\_\_\_

All dimensions are in mm.

Note: If the working voltage (V) is lower than the rated voltage (V<sub>R</sub>), the capacitor may work at higher dv/dt. In this case the maximum value allowed is obtained multiplying the above value (see table dv/dt) with the ratio V<sub>R</sub>/V.

The pulse characteristic K<sub>0</sub> depends on the voltage wave-form and in any case it cannot overcome the value given in the above table. The dv/dt test is carried out at 2 times the above values.

\*Not suitable for across-the-line applications. Please refer to Interference Suppression Capacitors (page 145).

**METALLIZED POLYPROPYLENE FILM CAPACITOR  
MULTIPURPOSE APPLICATIONS**

p = 5 mm

PRODUCT CODE: R79

**ELECTRICAL CHARACTERISTICS**

**Rated voltage ( $V_R$ ):** 160Vdc - 250 Vdc 400 Vdc - 630 Vdc

**Rated temperature ( $T_R$ ):** +85°C

**Temperature derated voltage:**

for temperatures between +85°C and +105°C a decreasing factor of 1.25% per degree C on the rated voltage  $V_R$  (d.c. and a.c.) has to be applied.

**Capacitance range:** 1000pF to 0.22  $\mu$ F

**Capacitance values:**

E12 series (IEC 60063 Norm).

**Capacitance tolerances** (measured at 1 kHz):

$\pm 2.5\%$  (H);  $\pm 5\%$  (J);  $\pm 10\%$  (K).

**Total self-inductance (L):**  $\approx 6$  nH

(lead length  $\approx 2$  mm).

**Temperature coefficient** (ppm/°C):

-200 (typical value).

**Dissipation factor (DF):**

$\text{tg} \delta 10^{-4}$  at +25°C  $\pm 5^\circ\text{C}$

kHz	MKP C $\leq 0.1 \mu\text{F}$	MKP C $> 0.1 \mu\text{F}$
	$\text{tg} \delta \times 10^{-4}$	$\text{tg} \delta \times 10^{-4}$
1	$\leq 6$	$\leq 6$
10	$\leq 10$	$\leq 10$
100	$\leq 30$	

**Dielectric absorption (DA):** 0.05%

**Insulation resistance:**

**Test conditions**

Temperature: +25°C  $\pm 5^\circ\text{C}$

Voltage charge time: 1 min

Voltage charge: 100Vdc

**Performance**

$\geq 1 \times 10^5 \text{ M}\Omega$  (Typ.value:  $5 \times 10^5 \text{ M}\Omega$ )

**Test voltage between terminations:**

$1.6 \times V_R$  applied for 2 s at +25°C  $\pm 5^\circ\text{C}$ .

**TEST METHOD AND PERFORMANCE**

**Damp heat, steady state:**

**Test conditions**

Temperature: +40°C  $\pm 2^\circ\text{C}$

Relative humidity (RH): 93%  $\pm 2\%$

Test duration: 56 days

**Performance**

Capacitance change  $|\Delta C/C|$ :  $\leq 3\%$

DF change ( $\Delta \text{tg} \delta$ ):  $\leq 10 \times 10^{-4}$  at 1kHz

Insulation resistance:  $\geq 50\%$  of initial limit.

**Endurance:**

**Test conditions**

Temperature: +85°C  $\pm 2^\circ\text{C}$

Test duration: 1000 h

Voltage applied:  $1.25 \times V_R$

**Performance**

Capacitance change  $|\Delta C/C|$ :  $\leq 3\%$

DF change ( $\Delta \text{tg} \delta$ ):  $\leq 10 \times 10^{-4}$  at 10kHz

Insulation resistance:  $\geq 50\%$  of initial limit.

**Resistance to soldering heat:**

**Test conditions**

Solder bath temperature: +260°C  $\pm 5^\circ\text{C}$

Dipping time (with heat screen): 10 s  $\pm 1$  s

**Performance**

Capacitance change  $|\Delta C/C|$ :  $\leq 2\%$

DF change ( $\Delta \text{tg} \delta$ ):  $\leq 10 \times 10^{-4}$  at 10kHz

Insulation resistance:  $\geq$  initial limit.

**Long term stability** (after two years):

**Storage:** standard environmental conditions (see page 12).

**Performance**





Capacitance change  $|\Delta C/C|$ :  $\leq 0.5\%$

**METALLIZED POLYPROPYLENE FILM CAPACITOR  
MULTIPURPOSE APPLICATIONS**

**p = 5 mm**

PRODUCT CODE: R79

**MAX. VOLTAGE (Vr.m.s.) VERSUS FREQUENCY (sinusoidal wave-form / Th ≤ 40°C)**

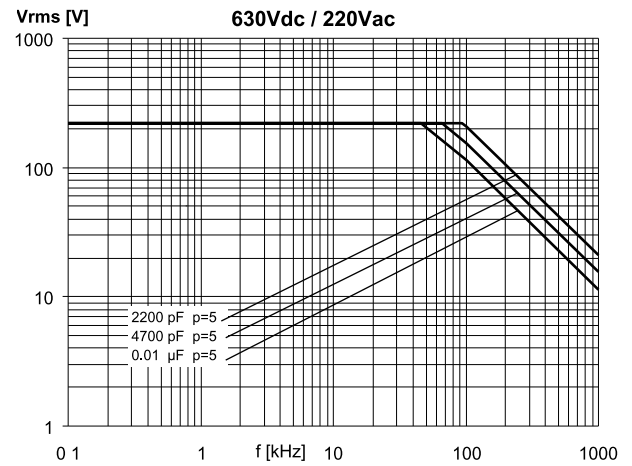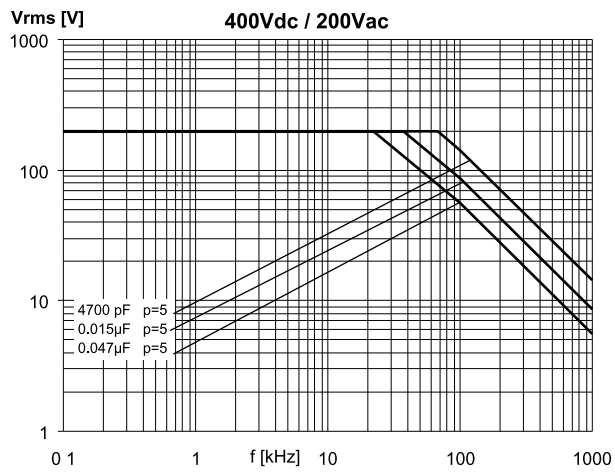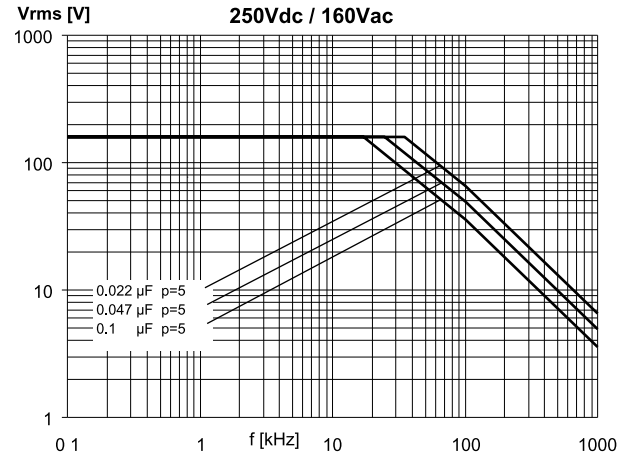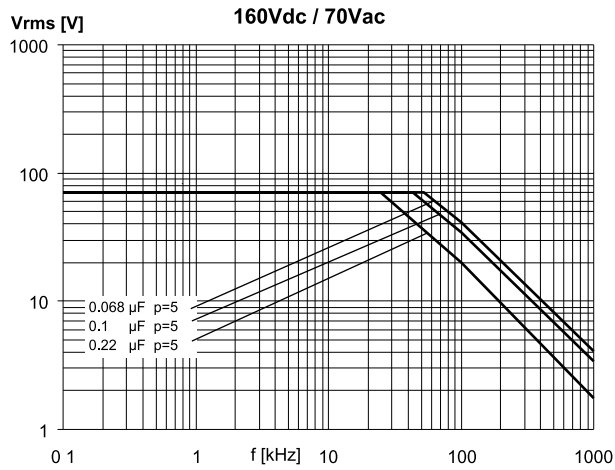





Note: p (pitch) in mm.

**METALLIZED POLYPROPYLENE FILM CAPACITOR  
MULTIPURPOSE APPLICATIONS**

**p = 5 mm**

PRODUCT CODE: **R79**

**MAX. CURRENT ( $I_{r.m.s.}$ ) VERSUS FREQUENCY (sinusoidal wave-form /  $T_h \leq 40^\circ\text{C}$ )**

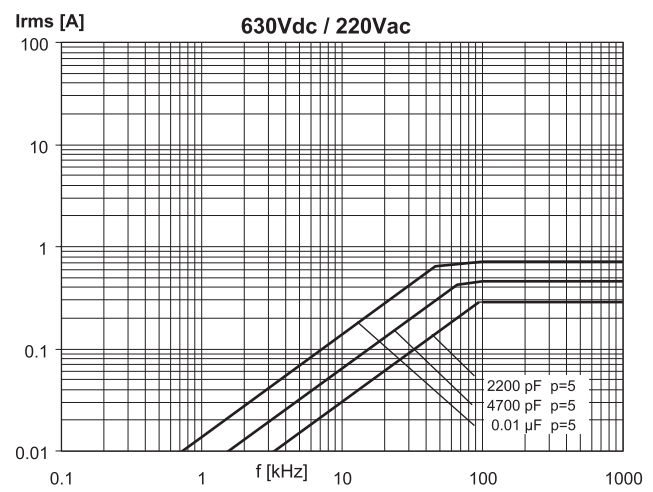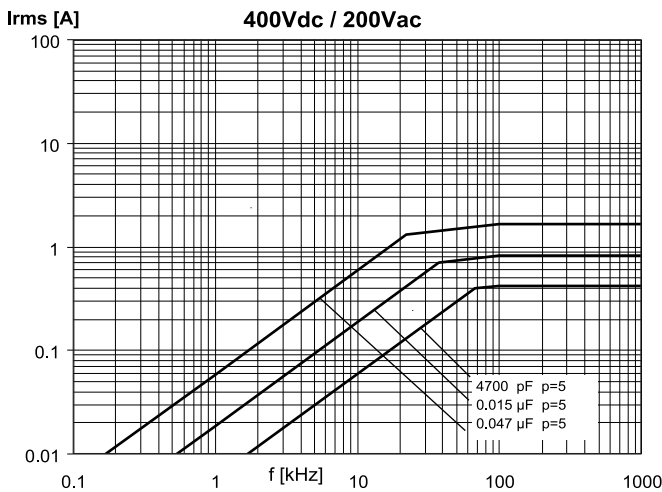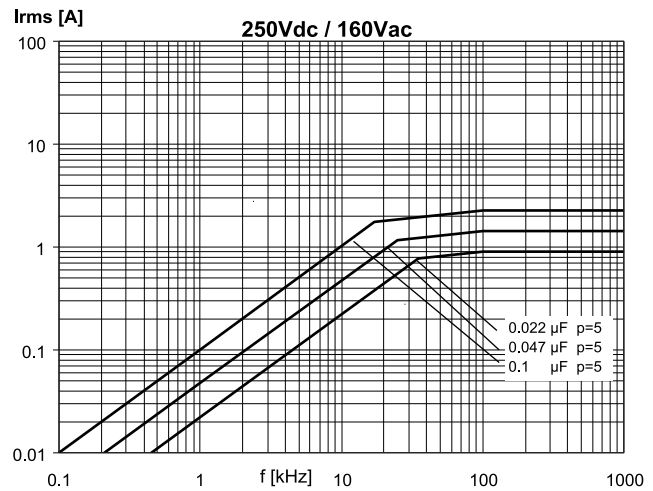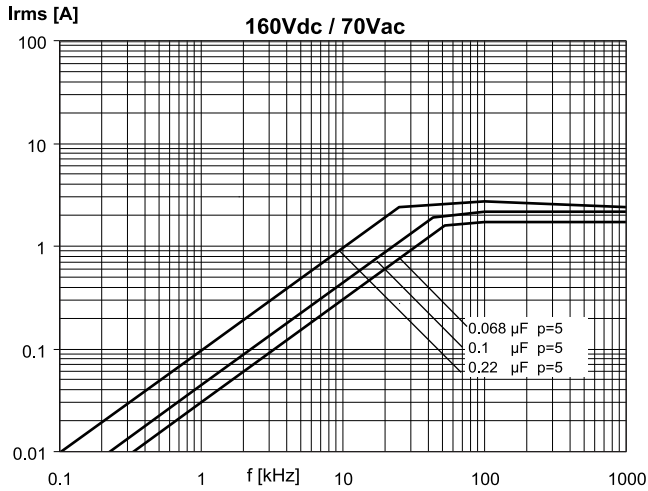

Note: p (pitch) in mm.

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute – and we specifically disclaim – any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.