

DO NOT SCALE FROM THIS PRINT

NOTES:

1. Ⓢ REPRESENTS A CRITICAL DIMENSION.
2. PARTS MAY BE CUT TO POSITION.
3. MAXIMUM CUT FLASH: .010 [0.25]
4. MINIMUM PUSHOUT FORCE: 1.0 LB.
5. MEASURED AT BEND RADIUS, NOT AT END OF PIN.
6. TUBE ONLY -04 THROUGH -50 POSITIONS (SEE TABLE 2).
7. SHEAR TAILS TO DIMENSION SHOWN.
8. MAXIMUM BURR ALLOWANCE: .003 [0.08]
9. GOLD PLATING TO BE ON POST, TIN PLATING TO BE ON TAIL.
10. FILL WITH ALIGNMENT PIN HOLES TO TAIL SIDE.
11. DUE TO THE HIGH AMOUNT OF INSERTION FORCE NEEDED, LOCKING CLIPS ARE NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH LOCKING CLIPS.
12. VOIDS MAY OR MAY NOT BE PRESENT ON POSITIONS 5 THRU 8 AND CAN BE MIXED WITHIN AN ORDER.
13. ON LEAD STYLES -01 THROUGH -04 THE T-1S15-03 CAN BE SUBSTITUTED FOR T-1S15-14.

FTSH-1XX-XX-XXX-DV-XXX

No OF POSITIONS  
-02 THRU -50  
(PER ROW)

LEAD STYLE

- 01: .120 [3.05]
- 02: .075 [1.91]
- 03: .065 [1.65]
- 04: .150 [3.81]
- 05: .170 [4.32]
- 14: .150 [3.81]

(NOT AVAILABLE WITH  
-SM, FM, LM PLATING OPTIONS)

PLATING SPECIFICATION




- L: 10μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- F: 3μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- S: 30μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- H: 30μ" GOLD IN CONTACT AREA, 3μ" GOLD ON TAIL
- LM: 10μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- FM: 3μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- SM: 30μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- LTL: 10μ" SELECTIVE GOLD IN CONTACT AREA, TIN/LEAD (90/10+/-5%) TAIL
- G: 10μ" GOLD IN CONTACT AREA, 3μ" GOLD ON TAIL

TAIL OPTION

- DV: DOUBLE VERTICAL
- (USE \*\*FTSH-1XX-XX-XXX-DV FOR ALL OPTIONS EXCEPT -ES, -EJ, -EJM, -EJC, -EC, -EP, -EL, -EPC, -A, THEN USE FTSH-50-D AND BUILD PER PRINT)  
\*\* = SEE FTSHC-1XX-XX-XXX-DX-XX PRINT FOR DETAILS

OPTIONS

- P: PICK & PLACE PAD (4 POS MIN) (SEE FIG 11, SHT 4 & TABLE 5)
  - TR: TAPE & REEL PACKAGING
  - ES: END SHROUDS (SEE FIG 6, SHT 3) (MOLDED IN 5 POS MIN; -02 & -03 LEAD STYLE ONLY) (SNAP SHROUDS 9 POS MIN; -02 & -03 LEAD STYLE ONLY) (MUST USE FTSH-50-D)
  - EJ: EJECTOR SHROUDS: SEE FIG 4, SHT 2) (10 POS MIN; -01 LEAD STYLE ONLY) (MUST USE FTSH-50-D)
  - EJM: EJECTOR SHROUDS WITH MOLDED ALIGNMENT PIN (SEE FIG 5, SHT 2; 10 POS MIN; -01 LEAD STYLE ONLY) (NOT VALID WITH -A OPTION) (MUST USE FTSH-50-D)
  - EJC: EJECTOR SHROUDS WITH LOCKING CLIP (SEE FIG 5, SHT 2 & NOTE 11) (10 POS MIN; -01 LEAD STYLE ONLY; NOT VALID WITH -A OPTION) (MUST USE FTSH-50-D)
  - EC: LOCKING CLIP (SEE FIG 7, SHT 3 & NOTE 11) (9 POS MIN; -02 & -03 LEAD STYLE ONLY) (MUST USE FTSH-50-D)
  - EP: GUIDE POST (SEE FIG 8, SHT 3; 9 POS MIN; -02 & -03 LEAD STYLE ONLY) (USE ONLY WHEN MATING WITH CLP) (MUST USE FTSH-50-D)
  - EL: BOARD LOCK (SEE FIG 9, SHT 3) (9 POS MIN; -02 & -03 LEAD STYLE ONLY) (USE ONLY WHEN MATING WITH CLP) (MUST USE FTSH-50-D)
  - EPC: GUIDE POST & LOCKING CLIP (SEE FIG 10, SHT 3 & NOTE 11; USE ONLY WHEN MATING WITH CLP) (9 POS MIN; -02 & -03 LEAD STYLE ONLY; NOT VALID WITH -A OPTION) (MUST USE FTSH-50-D)
  - A: ALIGNMENT PIN (MOLDED OR STAKED; SEE FIG 3, SHT 2) (MOLDED: 3 POS MIN; STAKED: 6 POS MIN) (SAMTEC DISCRETION ON WHICH -A PIN USED) (MUST USE FTSH-50-D)
  - K: KEYING OPTION FOR MATING WITH FFSD (SEE TABLE 3, SHT 2; 05 THRU 25 AVAILABLE AS STANDARD) (POSITION 13, 17, 20 & 25 AVAILABLE WITH -EJ OPTION) (LEAD STYLE -01 ONLY, SEE FIG 2, SHT 2 & NOTE 12) (ALIGNMENT PIN AVAILABLE WITH -K OPTION BUT MUST BE MOLDED) (MUST USE FTSH-XX-CN-XX)
  - \*-M: METAL PICK & PLACE PAD (5 POS MIN; USE MPP-22-5) (SEE FIG 12, SHT 4; NOT AVAILABLE WITH -K OPTION)
- \* = NOT ENGINEERING APPROVED

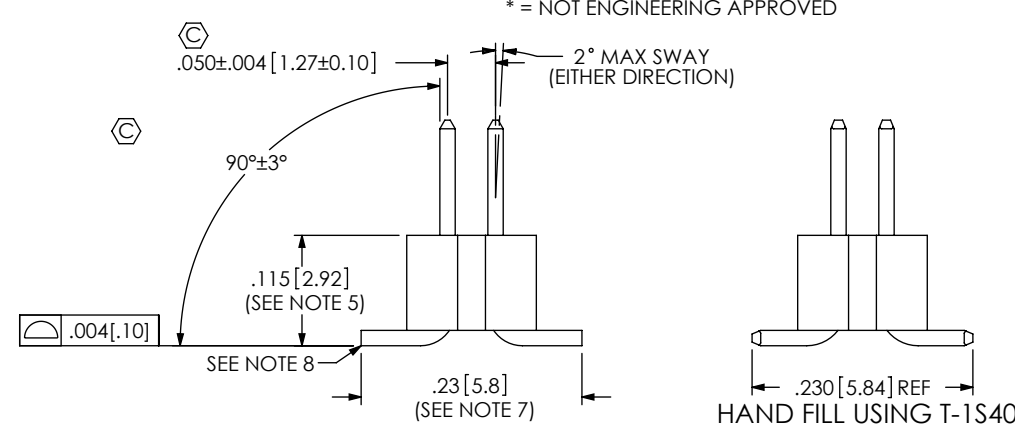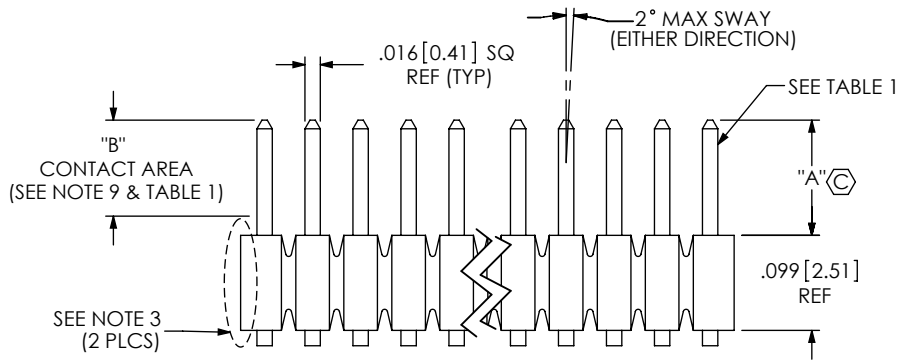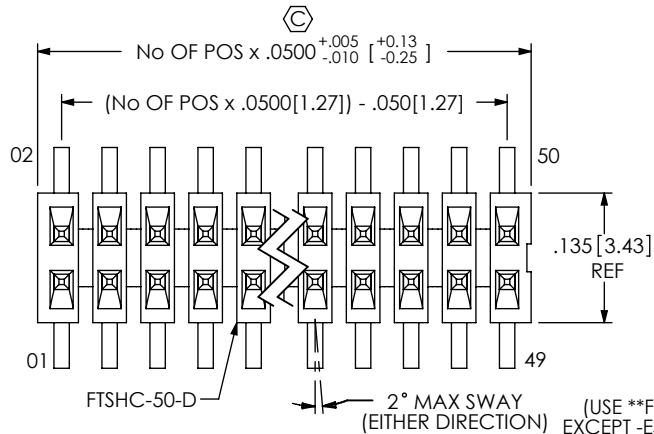


PATENT NUMBERS  
5713755 / 5961339

FIG 1  
FTSH-1XX-XX-XXX-DV SHOWN  
(SEE FTSHC-1XX-XX-XXX-DX-XX PRINT FOR DETAILS)

| TABLE 1    |             |             |                 |                 |                |
|------------|-------------|-------------|-----------------|-----------------|----------------|
| LEAD STYLE | "A"         | "B" REF     | AUTOMATED BKT   | HAND FILL       | MICRO HEADER   |
| -01        | .120 [3.05] | .070 [1.78] | * T-1S15-14-XXX | T-1S40-03-XX-2  | T-1S40-03-XX-3 |
| -02        | .075 [1.91] | .070 [1.78] | * T-1S15-14-XXX | * T-1S15-14-XXX | NOT AVAILABLE  |
| -03        | .065 [1.65] | .070 [1.78] | * T-1S15-14-XXX | * T-1S15-14-XXX | NOT AVAILABLE  |
| -04        | .150 [3.81] | .070 [1.78] | * T-1S15-14-XXX | * T-1S15-14-XXX | NOT AVAILABLE  |
| -05        | .170 [4.32] | .070 [1.78] | T-1S15-03-XXX   | T-1S15-03-XXX   | NOT AVAILABLE  |
| * -14      | .150 [3.81] | .135 [3.43] | T-1S15-63-XXX   | T-1S15-63-XXX   | NOT AVAILABLE  |

\* = SEE NOTE 13

|  |  |   |  |
|--|--|---|--|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE:<br>DECIMALS ANGLES<br>.XX: ±.01 [.3] 1°<br>.XXX: ±.005 [.13]<br>.XXXX: ±.0010 [.025] | PROPRIETARY NOTE<br>THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC. |                                    |  |
|  |  | 520 PARK EAST BLVD, NEW ALBANY, IN 47150<br>PHONE: 812-944-6733 FAX: 812-948-5047<br>e-Mail: info@SAMTEC.com code 53322 |  |
| MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 5:1<br>INSULATOR: LCP UL 94 VO<br>TERMINAL: PHOSPHOR BRONZE  |  | DESCRIPTION:<br>.050 x .050 CL DOUBLE VERTICAL SMT TERMINAL STRIP   |  |
| DWG. NO.<br><b>FTSH-1XX-XX-XXX-DV-XXX</b>  |  | BY: PURVIS 10/12/1995 SHEET 1 OF 5  |  |

F:\DWG\MISC\MKTG\FTSH-1XX-XX-XXX-DV-XXX-MKT.SLDDRW

REVISION EN

FIG 2


-K OPTION

(LEAD STYLE -01 ONLY)

(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

(POSITION 13, 17, 20 & 25 AVAILABLE WITH

-EJ OPTION)

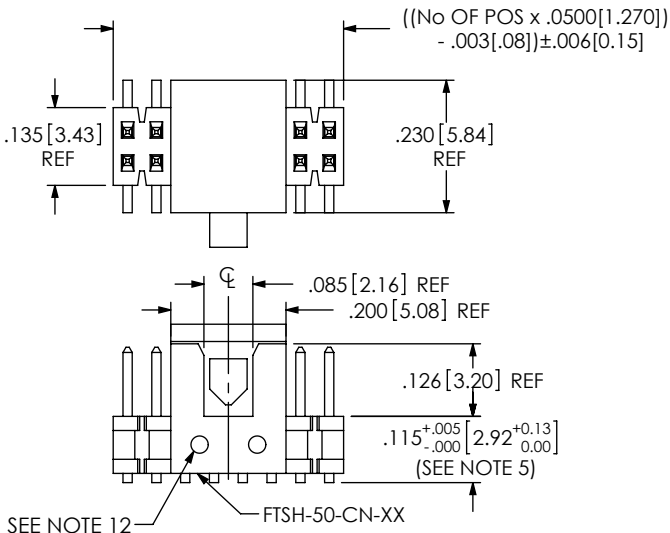

SEE NOTE 12 FTSH-50-CN-XX

| TABLE 3   |               |                            |
|-----------|---------------|----------------------------|
| No OF POS | BODY          | No OF PARTS PER FULL STRIP |
| -05       | FTSH-50-CN-05 | 10                         |
| -06       | FTSH-50-CN-06 | 8                          |
| -07       | FTSH-50-CN-07 | 7                          |
| -08       | FTSH-50-CN-08 | 6                          |
| -09       | FTSH-50-CN-09 | 5                          |
| -10       | FTSH-50-CN-10 | 5                          |
| -11       | FTSH-50-CN-11 | 4                          |
| -12       | FTSH-50-CN-12 | 4                          |
| -13       | FTSH-50-CN-13 | 3                          |
| -14       | FTSH-50-CN-14 | 3                          |
| -15       | FTSH-50-CN-15 | 3                          |
| -16       | FTSH-50-CN-16 | 3                          |
| -17       | FTSH-50-CN-17 | 2                          |
| -18       | FTSH-50-CN-18 | 2                          |
| -19       | FTSH-50-CN-19 | 2                          |
| -20       | FTSH-50-CN-20 | 2                          |
| -21       | FTSH-50-CN-21 | 2                          |
| -22       | FTSH-50-CN-22 | 2                          |
| -23       | FTSH-50-CN-23 | 2                          |
| -24       | FTSH-50-CN-24 | 2                          |
| -25       | FTSH-50-CN-25 | 2                          |

FIG 4

SCALE 2 : 1

-EJ OPTION

(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

(-01 LEAD STYLE ONLY)


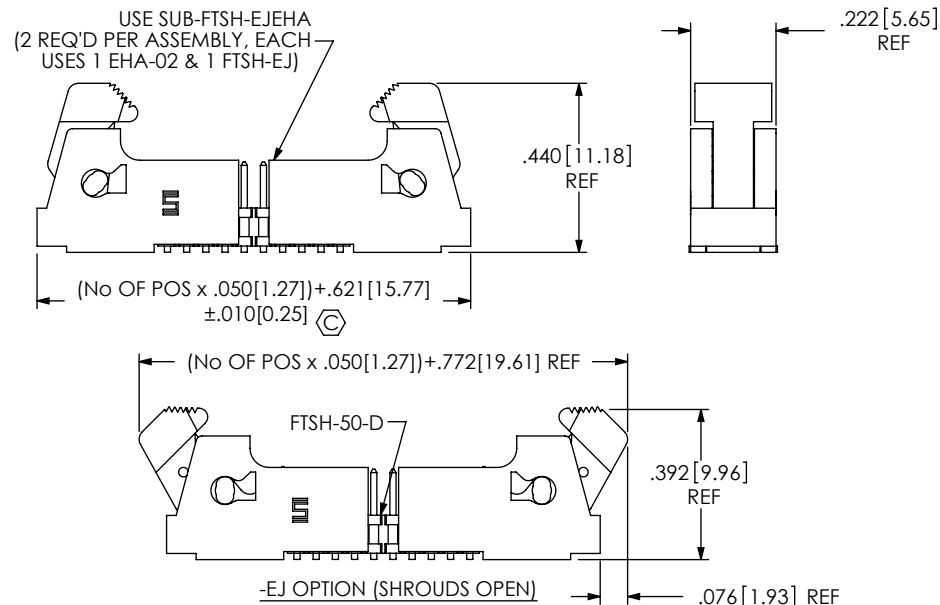


FIG 3


-A OPTION

(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

(6 POSITION MINIMUM FOR STAKED ALIGNMENT PINS)  
(3 POSITION MINIMUM FOR MOLDED ALIGNMENT PINS)

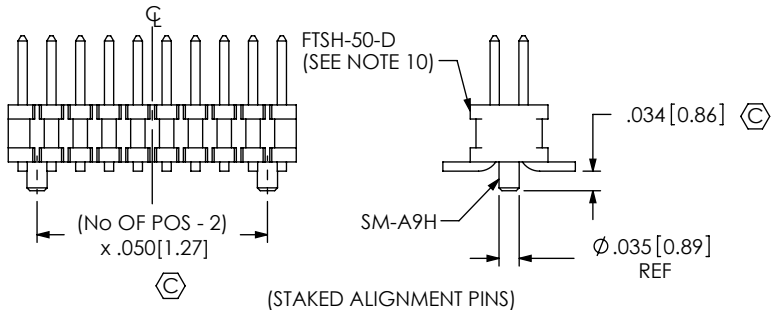

(STAKED ALIGNMENT PINS)

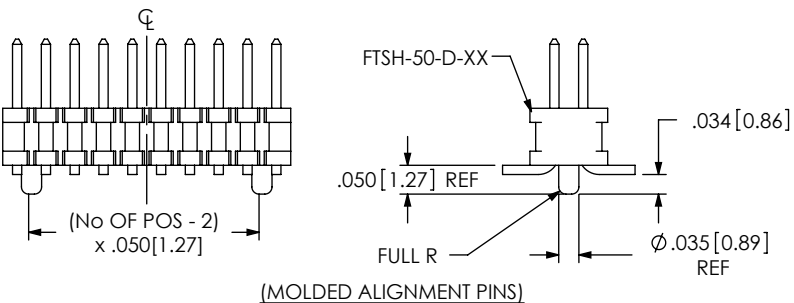

(MOLDED ALIGNMENT PINS)

F:\DWG\MISC\MKTG\FTSH-1XX-XX-XXX-DV-XXX-MKT.SLDDRW


FIG 5

SCALE 2 : 1

-EJC & -EJM OPTIONS

(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 4)

(-01 LEAD STYLE ONLY)

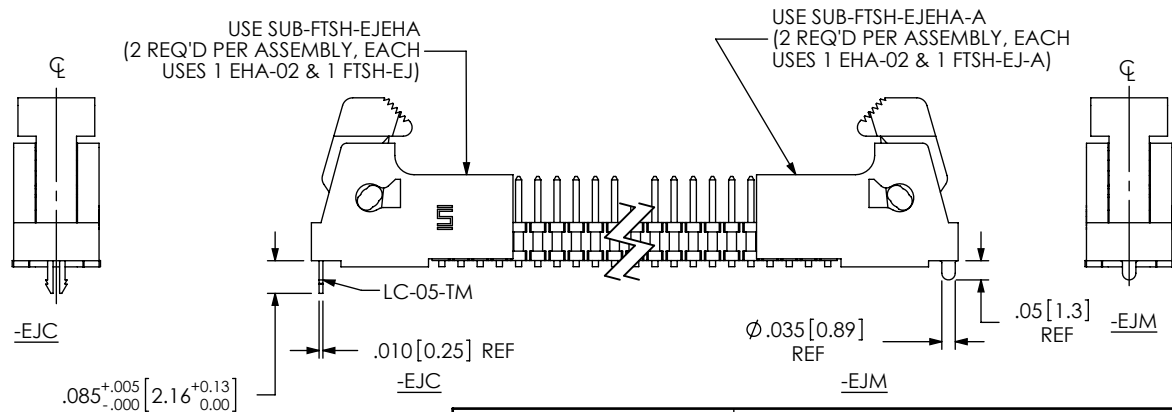

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:1

**samtec**



520 PARK EAST BLVD, NEW ALBANY, IN 47150  
PHONE: 812-944-6733 FAX: 812-948-5047  
e-Mail: info@SAMTEC.com code 53322

DESCRIPTION:  
...050 x .050 CL DOUBLE VERTICAL SMT TERMINAL STRIP



DWG. NO.  
**FTSH-1XX-XX-XXX-DV-XXX**

BY: PURVIS 10/12/1995 SHEET 2 OF 5

**FIG 6**  
-ES OPTION  
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)  
(USE -02 OR -03 LEAD STYLE ONLY)  
(9 POS MIN FOR SNAP SHROUDS)  
(5 POS MIN FOR MOLDED SHROUDS)

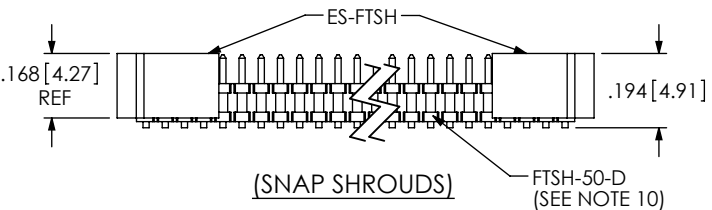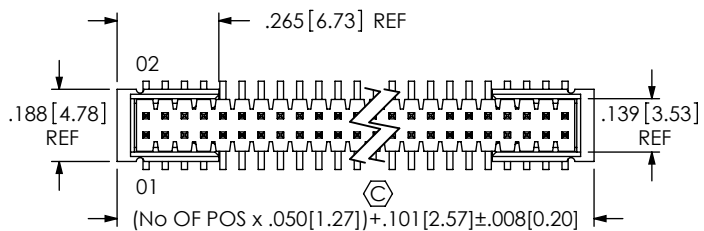


(SNAP SHROUDS)

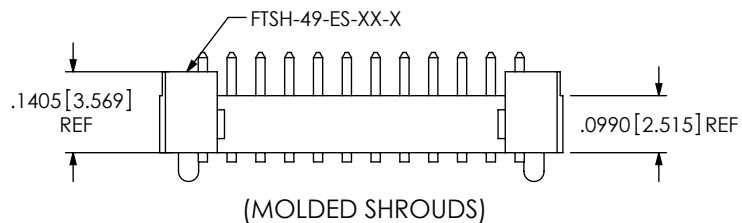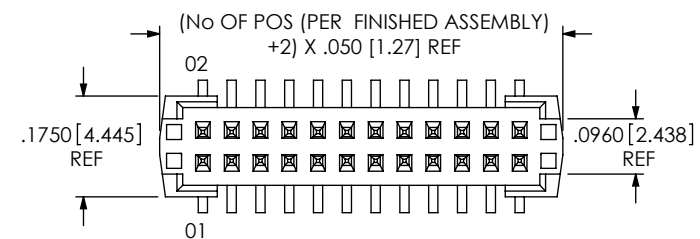


(MOLDED SHROUDS)

**FIG 7**  
-EC OPTION  
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 6)

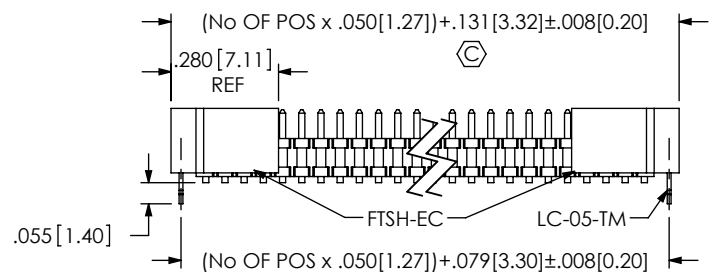


F:\DWG\MISC\MKTG\FTSH-1XX-XX-XXX-DV-XXX-MKT.SLDDRW


**FIG 8**  
-EP OPTION  
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 6)  
(USE ONLY WHEN MATING WITH CLP)

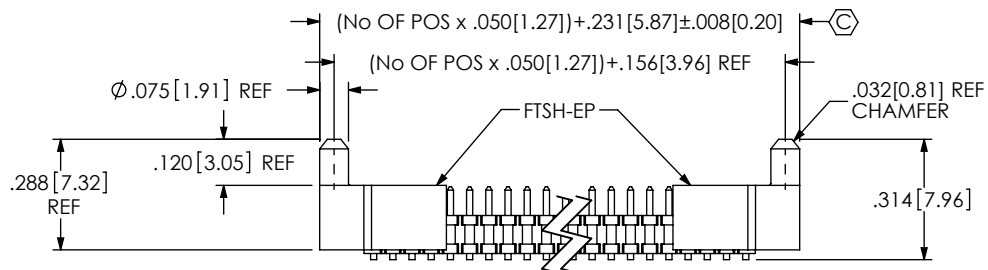

**FIG 9**  
-EL OPTION  
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 6)  
(USE ONLY WHEN MATING WITH CLP)

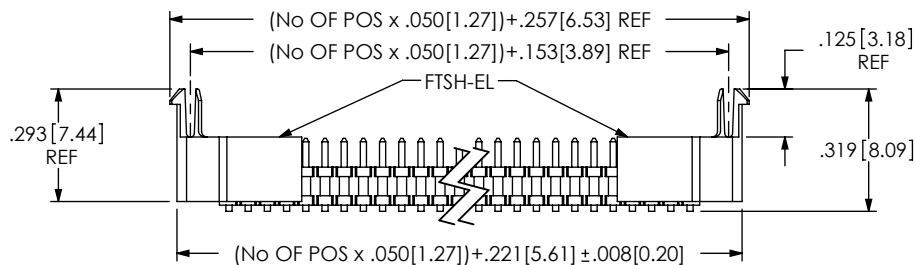

**FIG 10**  
-EPC OPTION  
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 6)  
(USE ONLY WHEN MATING WITH CLP)

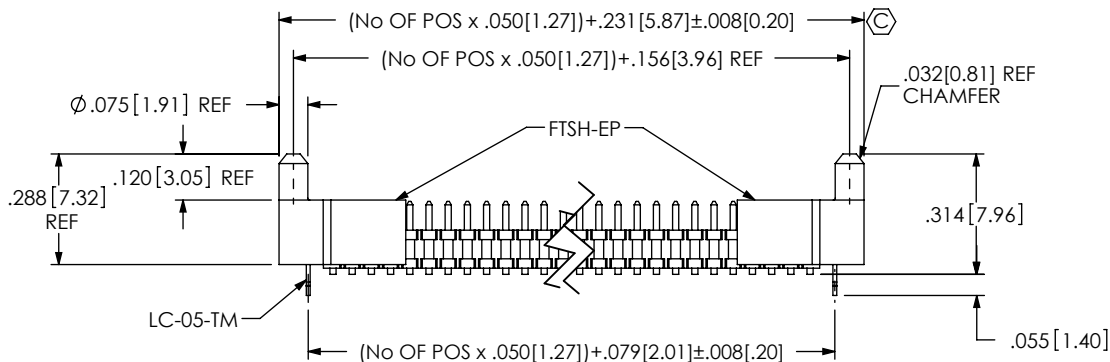

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2:1




520 PARK EAST BLVD, NEW ALBANY, IN 47150  
PHONE: 812-944-6733 FAX: 812-948-5047  
e-Mail info@SAMTEC.com code 53322

DESCRIPTION:  
.050 x .050 CL DOUBLE VERTICAL SMT TERMINAL STRIP

DWG. NO.  
**FTSH-1XX-XX-XXX-DV-XXX**

BY: PURVIS 10/12/1995 SHEET 3 OF 5

REVISION EN

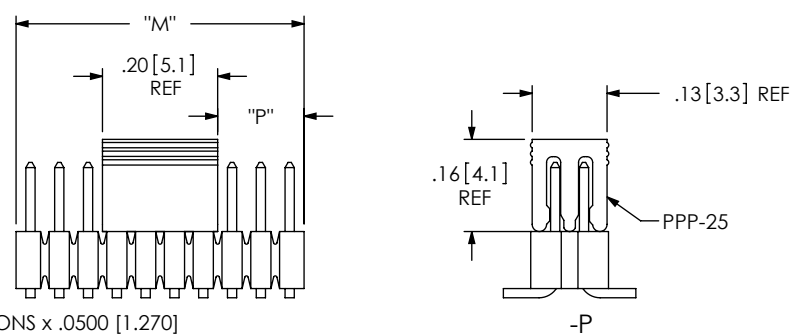


"M" = No OF POSITIONS x .0500 [1.270]  
 "P" = {("M" -.200 [508]) / 2} ±.020 [.51]


FIG 11  
 -P OPTION  
 (DIFFERENT AS SHOWN,  
 OTHERWISE SAME AS FIG 1)

| TABLE 5            |           |          |
|--------------------|-----------|----------|
| OPTION(S)          | PAD       | MIN. POS |
| NONE, -A           | PPP-25**  | 4        |
| -EJ, -EJC, -EJM    | PPP-41    | 10       |
| -ES, -EC, -EP, -EL | PPP-25**  | 9        |
| -EPC               | PPP-25**  | 5*       |
| -K                 | PPP-25-KT | 5        |
| -K-EJ              | PPP-25-KT | 10       |

\*MOLDED SHROUD ONLY  
 \*\* USE PPP-25-NT WITH -TR  
 PACKAGING ONLY

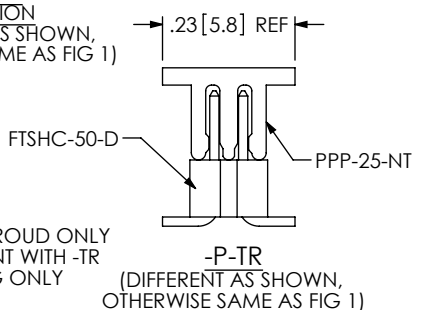


-P-TR  
 (DIFFERENT AS SHOWN,  
 OTHERWISE SAME AS FIG 1)

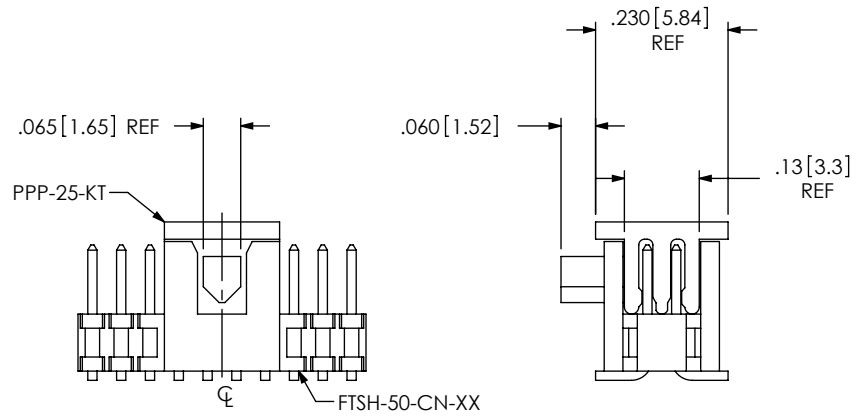


-K-P-TR  
 (DIFFERENT AS SHOWN,  
 OTHERWISE SAME AS FIG 2)

NOTE: TAPE & REEL ORIENTATION:  
 POLARIZATION NOTCH TO THE RIGHT

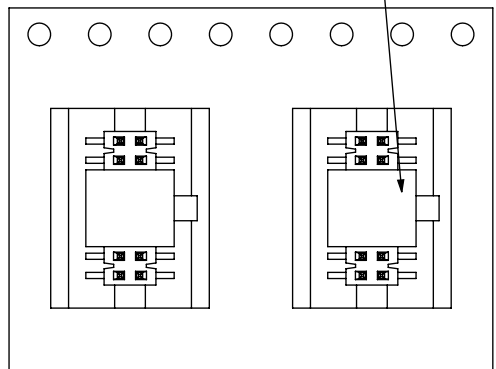


TAPE & REEL VIEW  
 USER DIRECTION OF UN-REELING →  
 POCKET NOT DETAILED

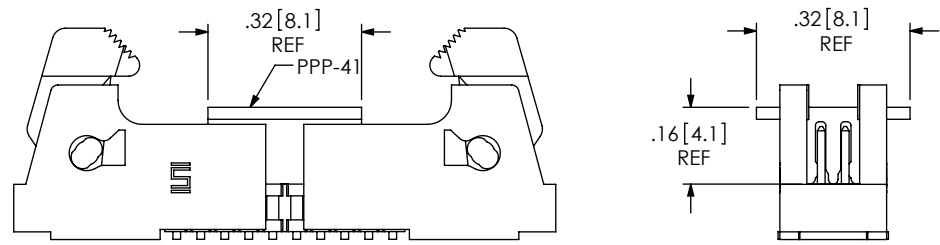

-EJ-P & -EJX -P  
 (DIFFERENT AS SHOWN,  
 OTHERWISE SAME AS FIGS 4 & 5)

FIG 12  
 \*-M: METAL PICK & PLACE PAD  
 (DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)  
 (NOT AVAILABLE WITH -K OPTION)(5 POS MIN)  
 \* = NOT ENGINEERING APPROVED

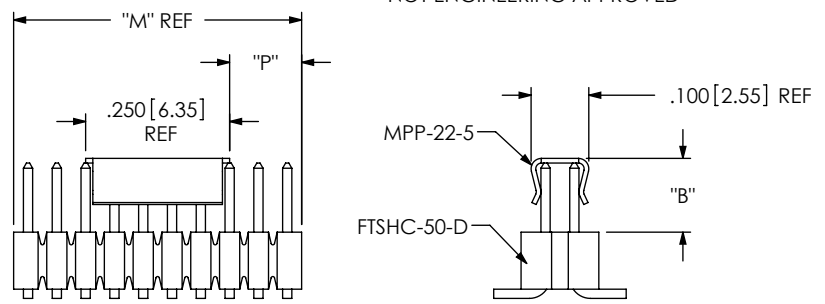

"M" = No OF POSITIONS x .0500 [1.270]  
 "P" = {("M" -.250 [6.35]) / 2} ± .020 [0.51]

| TABLE 4    |             |
|------------|-------------|
| LEAD STYLE | "B" REF     |
| -01        | .125 [3.18] |
| -02        | .080 [2.03] |
| -03        | .070 [1.78] |
| -04        | .155 [3.94] |
| -14        | .155 [3.94] |

PROPRIETARY NOTE  
 THIS DOCUMENT CONTAINS INFORMATION  
 CONFIDENTIAL AND PROPRIETARY TO  
 SAMTEC, INC. AND SHALL NOT BE REPRODUCED  
 OR TRANSFERRED TO OTHER DOCUMENTS OR  
 DISCLOSED TO OTHERS OR USED FOR ANY  
 PURPOSE OTHER THAN THAT WHICH IT WAS  
 OBTAINED WITHOUT THE EXPRESSED WRITTEN  
 CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING  
 SHEET SCALE: 3:1




520 PARK EAST BLVD, NEW ALBANY, IN 47150  
 PHONE: 812-944-6733 FAX: 812-948-5047  
 e-Mail info@SAMTEC.com code 53322

DESCRIPTION:  
 .050 x .050 CL DOUBLE VERTICAL SMT TERMINAL STRIP


DWG. NO.  
**FTSH-1XX-XX-XXX-DV-XXX**

BY: PURVIS 10/12/1995 SHEET 4 OF 5

FIG 13  
TUBE VIEWS

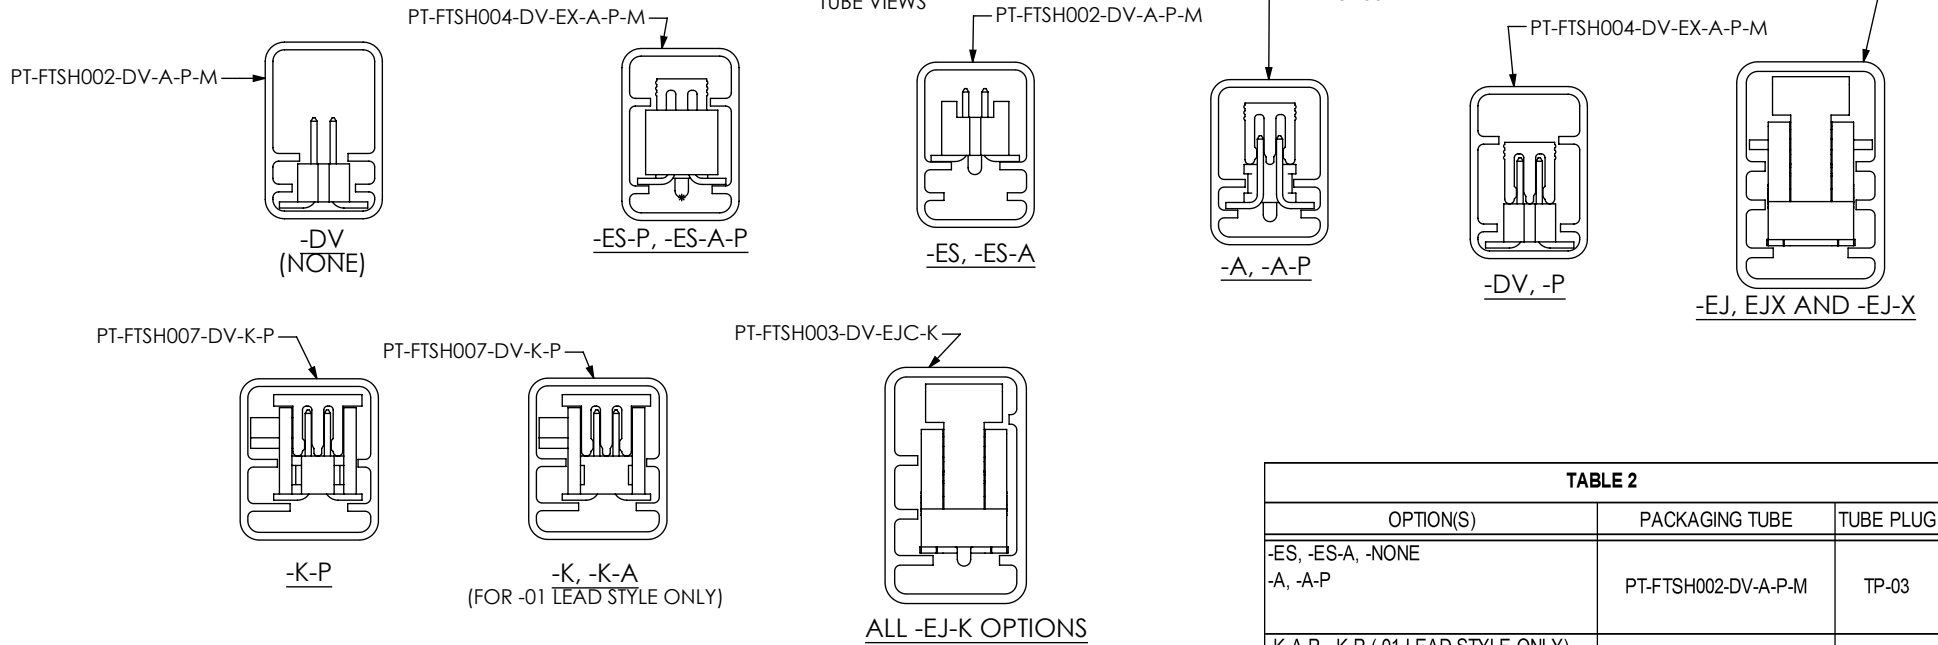

| TABLE 2   |                        |           |
|---|------------------------|-----------|
| OPTION(S)   | PACKAGING TUBE         | TUBE PLUG |
| -ES, -ES-A, -NONE<br>-A, -A-P   | PT-FTSH002-DV-A-P-M    | TP-03     |
| -K-A-P, -K-P (-01 LEAD STYLE ONLY)<br>-K-P (-04 LEAD STYLE ONLY)<br>-K, -K-A (FOR -01 LEAD STYLE ONLY)                                  | PT-FTSH007-DV-K-P      | TP-09     |
| -ES-P, -ES-A-P<br>-EC, -EC-P, -EL-P<br>-EP, -EP-A, EP-P, -EP-A-P<br>-EPC, -EPC-D, -EPC-P<br>-EL, -EL-A, -EL-A-P<br>-P (ALL LEAD STYLES) | PT-FTSH004-DV-EX-A-P-M | TP-03     |
| -EJ-K, -EJ-K-P<br>-EJ-K-A, -EJ-K-A-P  | PT-FTSH003-DV-EJC-K    | TP-03     |
| -EJ, -EJ-P, -EJ-A-P, -EJ-A, -EJM, -EJC  | PT-FTSH006-DV-EJC-K-P  | TP-03     |

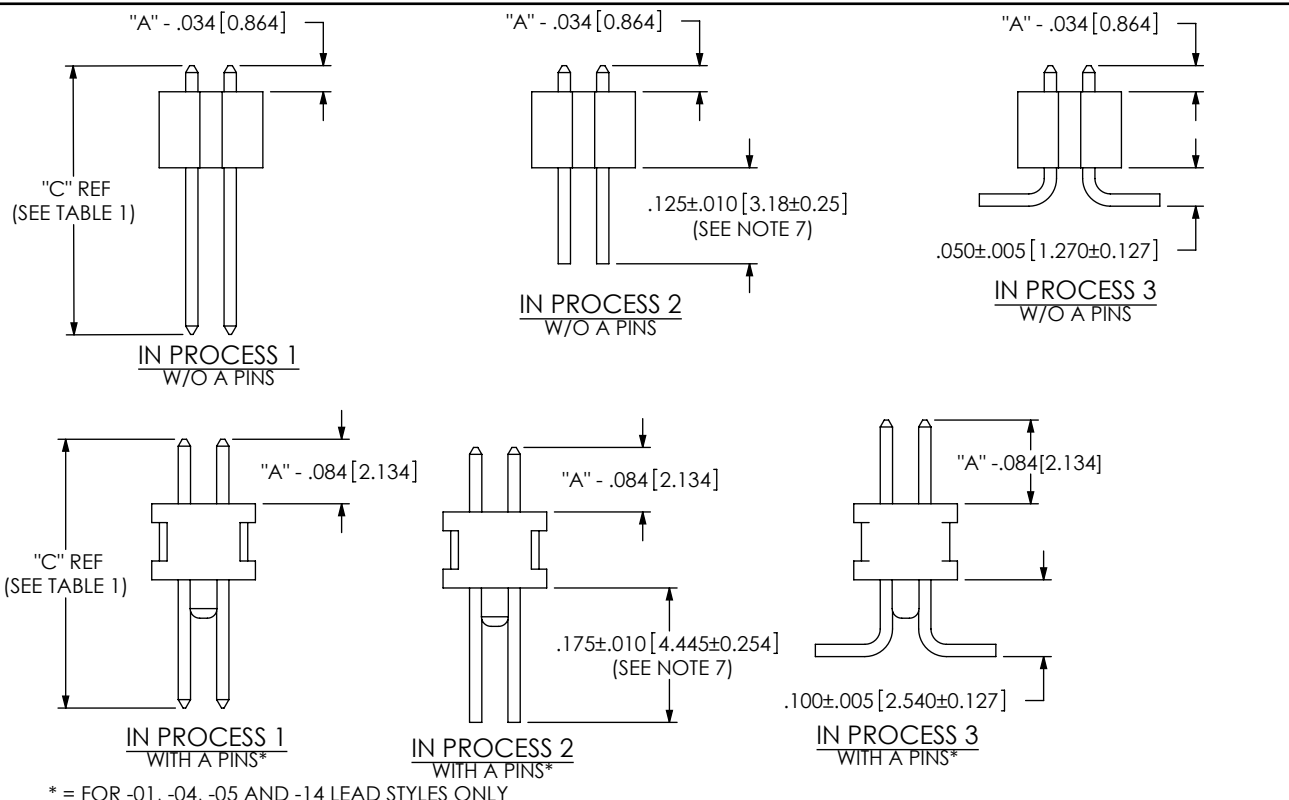

IN-PROCESS VIEWS ARE FOR HANDFILL ONLY

**PROPRIETARY NOTE**  
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.



520 PARK EAST BLVD, NEW ALBANY, IN 47150  
PHONE: 812-944-6733 FAX: 812-948-5047  
e-Mail info@SAMTEC.com code 53322

DO NOT SCALE DRAWING  
SHEET SCALE: 2:1

DESCRIPTION:  
.050 x .050 CL DOUBLE VERTICAL SMT TERMINAL STRIP  
DWG. NO.  
**FTSH-1XX-XX-XXX-DV-XXX**  
BY: PURVIS 10/12/1995 SHEET 5 OF 5



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.