

LOC	DIST	REVISIONS				
AD	00	P	LTR	DESCRIPTION	DATE	APVD
			A4	REVISED PER ECO-11-016911	18NOV11	KH MW

SPECIFICATIONS:

MATERIALS:
CASE, PPS, UL94 V-0, BROWN
ACTUATOR, NYLON, UL94V-0, SEE P/N TABLE FOR FINISH
COVER, STEEL, TIN FINISH
TERMINAL/FIXED CONTACT, COPPER ALLOY-SILVER FINISH
MOVING CONTACT, STAINLESS STEEL-SILVER FINISH




ELECTRICAL:
MAX CONTACT RATING, 50MILLIAMP@24V DC
MIN CONTACT RATING, 1MICROAMP@1V DC
CONTACT RESISTANCE, 100 MILLIOHMS MAX
INSULATION RESISTANCE, 100 MEGOHM MIN.
DIELECTRIC STRENGTH, 500 V AC FOR 1 MINUTE
LIFE EXPECTANCY, 1,000,000 CYCLES

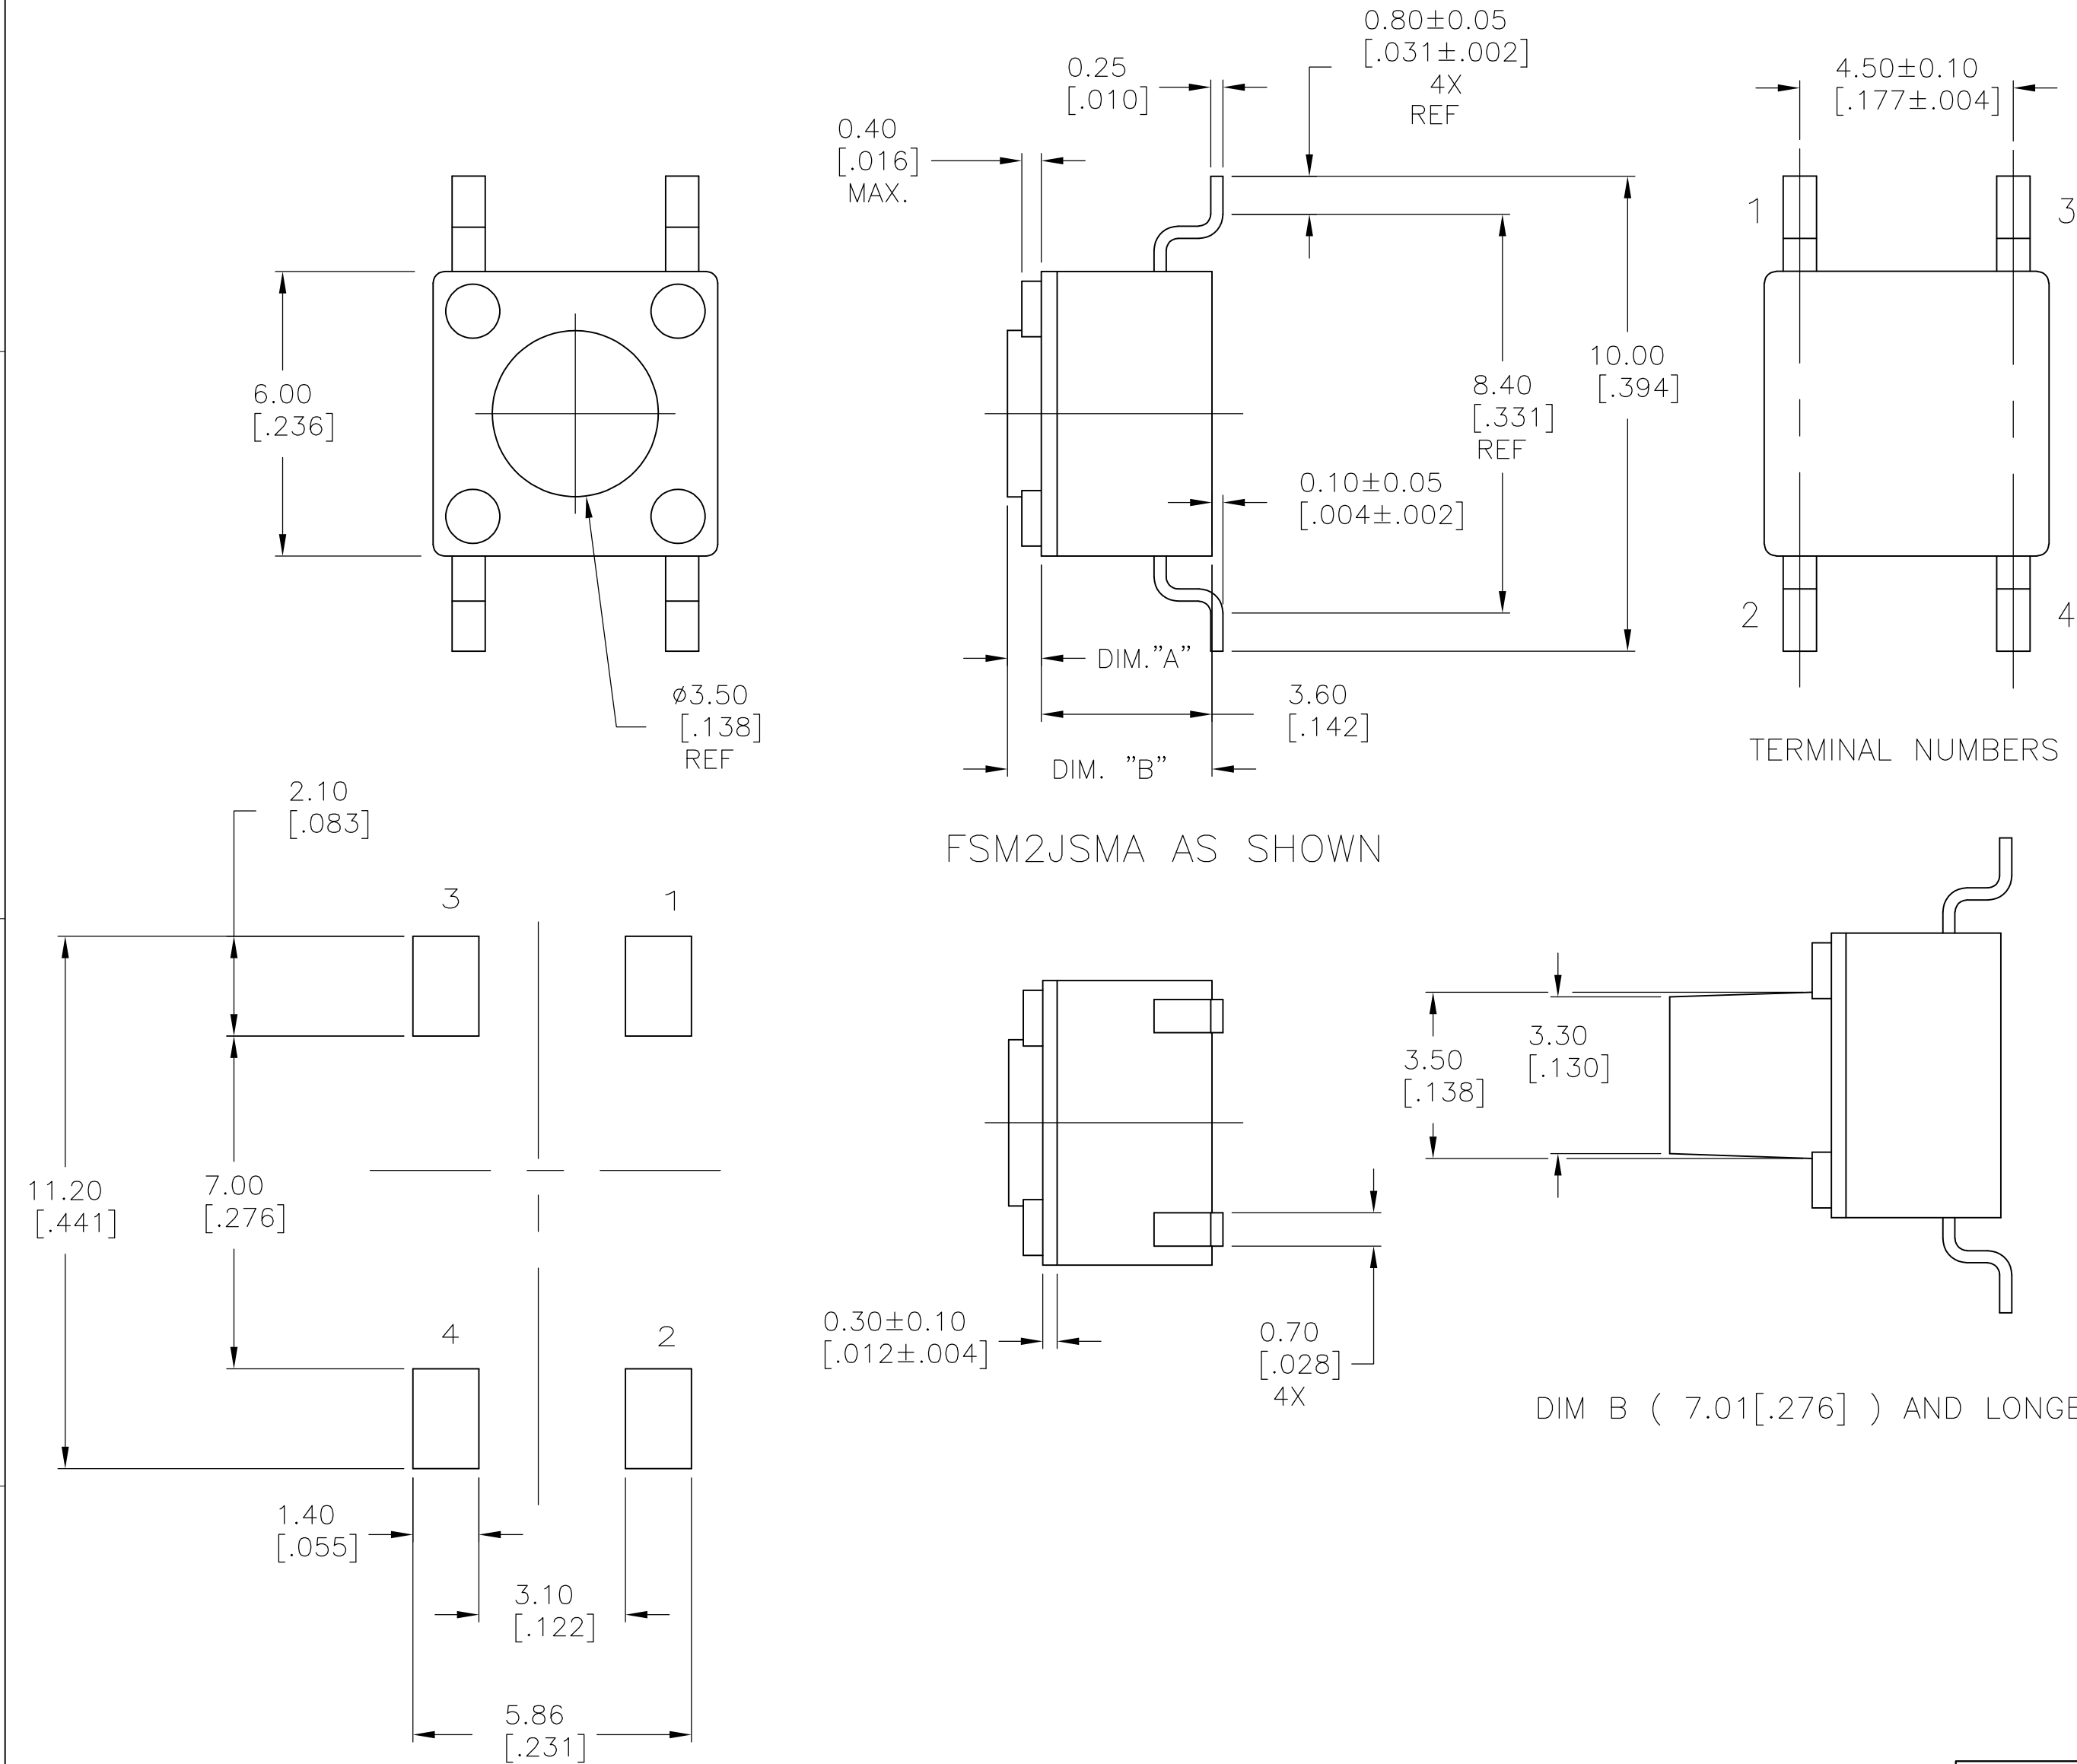
MECHANICAL:
ACTUATION FORCE, SEE P/N TABLE
ACTUATION TRAVEL, 0.25 +0.20/-0.10
LIFE EXPECTANCY, 1,000,000,
(2 CYCLES PER SECOND AND 150% ACTUATION FORCE)

ENVIRONMENTAL:
OPERATING TEMPERATURE, -40 TO +105° C
STORAGE TEMPERATURE, -40 TO +105° C
SOLDERABILITY, EIA-RS-186-9E, OR MIL-STD-202F
RESISTANCE TO SOLDER HEAT, 260° C FOR 10SEC-PER 109-201, COND B
1. NO CHANGE IN INITIAL ELECTRICAL AND MECHANICAL CHARACTERISTICS

NOTES:

- 1 TAPE AND REEL PACKAGING PER EIA 481.
- 2 ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

()-INDICATES MOMENTARY POSITION		
CIRCUIT CHARACTERISTICS		
CONTACT POSITION	CIRCUIT DIAGRAM	
		
OFF	(ON) 1 - 3 2 - 4	



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER 07NOV2007	 TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK M.SARVER 07NOV07				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M.SARVER 07NOV07	NAME			
0 PLC ± - 1 PLC ± - 2 PLC ± 0.30[.012] 3 PLC ± - 4 PLC ± - ANGLES ± 1°		PRODUCT SPEC	MICRO MINIATURE PUSHBUTTON SWITCH FSM JSM			
MATERIAL		FINISH	SIZE A2	CAGE CODE 00779	DRAWING NO C=1977223	RESTRICTED TO -
			WEIGHT -	SCALE 8:1	SHEET 1 OF 2	REV A4
			CUSTOMER DRAWING			

4		3		2		1															
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		2-1437565-7 2-1437565-7		LOC		DIST		REVISIONS											
© COPYRIGHT 2-1437565-7		ALL RIGHTS RESERVED.				AD		00		P	LTR	DESCRIPTION			DATE	DWN	APVD				
											-	SEE SHEET 1			-	-	-				



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.