
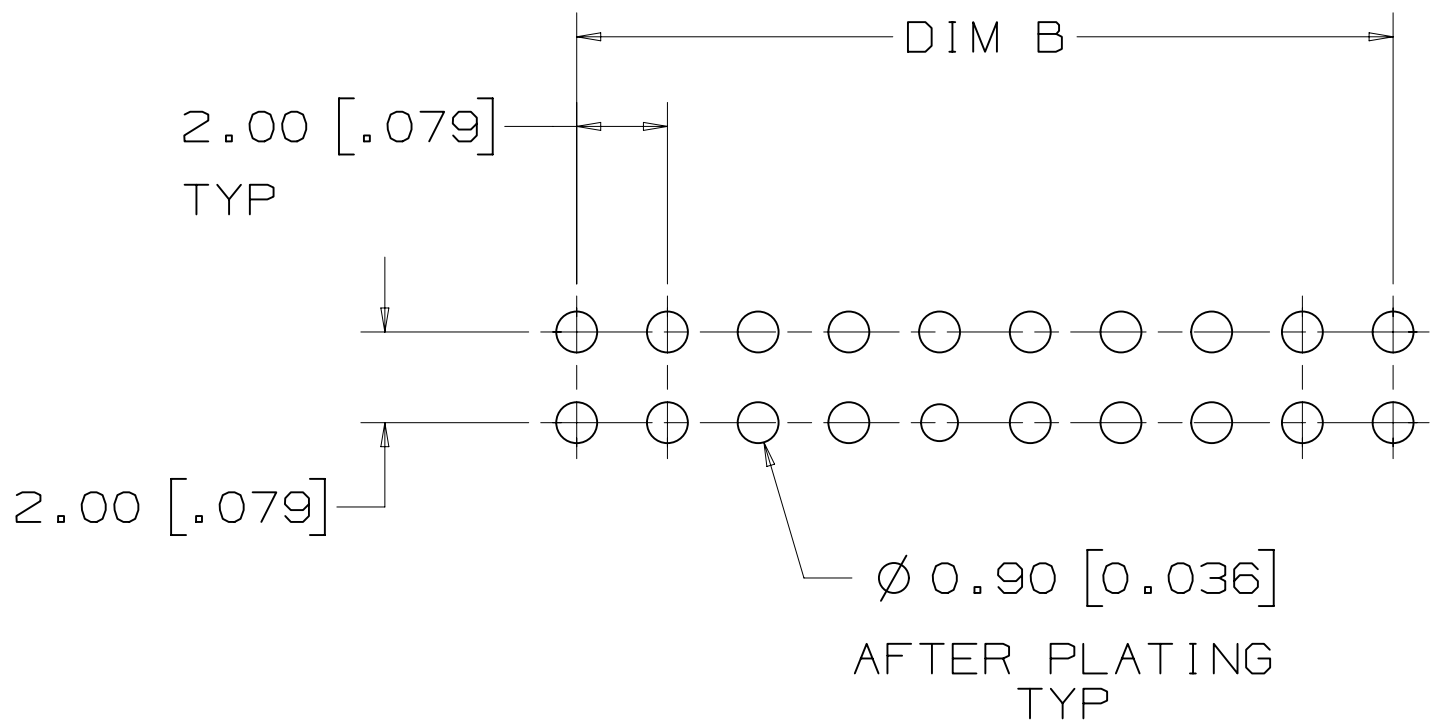
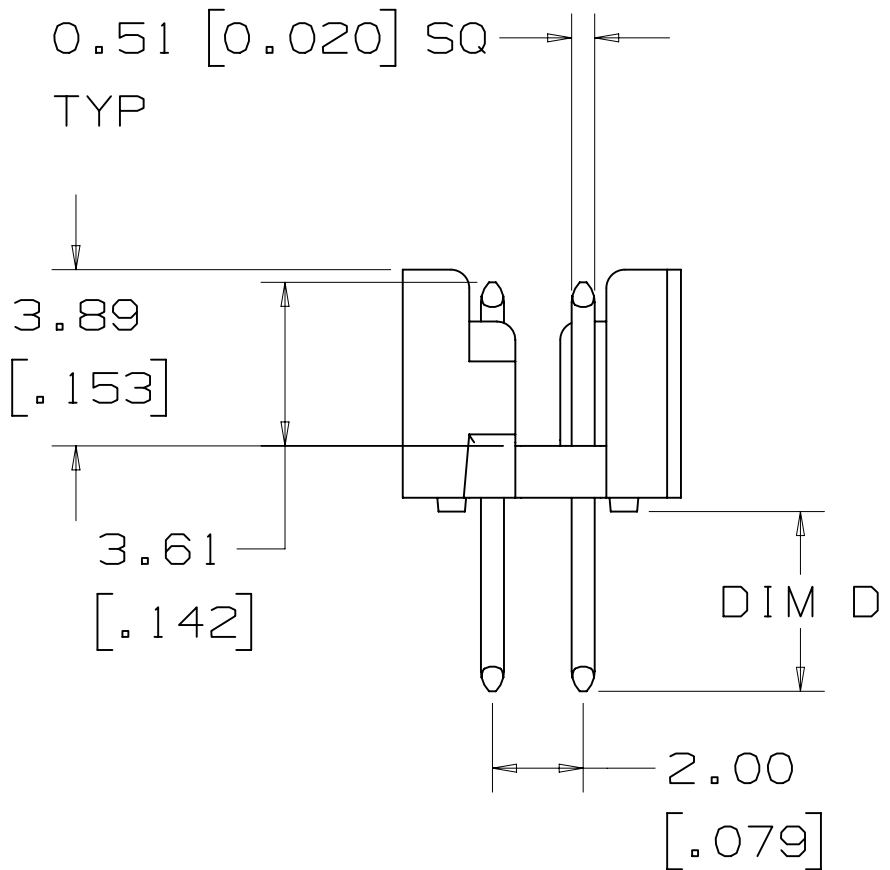
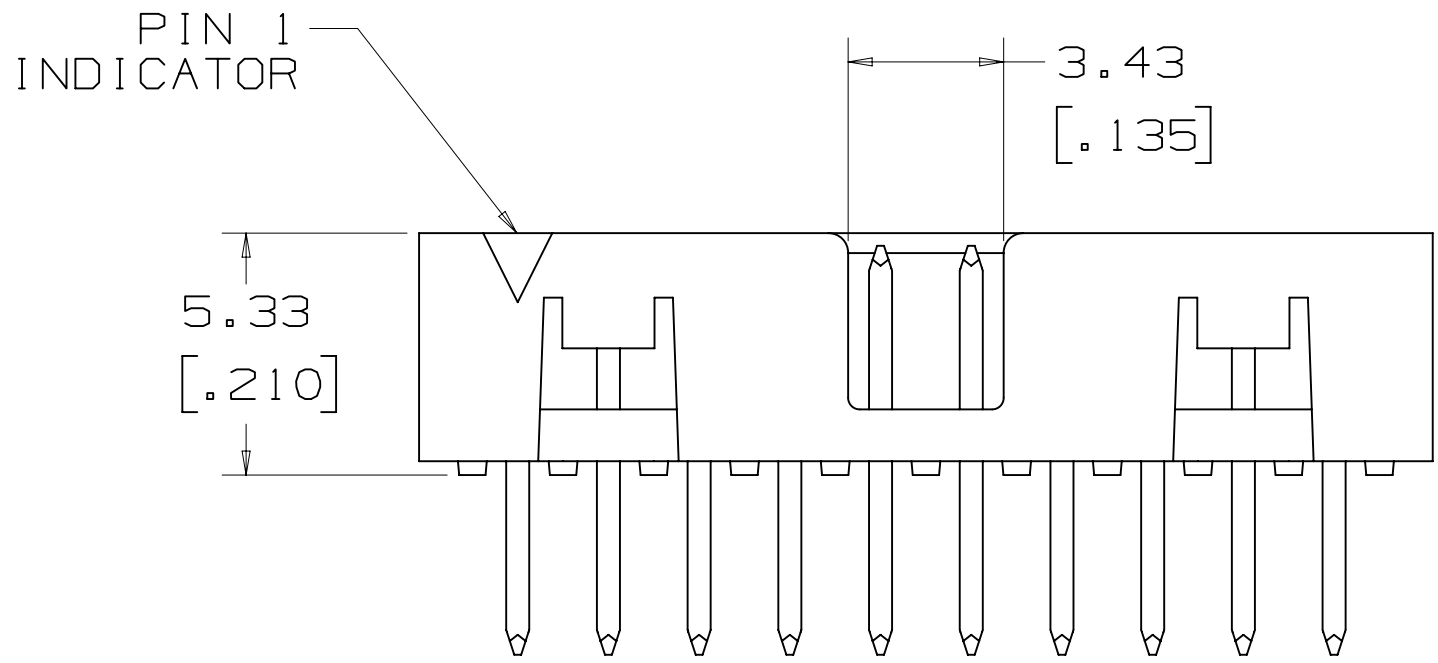
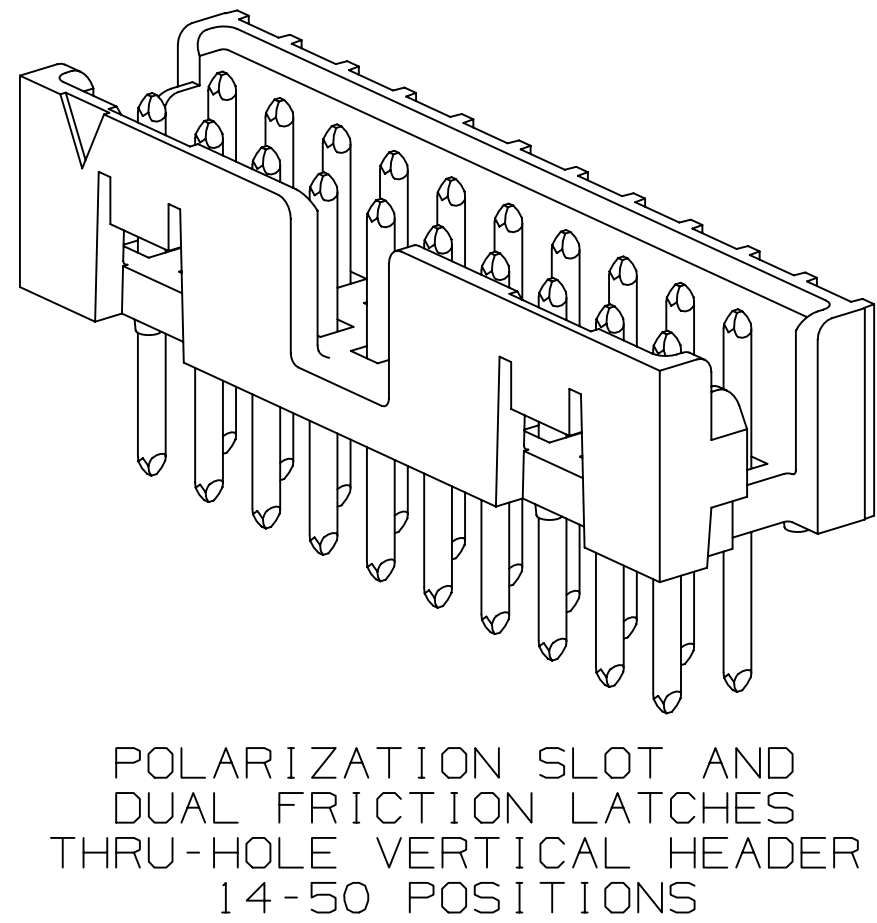
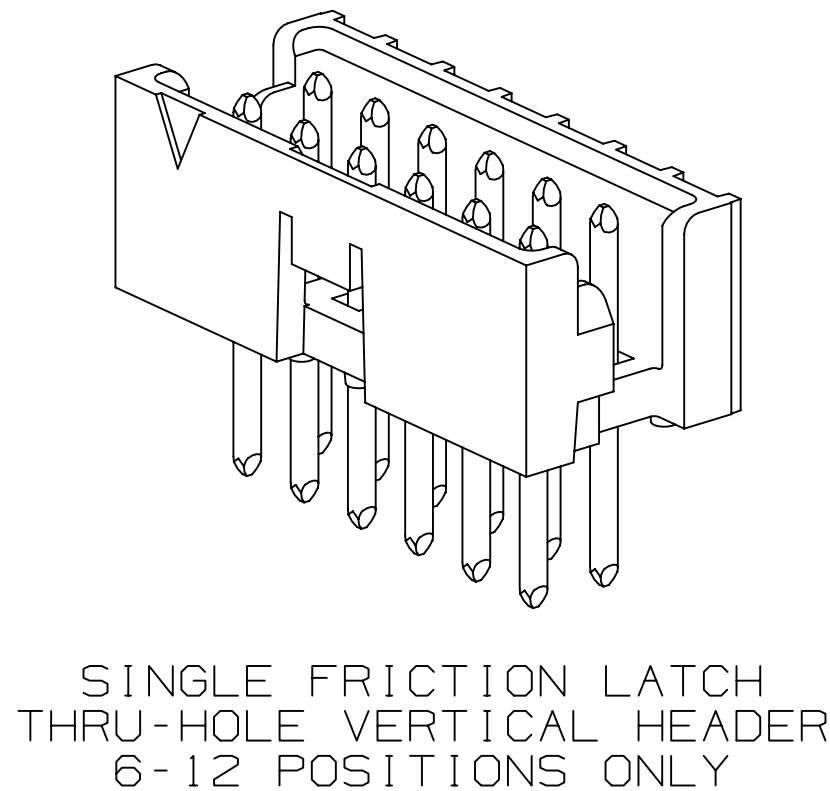
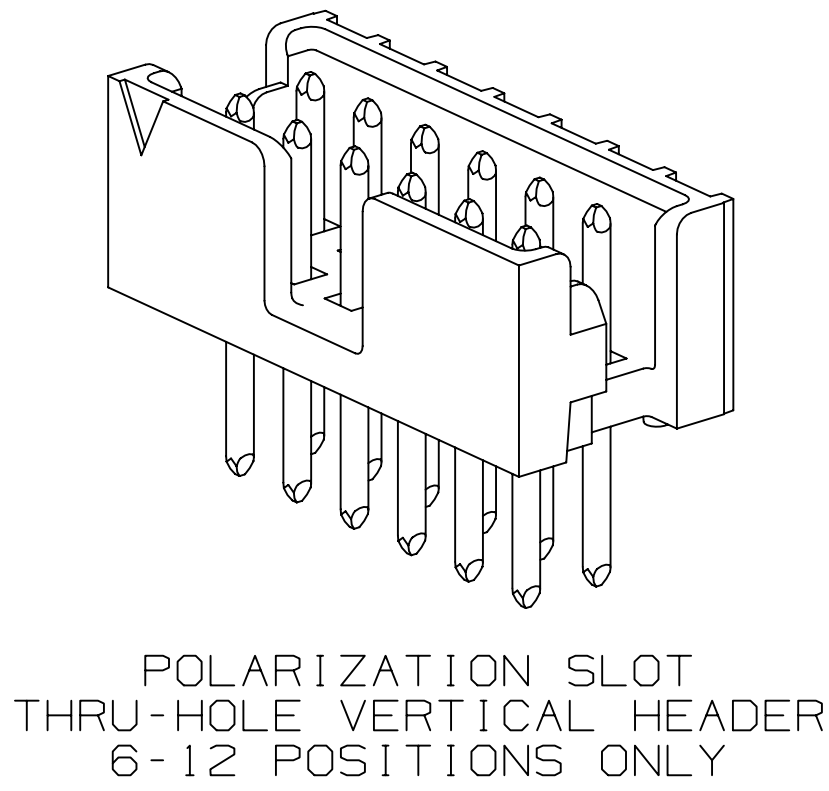


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length [3] and Extended Length [4]

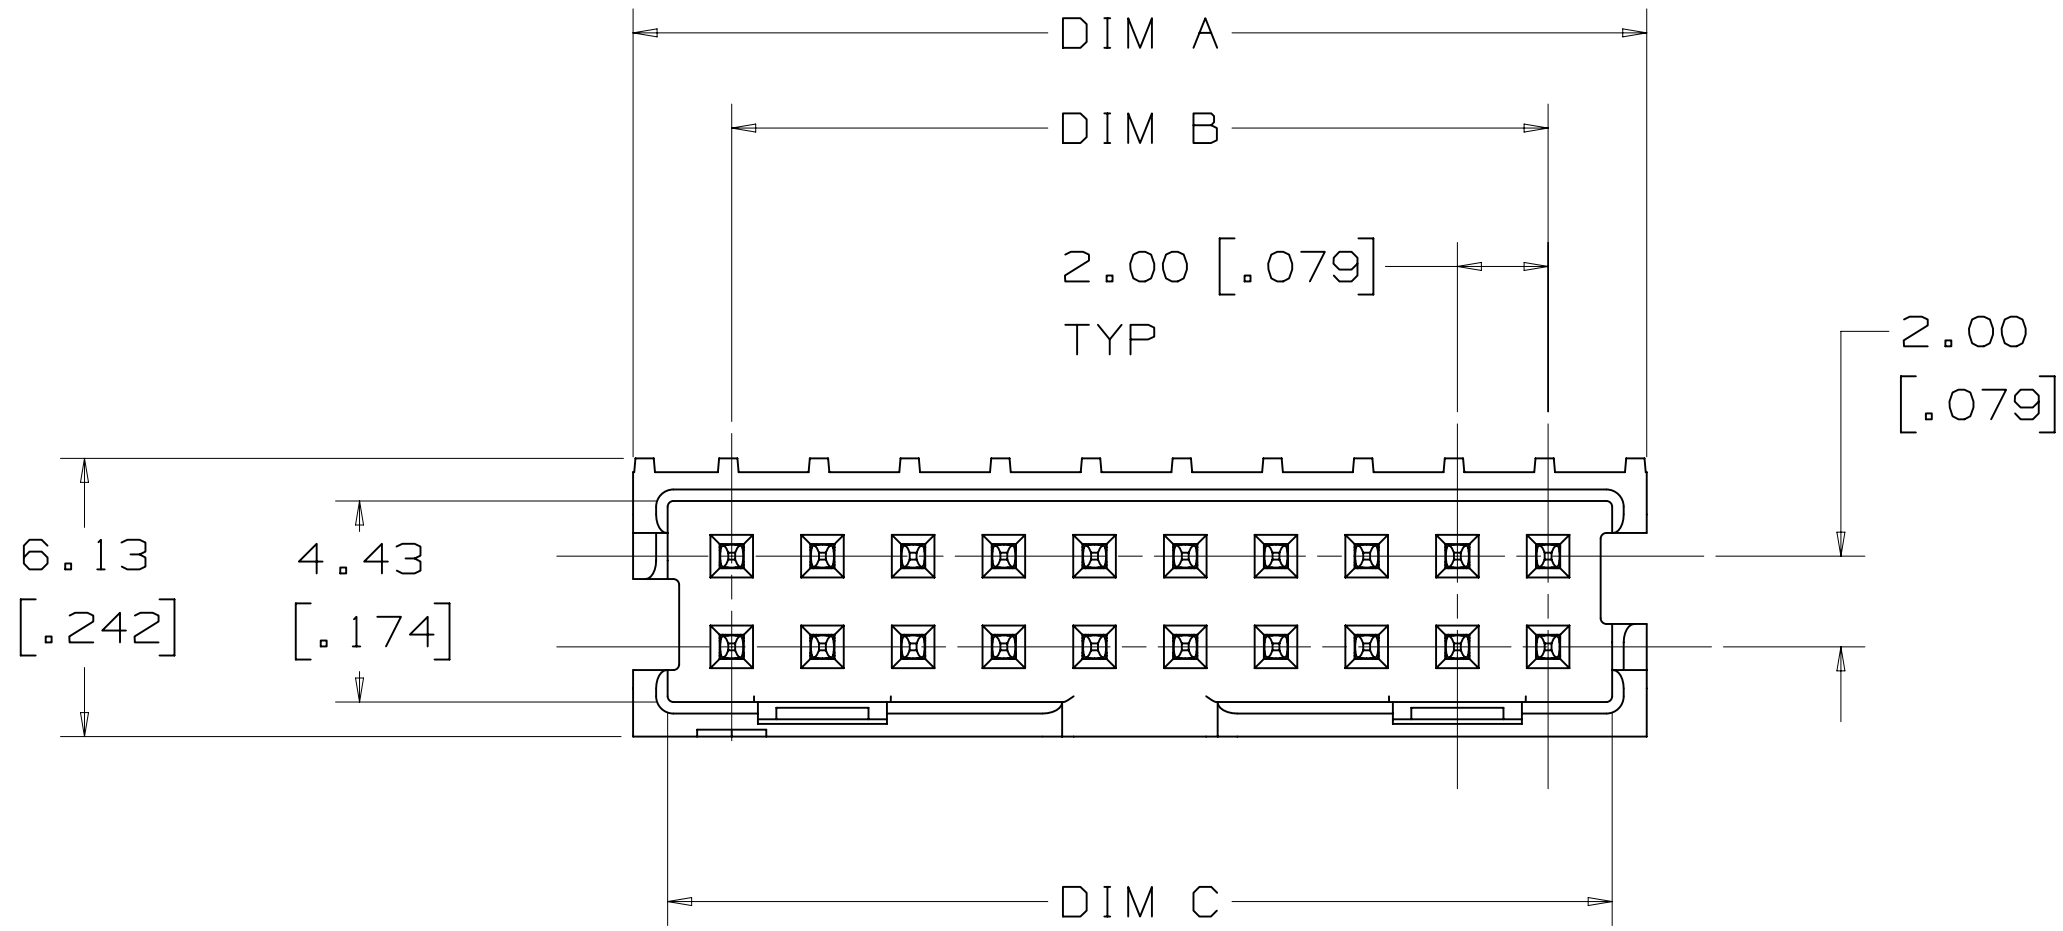

RECOMMENDED PCB HOLE PATTERN
TOLERANCE = 0.05 [.002]

PERFORMANCE [5] [7]	
CURRENT:	1.25 A, ALL LINES ENERGIZED 2.75 A, 6 LINES ENERGIZED 4.75 A, 1 LINE ENERGIZED
INSULATION RESISTANCE:	>1 X 10 ⁹ OHMS AT 500 VDC
WITHSTANDING VOLTAGE:	500 VACrms AT SEA LEVEL
TEMPERATURE RATING:	-55° C TO +105° C
SOLDER PROCESS TEMPERATURE:	260° C MAX PER IPC/JEDEC J-STD-020D

REFERENCE TABLE ON SHEET 5
FOR AVAILABLE POSITIONS AND
SOLDER TAIL LENGTHS

METRIC [ENGLISH]

- NOTES
- 1

MATERIAL:
BODY: HIGH TEMPERATURE
GLASS FILLED LCP, BLACK
UL94V-0
CONTACTS: COPPER ALLOY
- 2

PLATING:
2.03-3.81 μ m [80-150 μ in]
NICKEL UNDERPLATE.
0.38 μ m [15 μ in] OR
0.76 μ m [30 μ in] AVG GOLD
ON WIPING AREA.
5.08 μ m [200 μ in] MIN
MATTE TIN ON SOLDER TAILS.
- 3

STANDARD LENGTH HEADERS
MATE WITH 3M™ SOCKETS,
158 SERIES (REFERENCE 3M
DRAWING 78-5100-2358-9).
- 4

EXTENDED LENGTH HEADERS
MATE WITH 3M™ SOCKETS,
870 SERIES.
- 5





FOR PRODUCT
SPECIFICATIONS AND
WARRANTY INFORMATION SEE
3M 78-5102-0078-1.
- 6

SEE THE REGULATORY
INFORMATION APPENDIX (RIA)
IN THE "RoHS COMPLIANCE"
SECTION OF
WWW.3MCONNECTOR.COM FOR
COMPLIANCE INFORMATION
(RIA E1 & C1 APPLY).
- 7


IN THE EVENT OF CONFLICT
BETWEEN THIS DATA AND
THAT CONTAINED IN THE
PRODUCT SPECIFICATION,
THE PRODUCT SPECIFICATION
TAKES PRECEDENT.

D	41488	JUN 20,2012 REVISED CURRENT RATING IN PERFORMANCE TABLE		LDS	SAN
C	39876	APR 18,2012 REMOVED 32 POS FROM TABLE ON SHT 5		LDS	SAN
B	34080	MAY 18,2011 ADDED 6.19 DIM ON SHT 2; REVISED & MOVED TABLE TO SHT 5		LDS	SF
A	30741	OCT 28,2010 INITIAL RELEASE		LDS	SF
REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DRFT	CHKD	DATE JUL 29,2010	MFG	DATE	
CHKD	CHKD	DATE AUG 09,2010	APPRV S FELDMAN	DATE	
DIVISION		DIVISION CODE			
DO NOT SCALE DRAWING		SCALE 6 1			
THIRD ANGLE PROJECTION		INCHES 0 0.00 0.008 0.000 0.000			
INTERPRET PER ASME Y14.5 - 1994		MILLIMETERS 0 0 0.00 0.00 0.000			
MAX SURFACE ROUGHNESS 125 ALL SURFACES MARKED ONLY		ANGLES ±1°			
TITLE					
3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES					
CAGE NUMBER		SIZE	DRAWING NO.		REV.
125		D	78-5100-2359-7		D
MODEL		DET:	LISTS	YES X NO	SHT 1 OF 5


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length [3] and Extended Length [4]

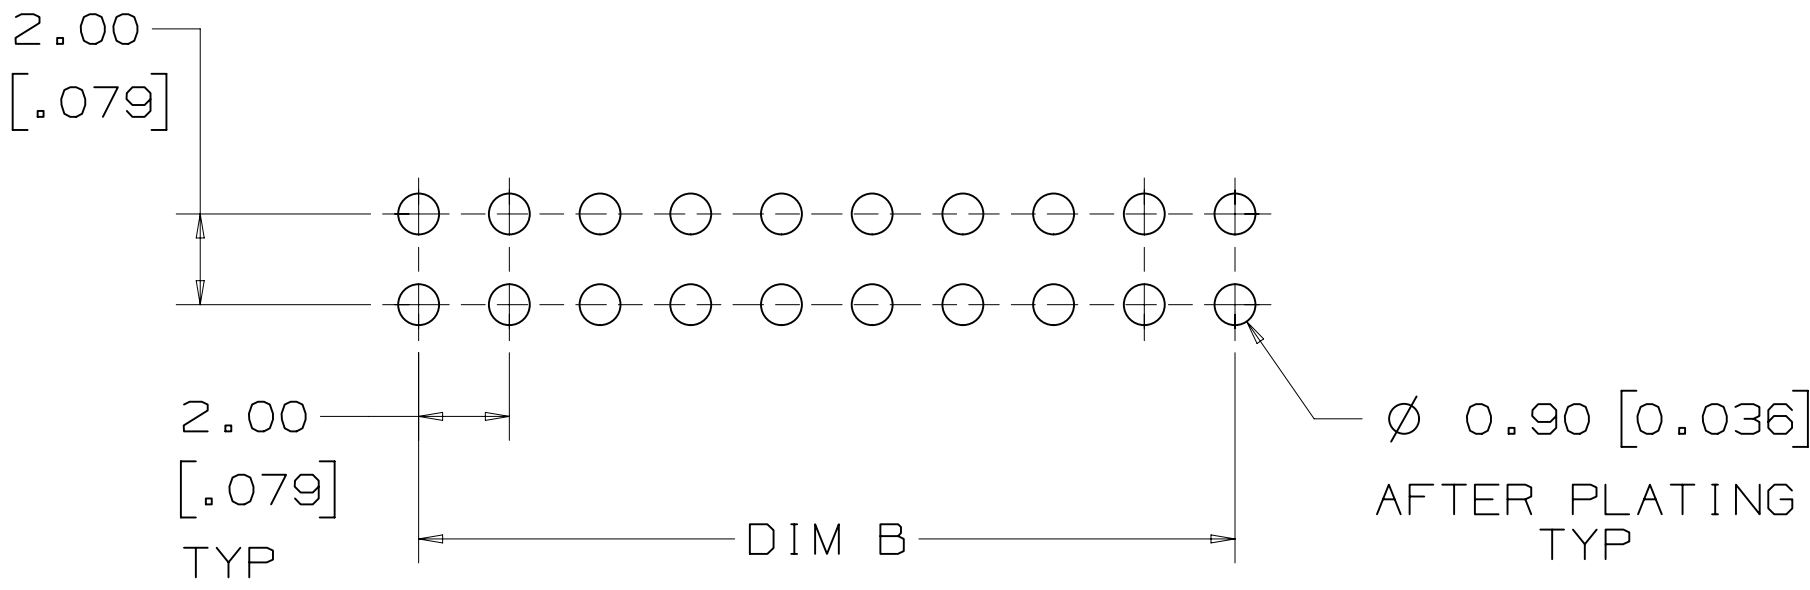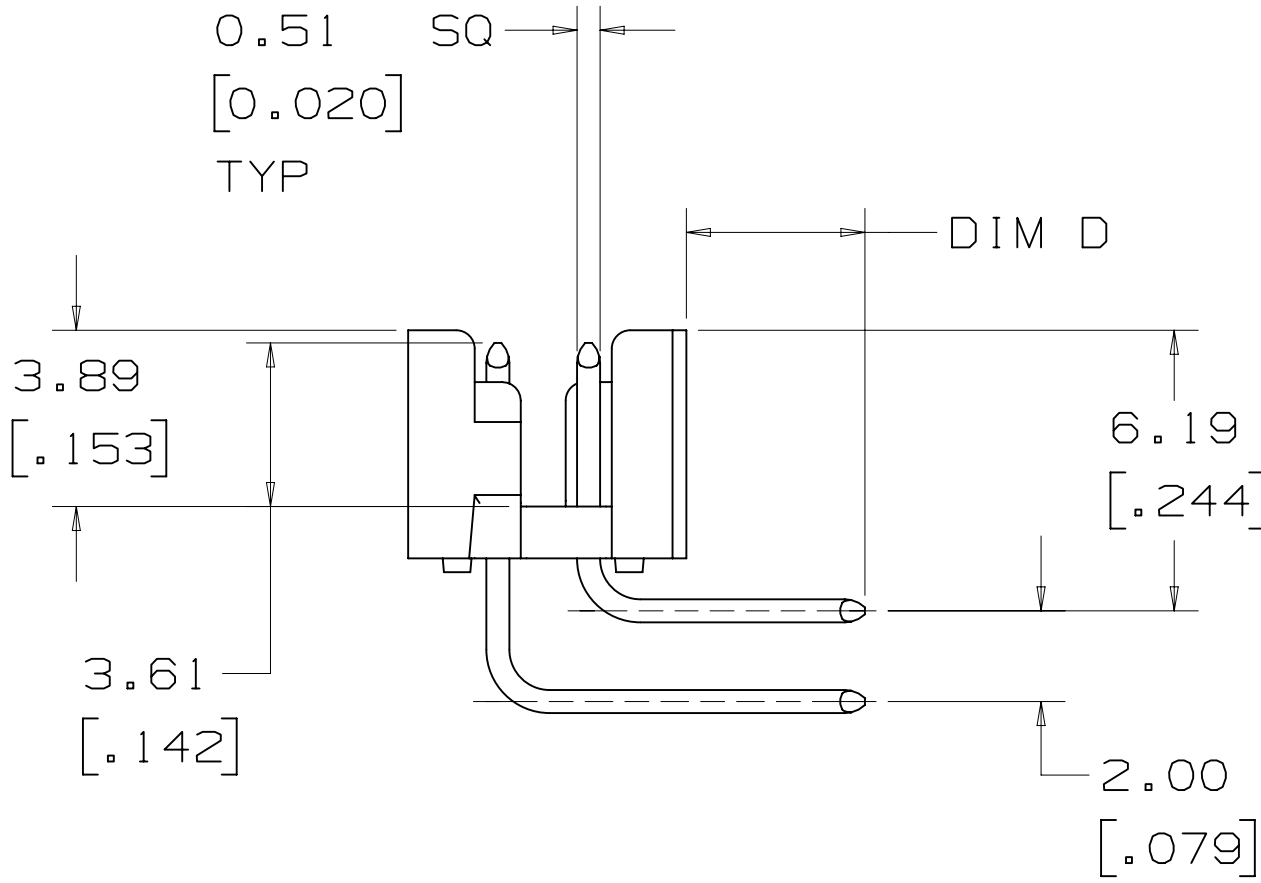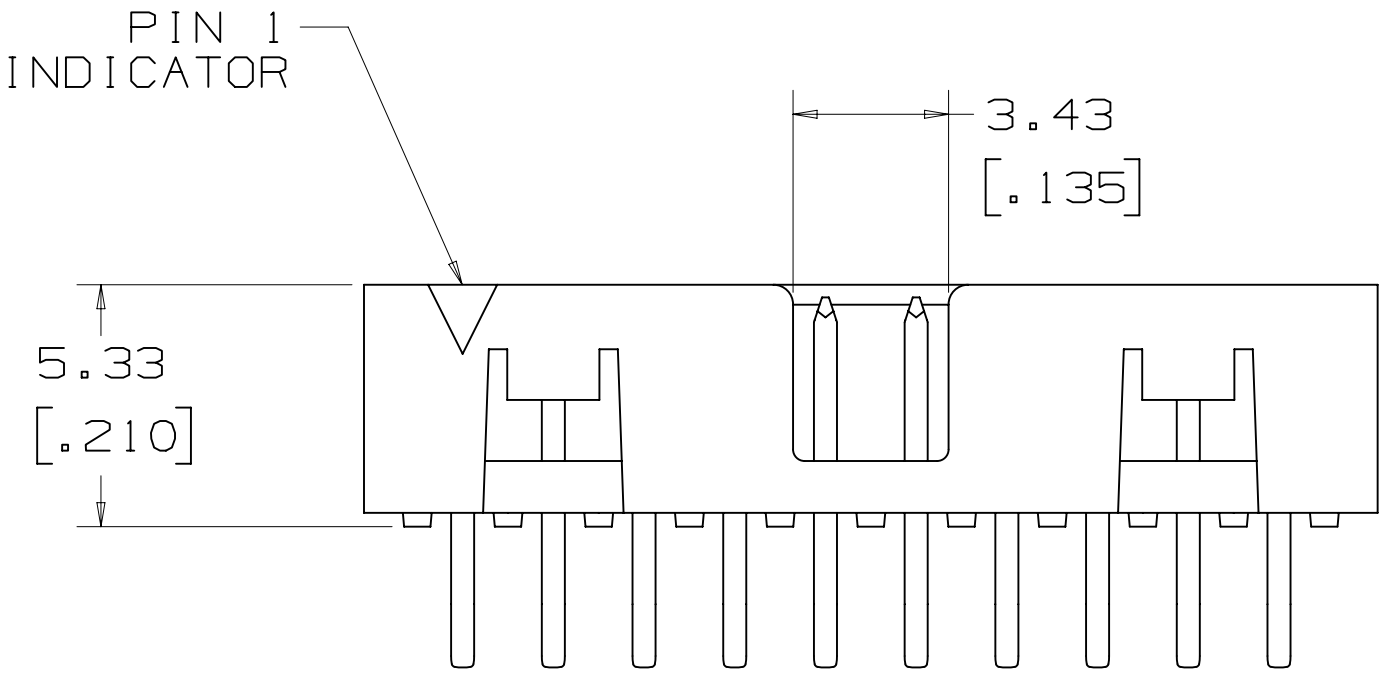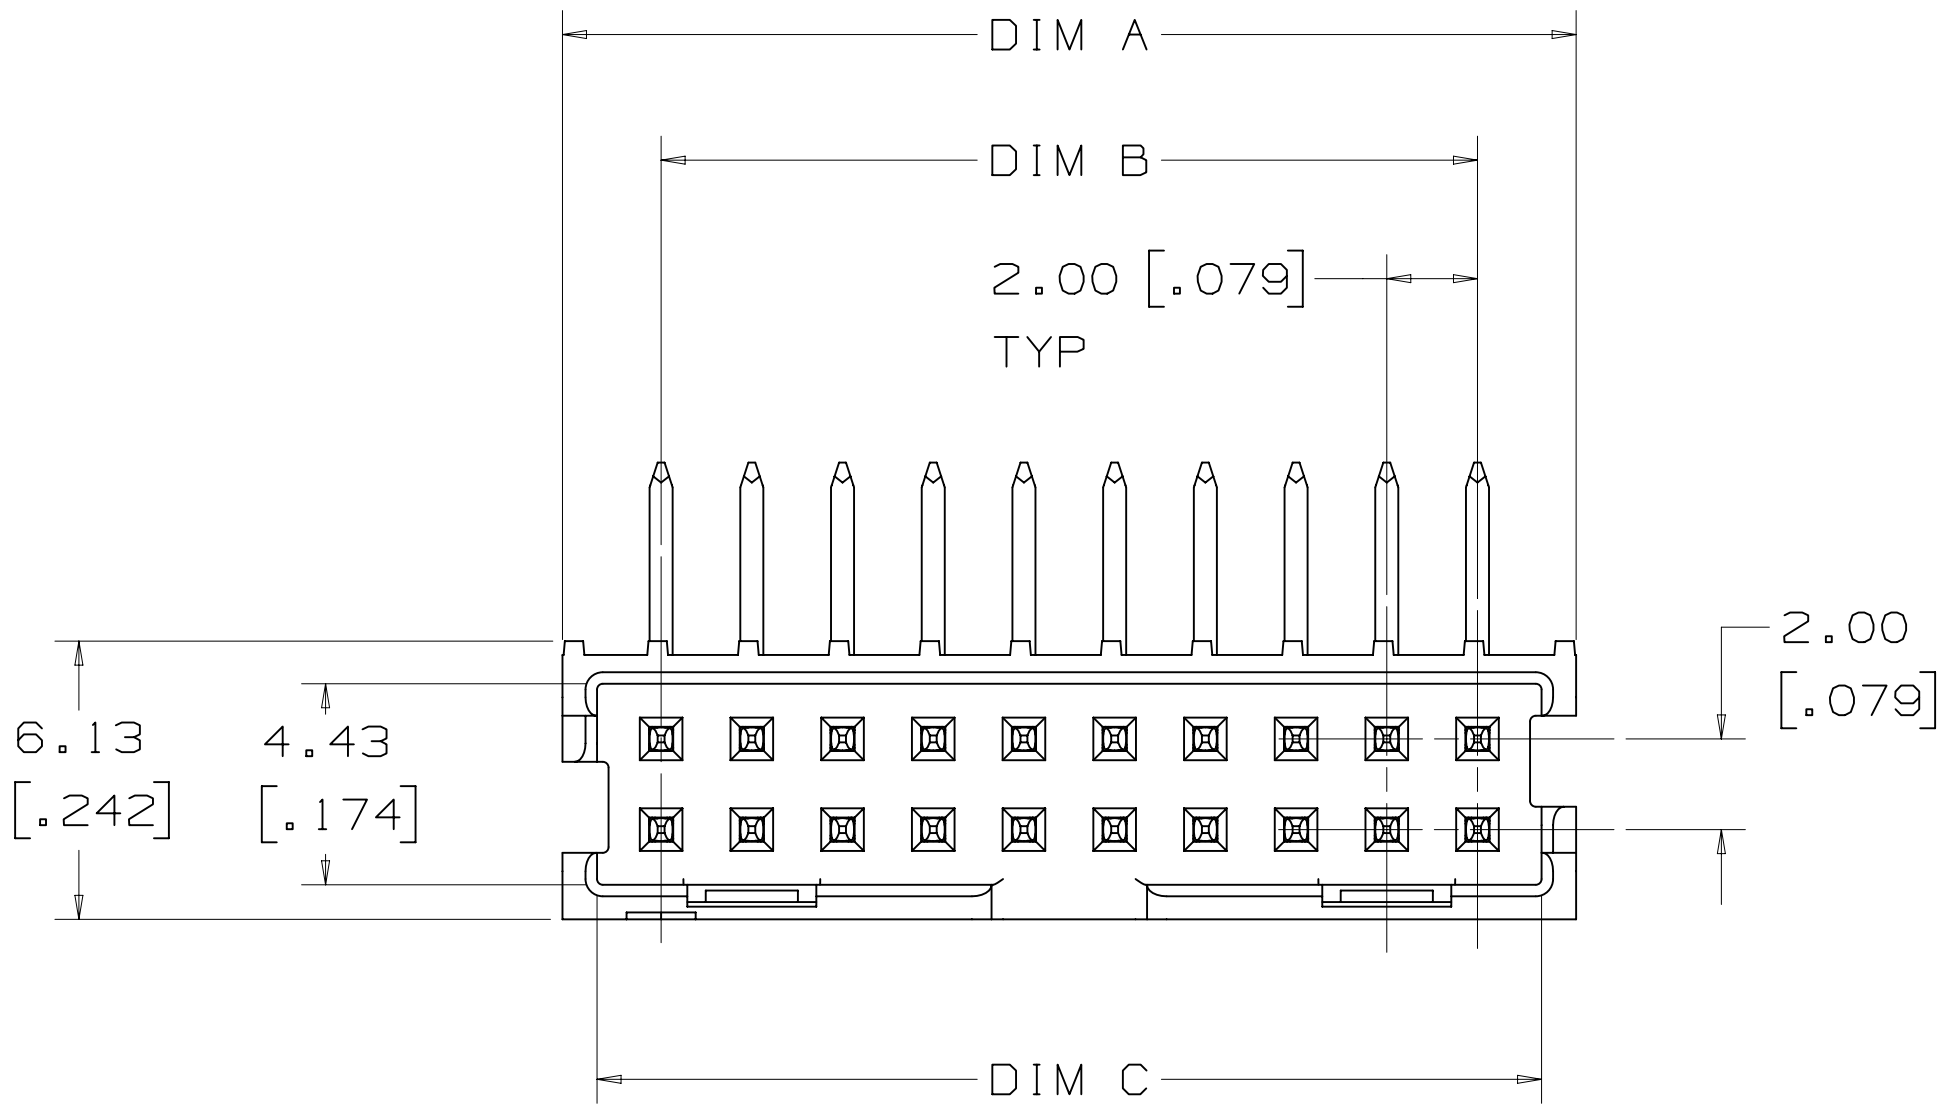


RECOMMENDED PCB HOLE PATTERN
TOLERANCE = ±0.05 [.002]

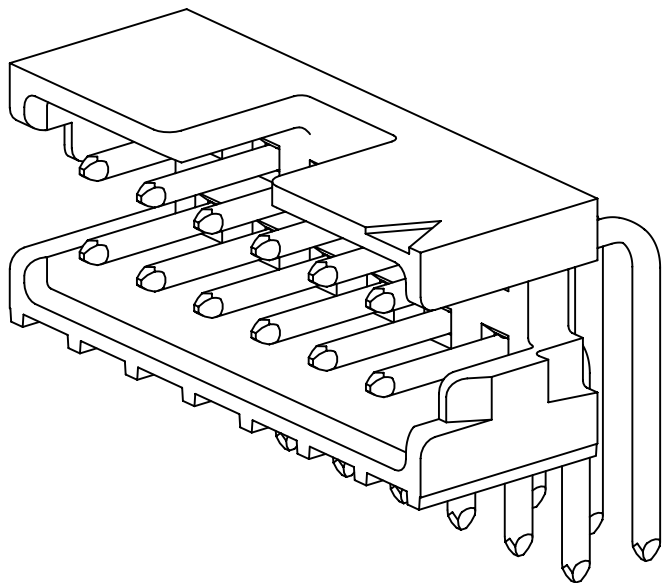

POLARIZATION SLOT
RIGHT ANGLE HEADER
6-12 POSITIONS ONLY

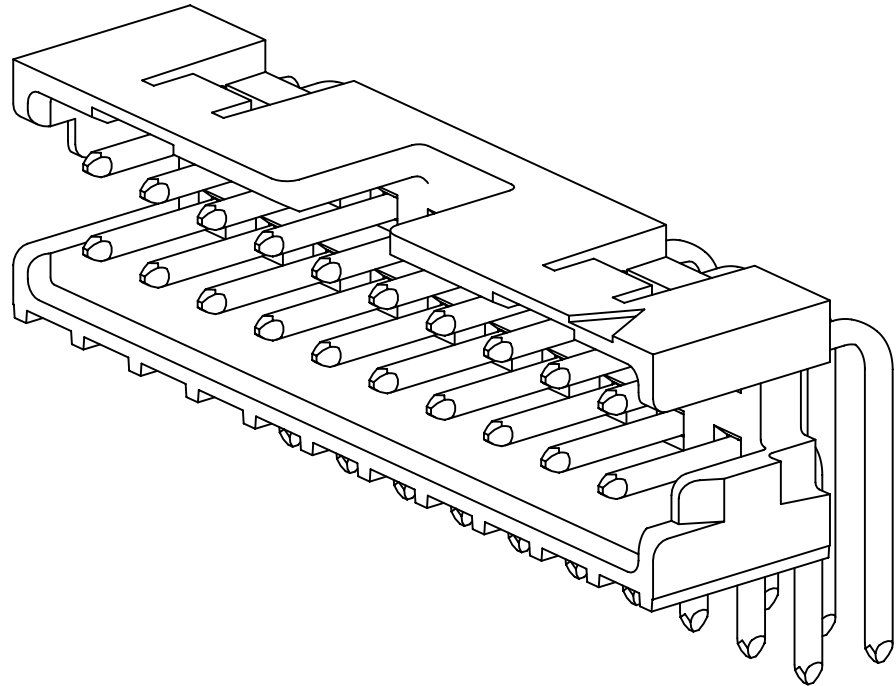

POLARIZATION SLOT AND
DUAL FRICTION LATCHES
RIGHT ANGLE HEADER
14-50 POSITIONS

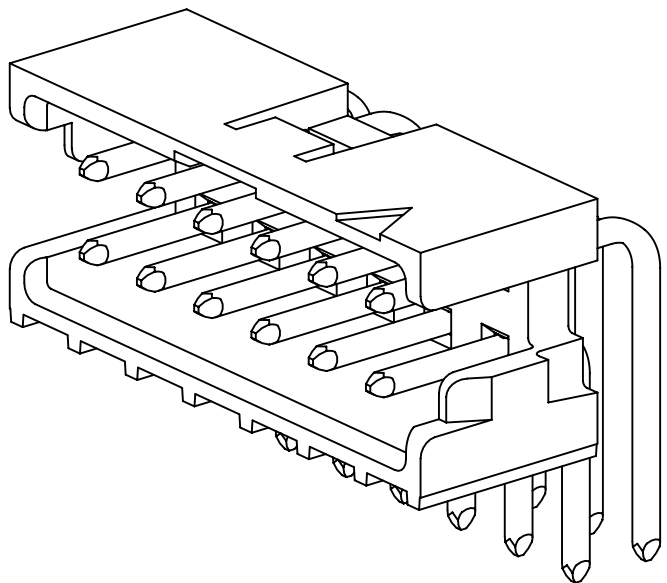





SINGLE FRICTION LATCH
RIGHT ANGLE HEADER
6-12 POSITIONS ONLY

REFERENCE TABLE ON SHEET 5
FOR AVAILABLE POSITIONS AND
SOLDER TAIL LENGTHS


METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DIST. PART NO.		DATE		DRFT	CHKD	DATE	DESCRIPTION	DATE	DESCRIPTION
L. SCHMIDT		JUL 29, 2010		DRFT	CHKD	DATE	DESCRIPTION	DATE	DESCRIPTION
DIVISION		DIVISION CODE		DRFT	CHKD	DATE	DESCRIPTION	DATE	DESCRIPTION
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED		INCHES			
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 1994		MILLIMETERS		MILLIMETERS			
MAX SURFACE ROUGHNESS		ALL SURFACES		ANGLES ±1°		CAGE NUMBER			
125		MARKED ONLY		DRAWING NO.		REV.			
				D		SHT 2 OF 5			


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length 3 and Extended Length 4

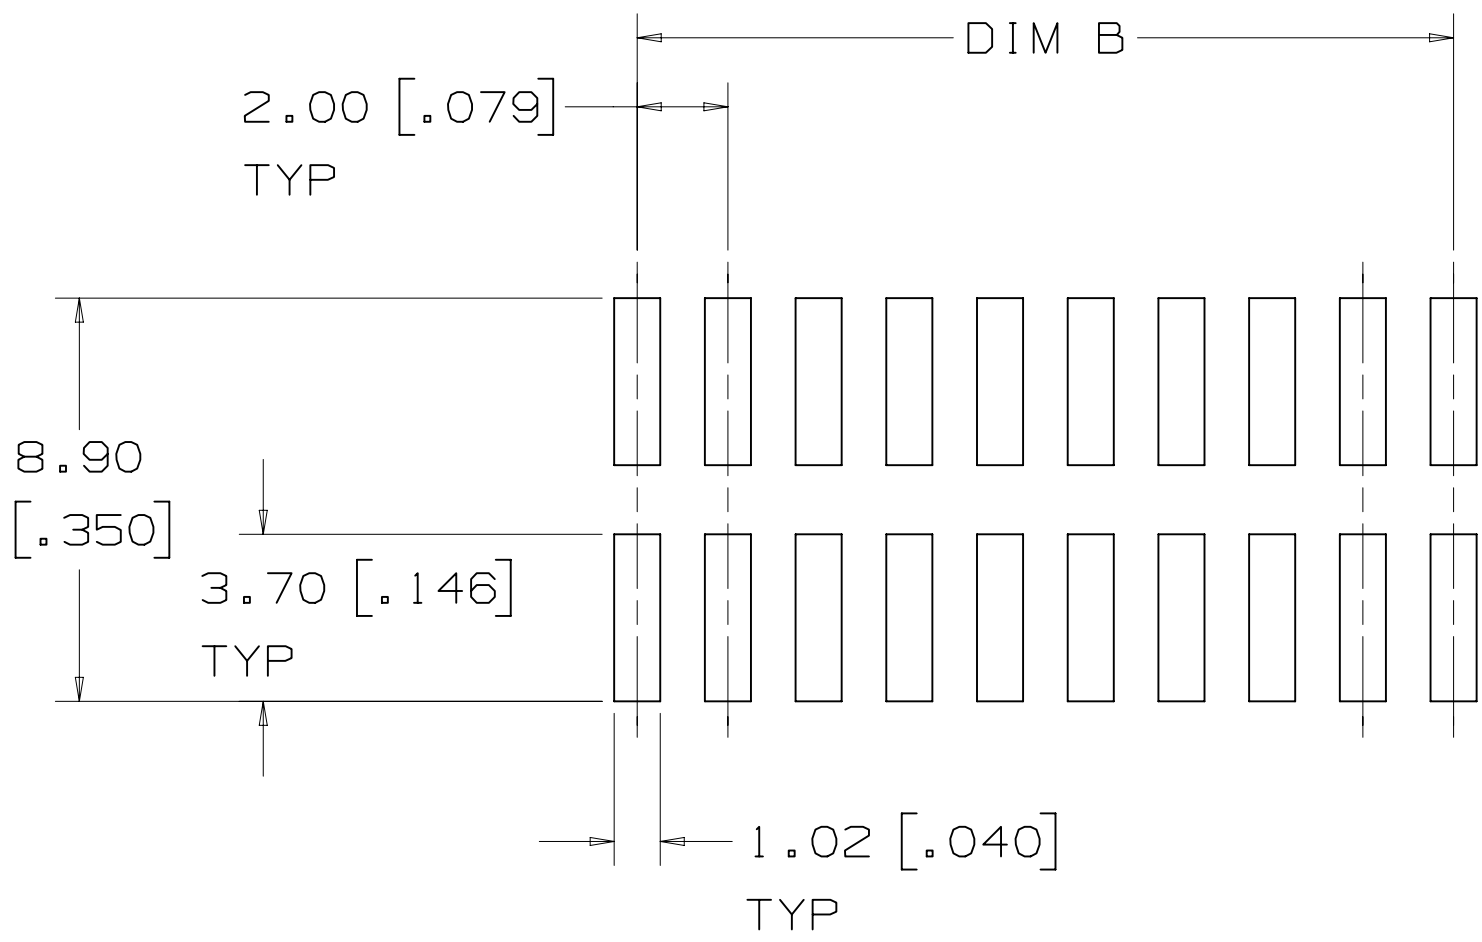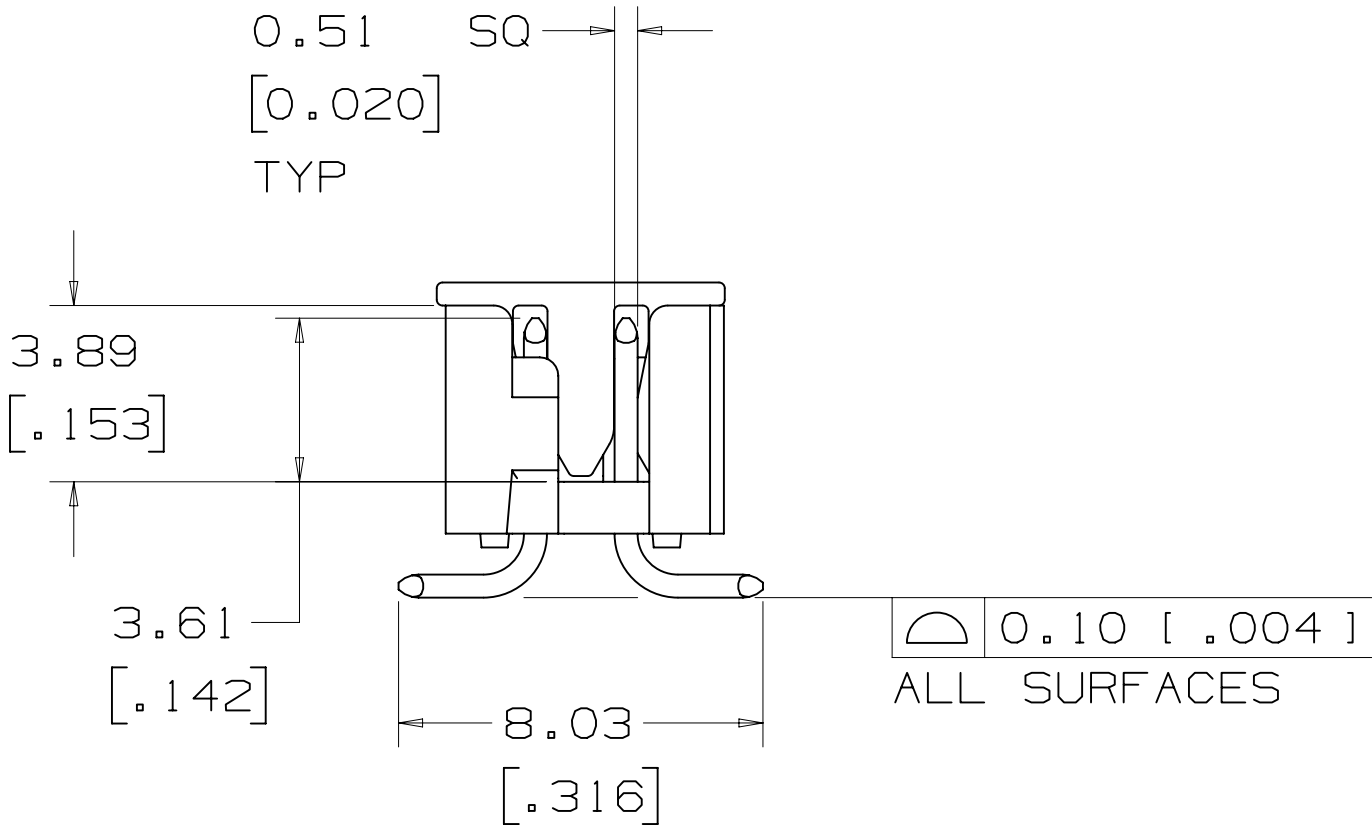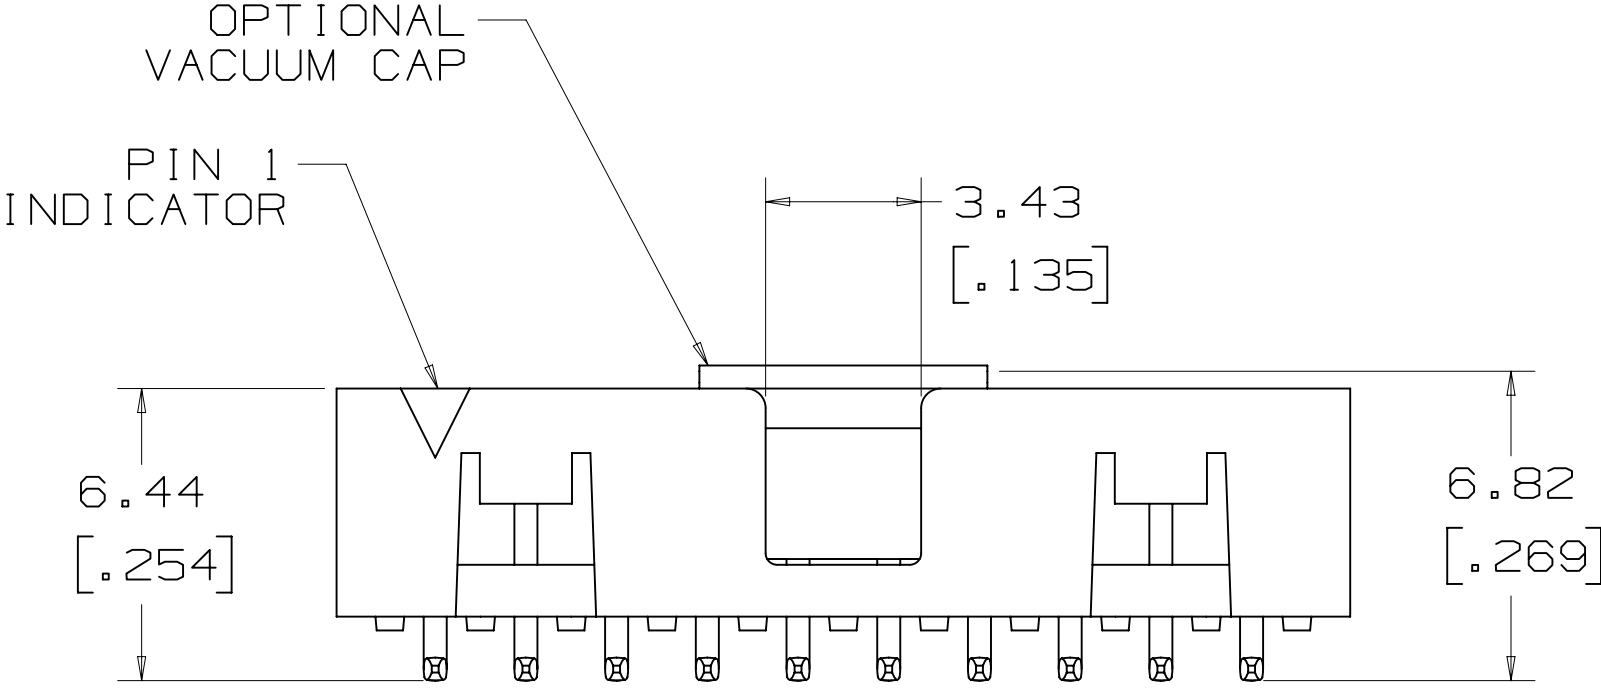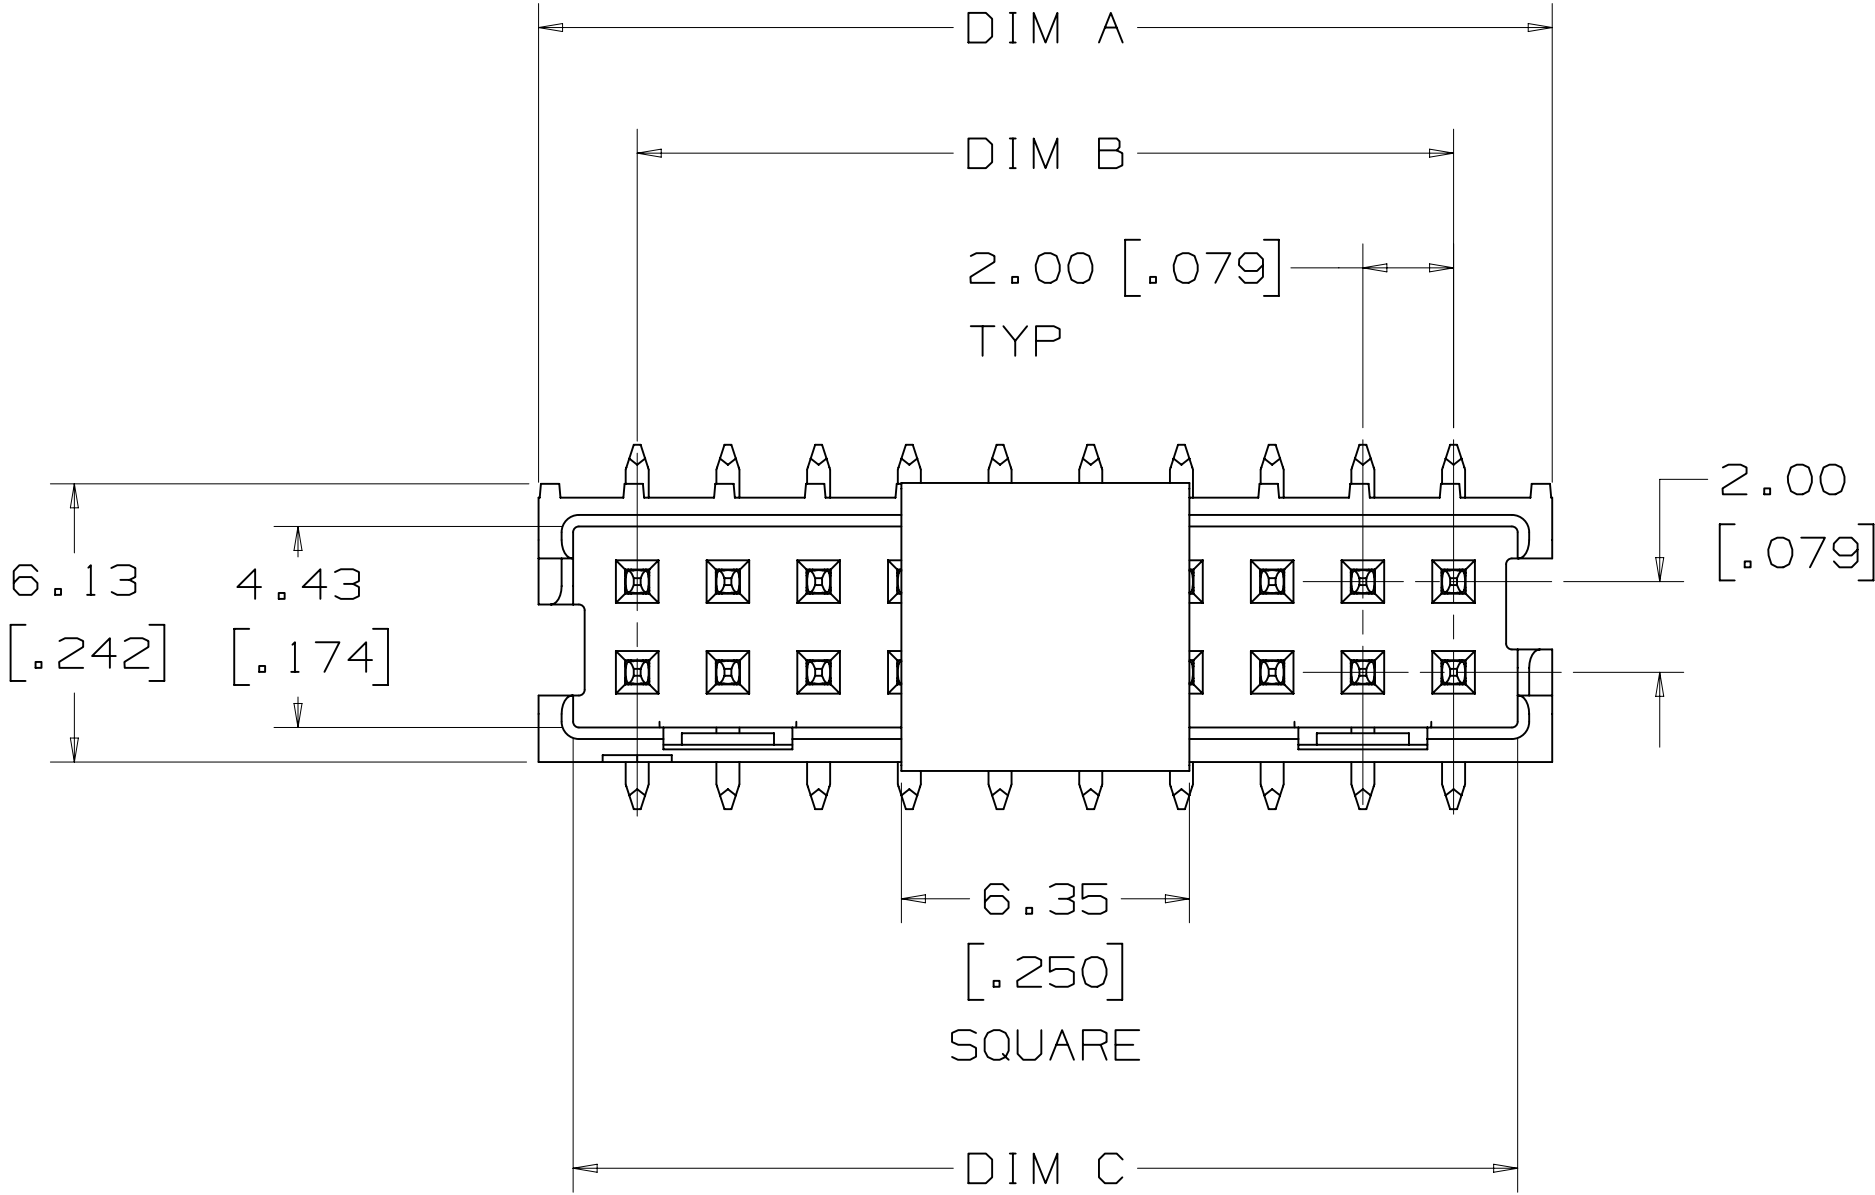


RECOMMENDED PCB PAD PATTERN
TOLERANCE = ±0.08 [0.003]

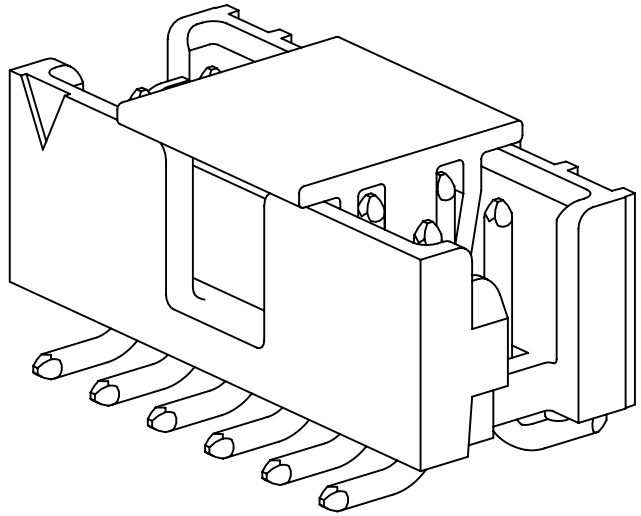

POLARIZATION SLOT
SURFACE MOUNT HEADER
6-12 POSITIONS ONLY

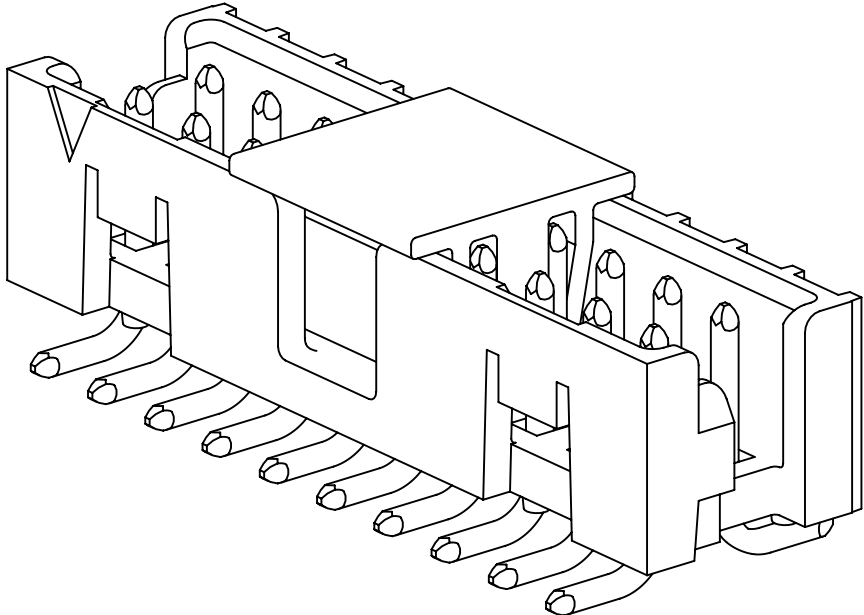

POLARIZATION SLOT AND
DUAL FRICTION LATCHES
SURFACE MOUNT HEADER
14-50 POSITIONS

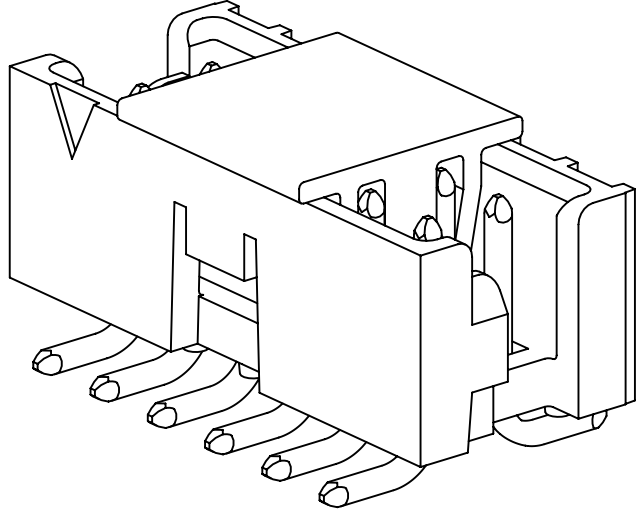

SINGLE FRICTION LATCH
SURFACE MOUNT HEADER
6-12 POSITIONS ONLY


REFERENCE TABLE ON SHEET 5
FOR AVAILABLE POSITIONS

METRIC [ENGLISH]

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
101518-01		L. SCHMIDT	JUL 29, 2010	MFG	DATE	
DIVISION	DIVISION CODE	CHKD	DATE	APPR	DATE	
		S. FELDMAN	AUG 09, 2010			
DO NOT SCALE DRAWING	SCALE 4/1	TOLERANCES EXCEPT AS NOTED				
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 1994	MILLIMETERS 0 ± .00 ± .002 ± .000 ±				
MAX SURFACE ROUGHNESS 125/	ALL SURFACES MARKED ONLY	INCHES .00 ± .00 ± .002 ± .000 ±				
ANGLES ±1°						
		3M		© 3M COPYRIGHT 2010		
		3M Center St. Paul, MN 55144		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.		
		TITLE		3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES		
		CAGE NUMBER	SIZE	DRAWING NO.	REV.	
		125	D	78-5100-2359-7	D	
		MODEL	DET	LISTS	YES	NO
					SHT 3	OF 5


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length 3

STANDARD LENGTH HEADERS
ARE AVAILABLE

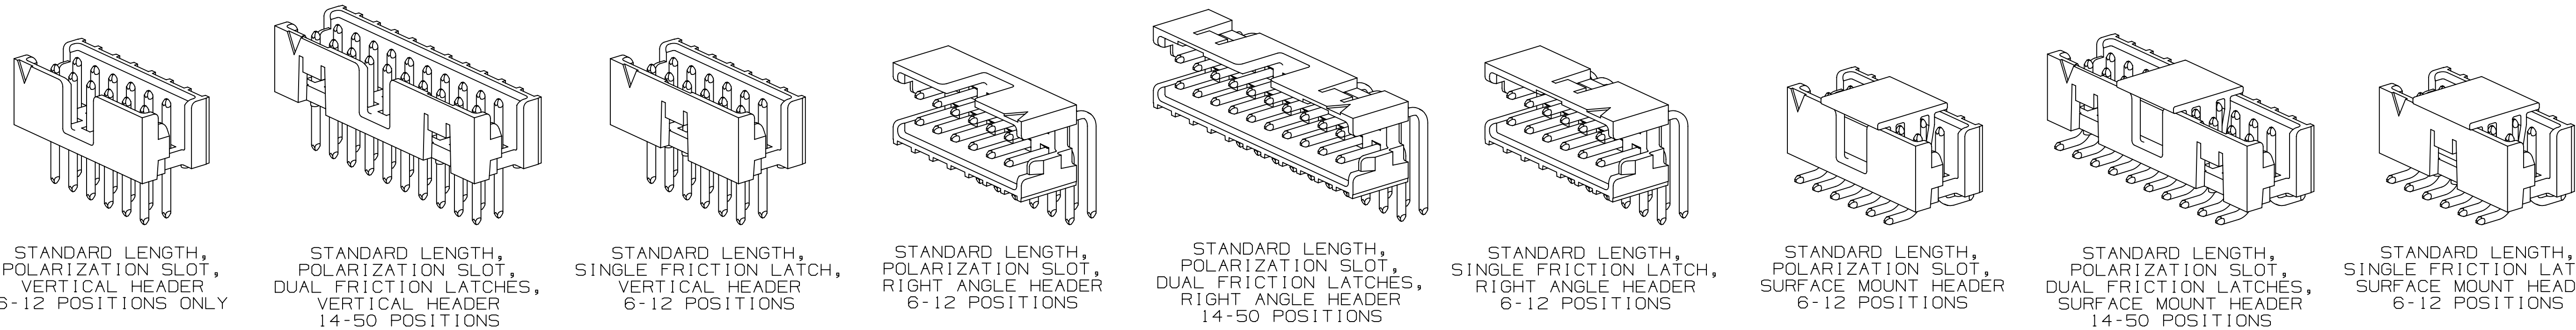

3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Extended Length 4

CALL 3M INTERCONNECT SOLUTIONS
AT 800-225-5373 FOR AVAILABILITY
OF EXTENDED LENGTH HEADERS

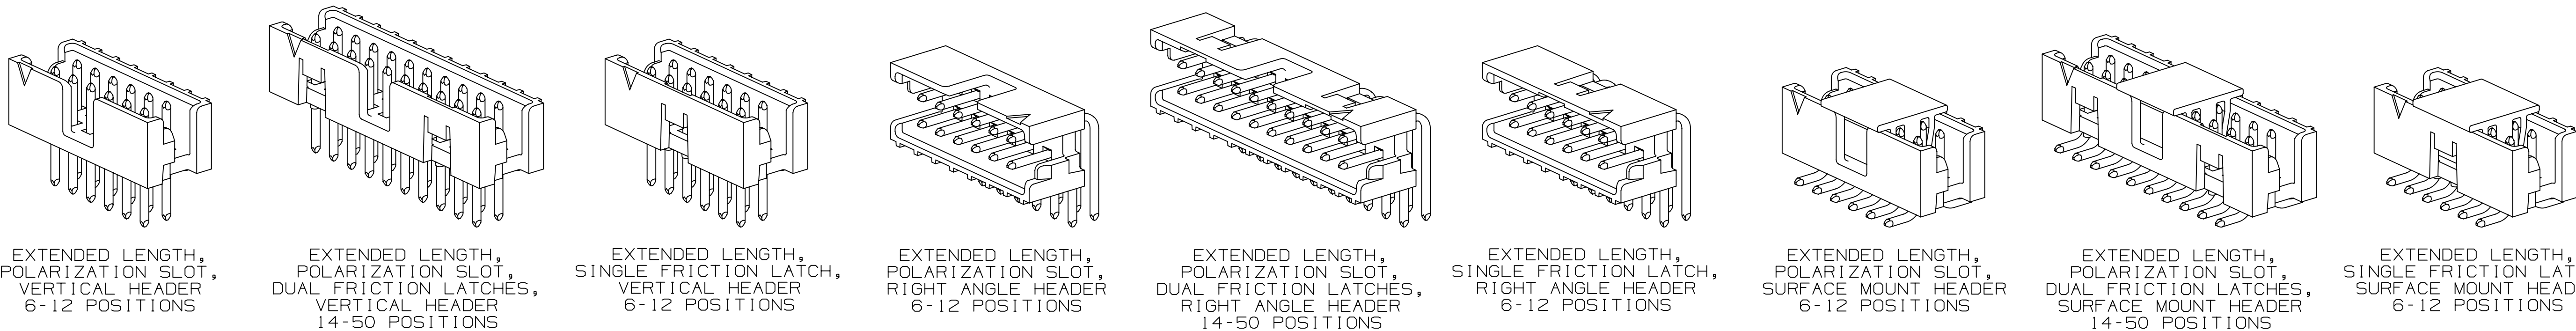

ORDERING INFORMATION

TIER 1 - BEST
1591XX-XXXX

TIER
1 = BEST 0.76 μm
[30 μin] GOLD

POSITION COUNT
(SEE TABLE)

PART CONFIGURATION
2 = VERTICAL SMT
5 = RIGHT ANGLE THRU HOLE
6 = VERTICAL THRU HOLE

BODY LENGTH
0 = STANDARD LENGTH
(MATES TO 158 SERIES)
1 = EXTENDED LENGTH
(MATES TO 870 SERIES)

CONTACT TAIL LENGTH
2 = 2.84 mm [.112]
3 = 3.94 mm [.155]

POLARIZATION/LATCHING
0 = POLARIZATION SLOT AND
DUAL FRICTION LATCHES
(14-50 POSITIONS ONLY)
1 = POLARIZATION SLOT
(6-12 POSITIONS ONLY)
2 = SINGLE FRICTION LATCH
(6-12 POSITIONS ONLY)

TIER 2 - BETTER
1592XX-XXXX

TIER
2 = BETTER 0.38 μm
[15 μin] GOLD

POSITION COUNT
(SEE TABLE)



PART CONFIGURATION
2 = VERTICAL SMT
5 = RIGHT ANGLE THRU HOLE
6 = VERTICAL THRU HOLE

BODY LENGTH
0 = STANDARD LENGTH
(MATES TO 158 SERIES)
1 = EXTENDED LENGTH
(MATES TO 870 SERIES)

CONTACT TAIL LENGTH
2 = 2.84 mm [.112]
3 = 3.94 mm [.155]

POLARIZATION/LATCHING
0 = POLARIZATION SLOT AND
DUAL FRICTION LATCHES
(14-50 POSITIONS ONLY)
1 = POLARIZATION SLOT
(6-12 POSITIONS ONLY)
2 = SINGLE FRICTION LATCH
(6-12 POSITIONS ONLY)

METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTRIBUTION CODES				DRFT	L. SCHMIDT	DATE	JUL 29, 2010	MFG	DATE
				CHKD		DATE		APPROV	DATE
								S. FELDMAN	AUG 09, 2010
DIVISION		DIVISION CODE		© 3M COPYRIGHT 2010					
DO NOT SCALE DRAWING		SCALE 4 1		TOLERANCES EXCEPT AS NOTED		This document and the information it contains are 3M property and may not be reproduced or further distributed without the express permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
				INCHES ± .00 ± .003 ± .0000		TITLE 3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES			
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 1994		MILLIMETERS ± .00 ± .013 ± .000		CAGE NUMBER D 78-5100-2359-7			
MAX SURFACE ROUGHNESS 125 ✓ X MARKED ONLY				ANGLES ± 1°		MODEL DET. LISTS YES X NO SHT 4 OF 6			

3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length

3

 and Extended Length

4

NUMBER OF POSITIONS	SHROUDED BOX HEADER						
	DIM A		DIM B	DIM C		DIM D	
	STANDARD	EXTENDED		STANDARD	EXTENDED		
6	8.35 [.329]	9.52 [.375]	4.00 [.157]	6.83 [.269]	7.99 [.315]	2.84 [.112]	3.94 [.155]
8	10.35 [.407]	11.52 [.453]	6.00 [.236]	8.83 [.347]	9.99 [.393]	2.84 [.112]	3.94 [.155]
10	12.35 [.486]	13.52 [.532]	8.00 [.315]	10.83 [.426]	11.99 [.472]	2.84 [.112]	3.94 [.155]
12	14.35 [.565]	15.52 [.611]	10.00 [.394]	12.83 [.505]	13.99 [.551]	2.84 [.112]	3.94 [.155]
14	16.35 [.644]	17.52 [.690]	12.00 [.472]	14.83 [.584]	15.99 [.630]	2.84 [.112]	3.94 [.155]
16	18.35 [.722]	19.52 [.768]	14.00 [.551]	16.83 [.662]	17.99 [.708]	2.84 [.112]	3.94 [.155]
20	22.35 [.880]	23.52 [.926]	18.00 [.709]	20.83 [.820]	21.99 [.866]	2.84 [.112]	3.94 [.155]
22	24.35 [.959]	25.52 [1.005]	20.00 [.787]	22.83 [.899]	23.99 [.945]	2.84 [.112]	3.94 [.155]
24	26.35 [1.037]	27.52 [1.083]	22.00 [.866]	24.83 [.977]	25.99 [1.023]	2.84 [.112]	3.94 [.155]
26	28.35 [1.116]	29.52 [1.162]	24.00 [.945]	26.83 [1.056]	27.99 [1.102]	2.84 [.112]	3.94 [.155]
30	32.35 [1.274]	33.52 [1.320]	28.00 [1.102]	30.83 [1.214]	31.99 [1.260]	2.84 [.112]	3.94 [.155]
34	36.35 [1.431]	37.52 [1.477]	32.00 [1.260]	34.83 [1.371]	35.99 [1.417]	2.84 [.112]	3.94 [.155]
40	42.35 [1.667]	43.52 [1.713]	38.00 [1.496]	40.83 [1.607]	41.99 [1.653]	2.84 [.112]	3.94 [.155]
44	46.35 [1.825]	47.52 [1.871]	42.00 [1.654]	44.83 [1.765]	45.99 [1.811]	2.84 [.112]	3.94 [.155]
50	52.35 [2.061]	53.52 [2.107]	48.00 [1.890]	50.83 [2.001]	51.99 [2.047]	2.84 [.112]	3.94 [.155]

METRIC [ENGLISH]

D	41488	JUN 20,2012 REVISED CURRENT RATING IN PERFORMANCE TABLE	LDS	SAN
C	39876	APR 18,2012 REMOVED 32 POS FROM TABLE ON SHT 5	LDS	SAN
B	34080	MAY 18,2011 ADDED 6.19 DIM ON SHT 2; REVISED & MOVED TABLE TO SHT 5	LDS	SF
A	30741	OCT 28,2010 INITIAL RELEASE	LDS	SF
REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
DRP	L. SCHMIDT	DATE JUL 29,2010	MFG	DATE
CHKD		DATE	APPRV	DATE
			S FELDMAN	AUG 09,2010
DIVISION		DIVISION CODE		
DO NOT SCALE DRAWING	SCALE 1 1	TOLERANCES EXCEPT AS NOTED		
THIRD ANGLE PROJECTION		INCHES .0 .00 .002 .0000 ±		
INTERPRET PER ASME Y14.5 - 1994		MILLIMETERS 0 ± .0 .00 +0.13 .000 ±		
MAX SURFACE ROUGHNESS 125 / ✓ □ ALL SURFACES ✗ MARKED ONLY		CAGE NUMBER D 78-5100-2359-7		
		DRAWING NO. 78-5100-2359-7		
		REV. D		
		MODEL		
		DET LISTS		
		YES NO		
		SHT 5 OF 5		



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.