
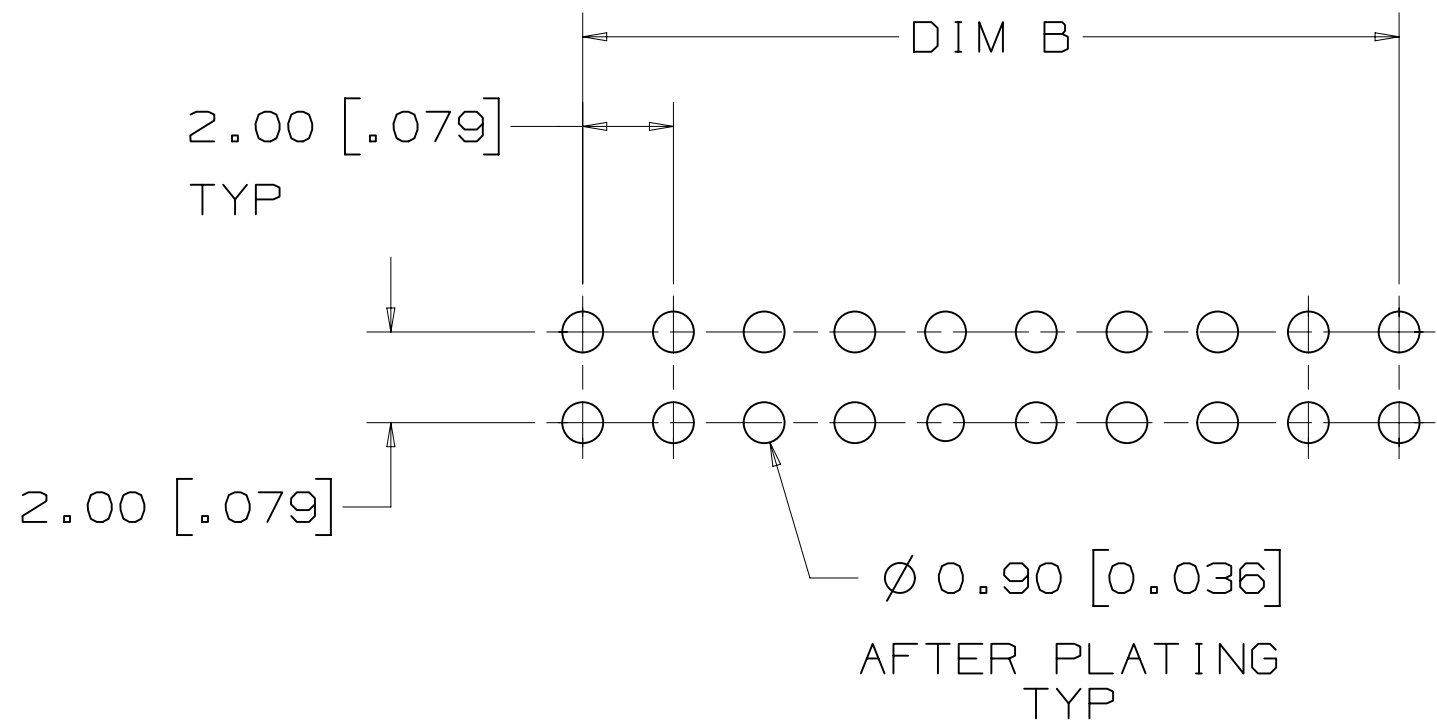
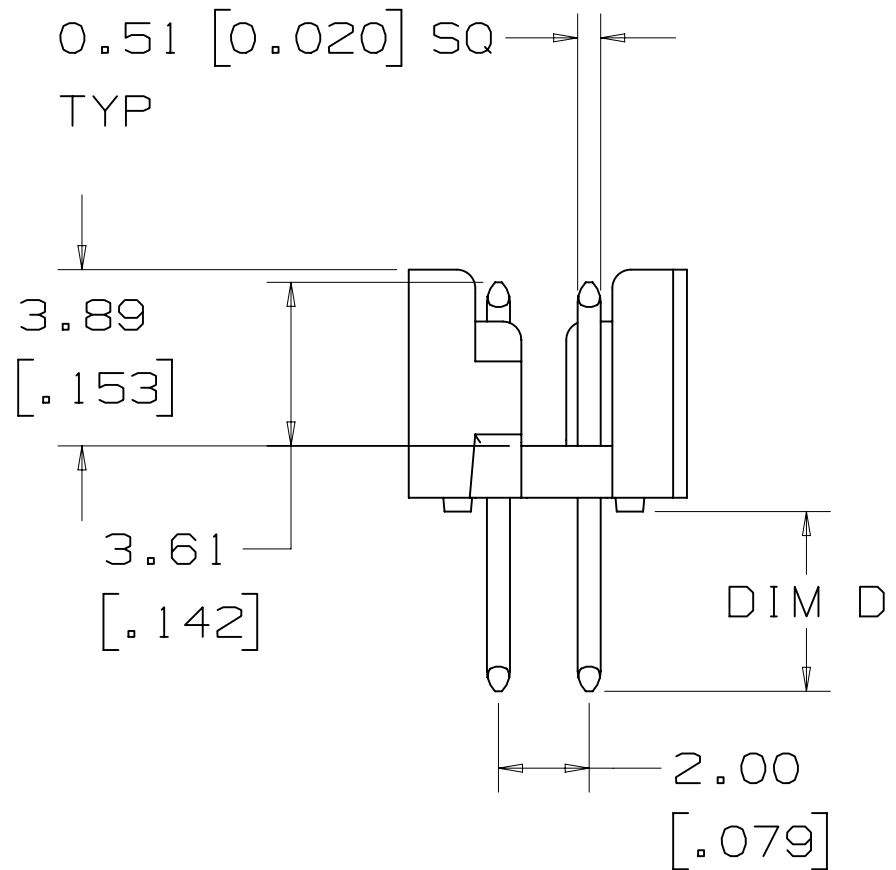
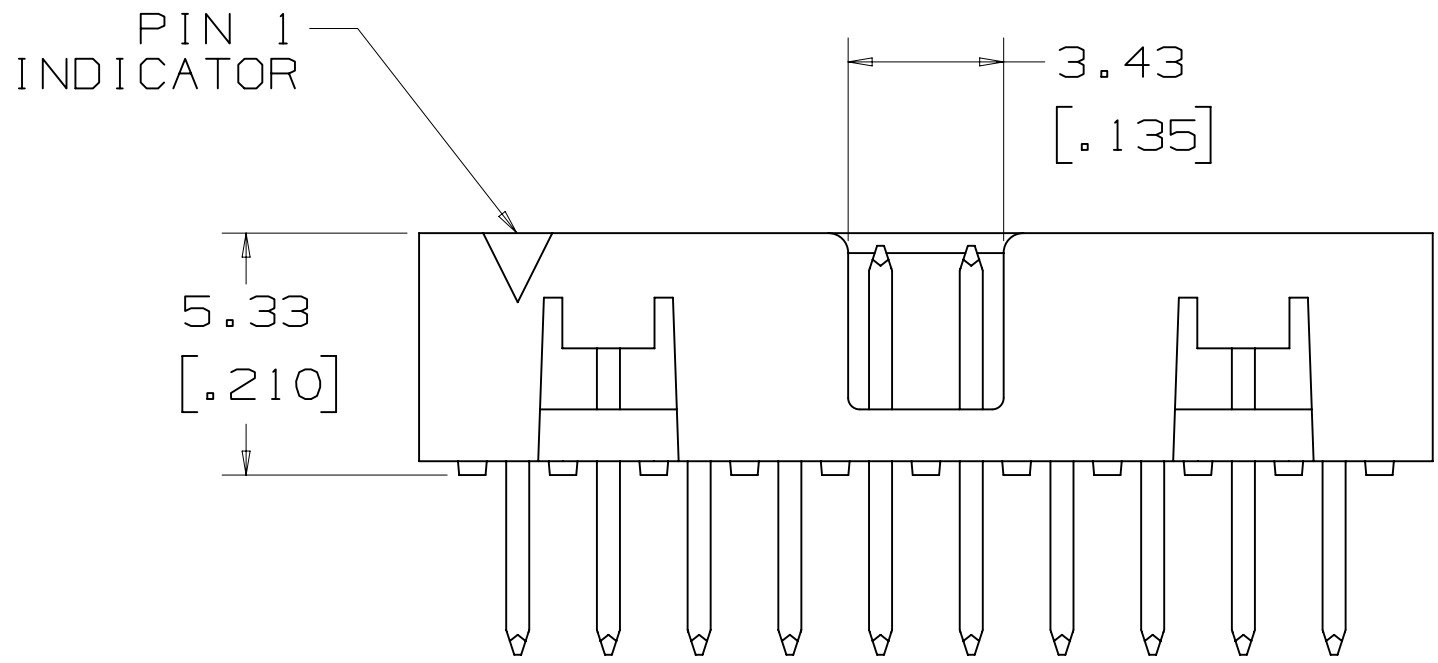
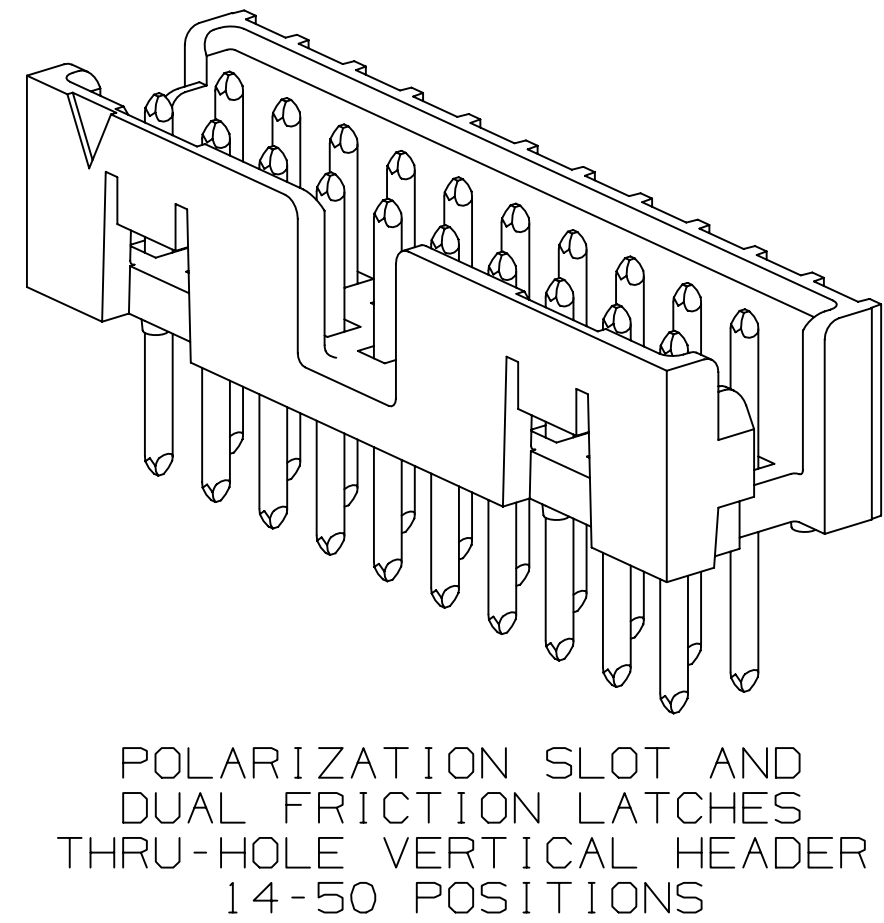
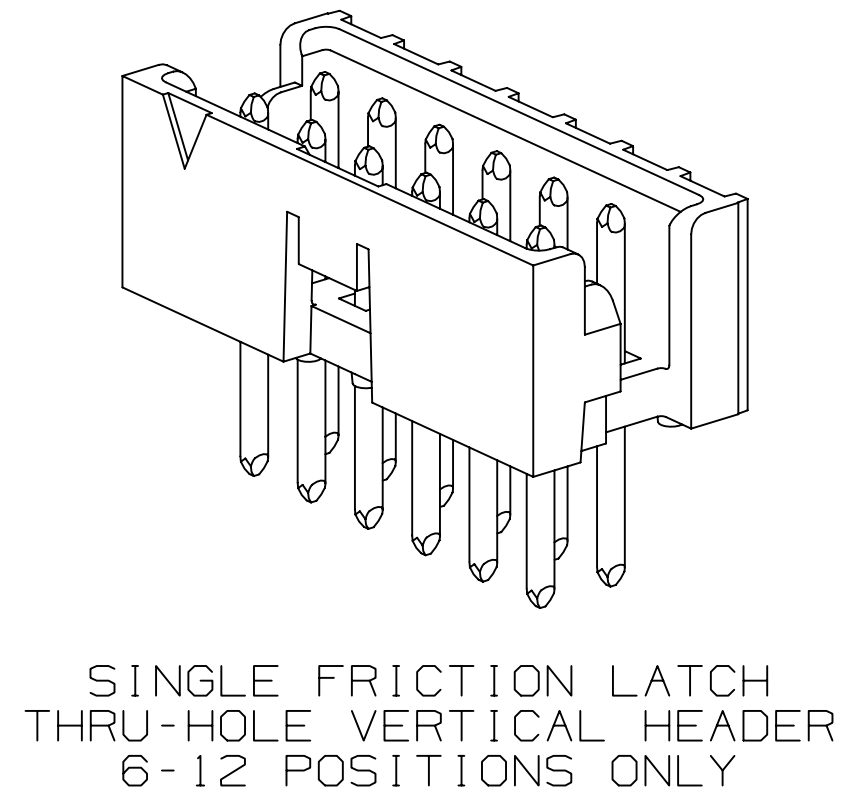
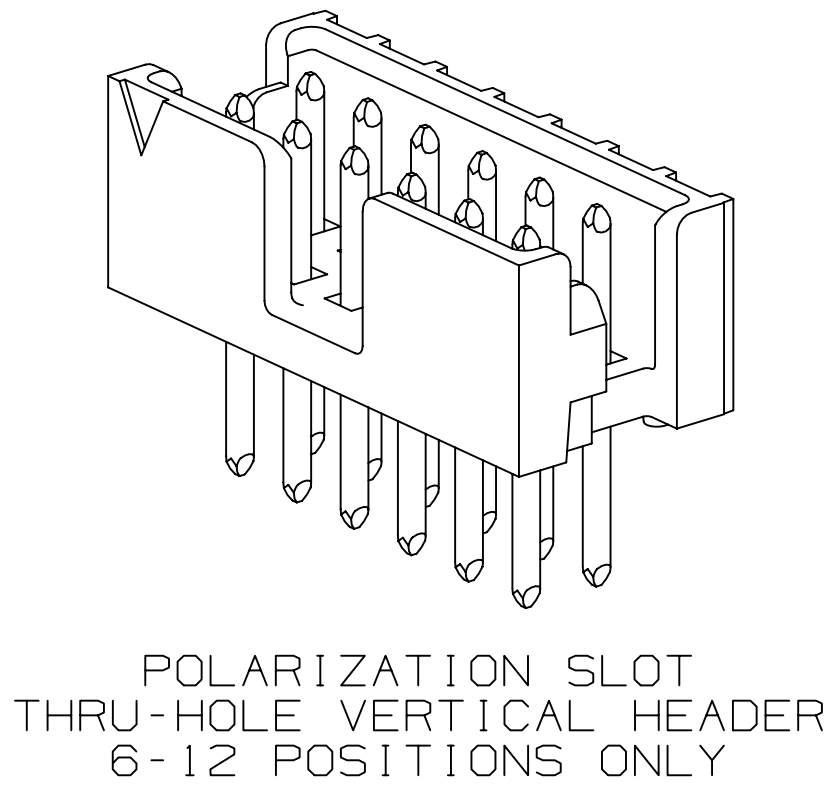


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length [3] and Extended Length [4]

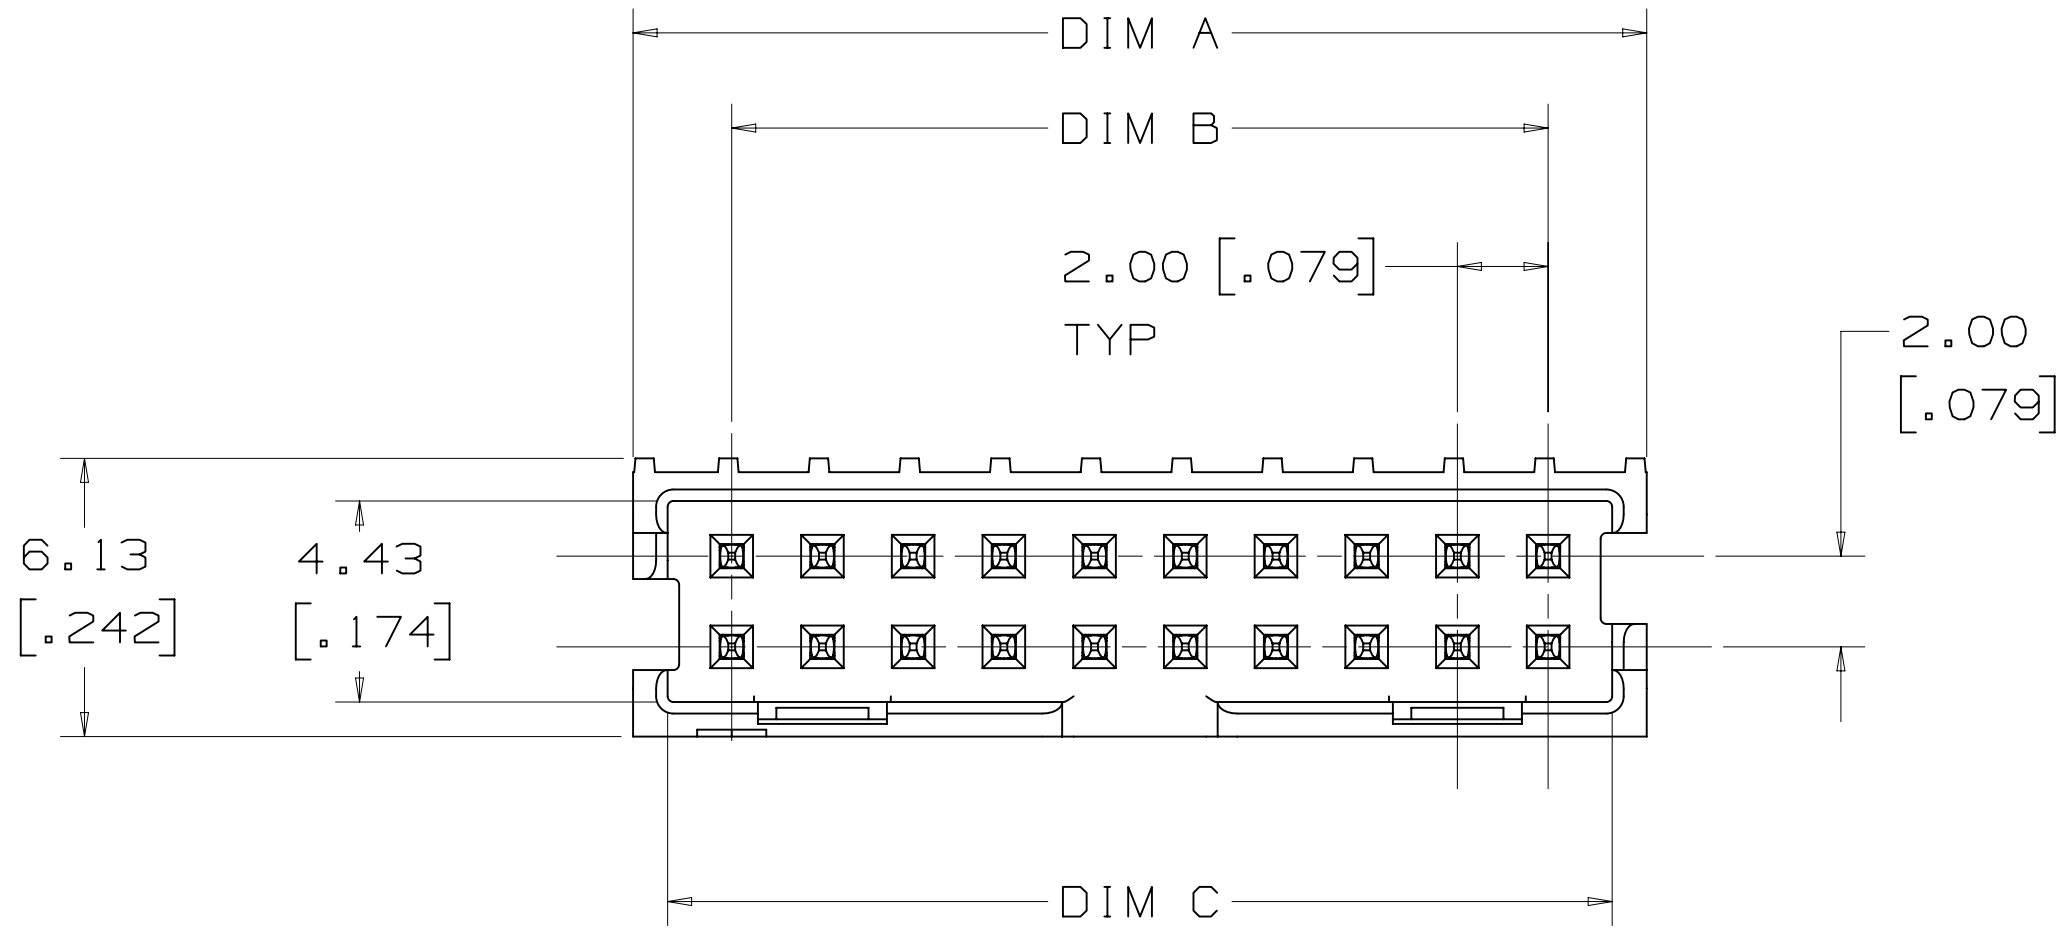


RECOMMENDED PCB HOLE PATTERN
TOLERANCE = 0.05 [.002]




PERFORMANCE [5] [7]	
CURRENT:	1.25 A, ALL LINES ENERGIZED 2.75 A, 6 LINES ENERGIZED 4.75 A, 1 LINE ENERGIZED
INSULATION RESISTANCE:	>1 X 10 ⁹ OHMS AT 500 VDC
WITHSTANDING VOLTAGE:	500 VACrms AT SEA LEVEL
TEMPERATURE RATING:	-55° C TO +105° C
SOLDER PROCESS TEMPERATURE:	260° C MAX PER IPC/JEDEC J-STD-020D

REFERENCE TABLE ON SHEET 5
FOR AVAILABLE POSITIONS AND
SOLDER TAIL LENGTHS



METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTRIBUTION CODES				DRFT L. SCHMIDT	DATE JUL 29, 2010	MFG DATE		DATE	
				CHKD	DATE	APPROV S. FELDMAN		DATE AUG 09, 2010	
DIVISION		DIVISION CODE		© 3M COPYRIGHT 2010					
DO NOT SCALE DRAWING		SCALE 6 1		TOLERANCES EXCEPT AS NOTED		This document and the information it contains are 3M property and may not be reproduced or further distributed without the express permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
		INCHES 0.00 0.00 0.00 0.000 ±		MILLIMETERS 0.00 0.00 0.00 0.00 ± 0.13 0.00 ±		TITLE 3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES			
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 1994		CAGE NUMBER D		DRAWING NO. 78-5100-2359-7		REV. D	
MAX SURFACE ROUGHNESS 125 ✓ X MARKED ONLY		ALL SURFACES		MODEL		DET. LISTS YES X NO SHT 1 OF 6			


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length 3 and Extended Length 4

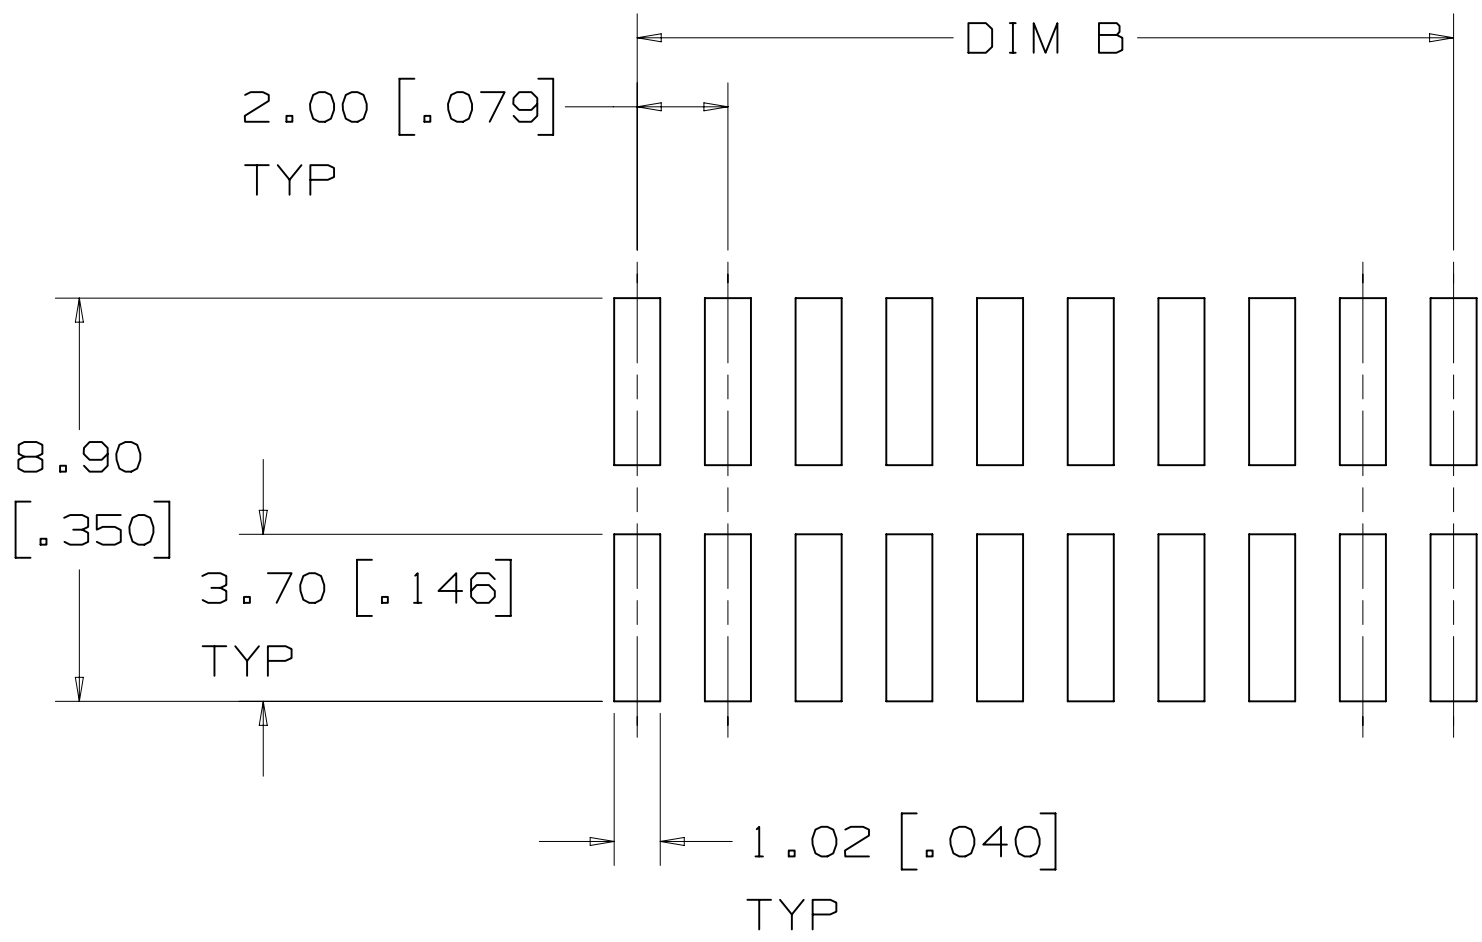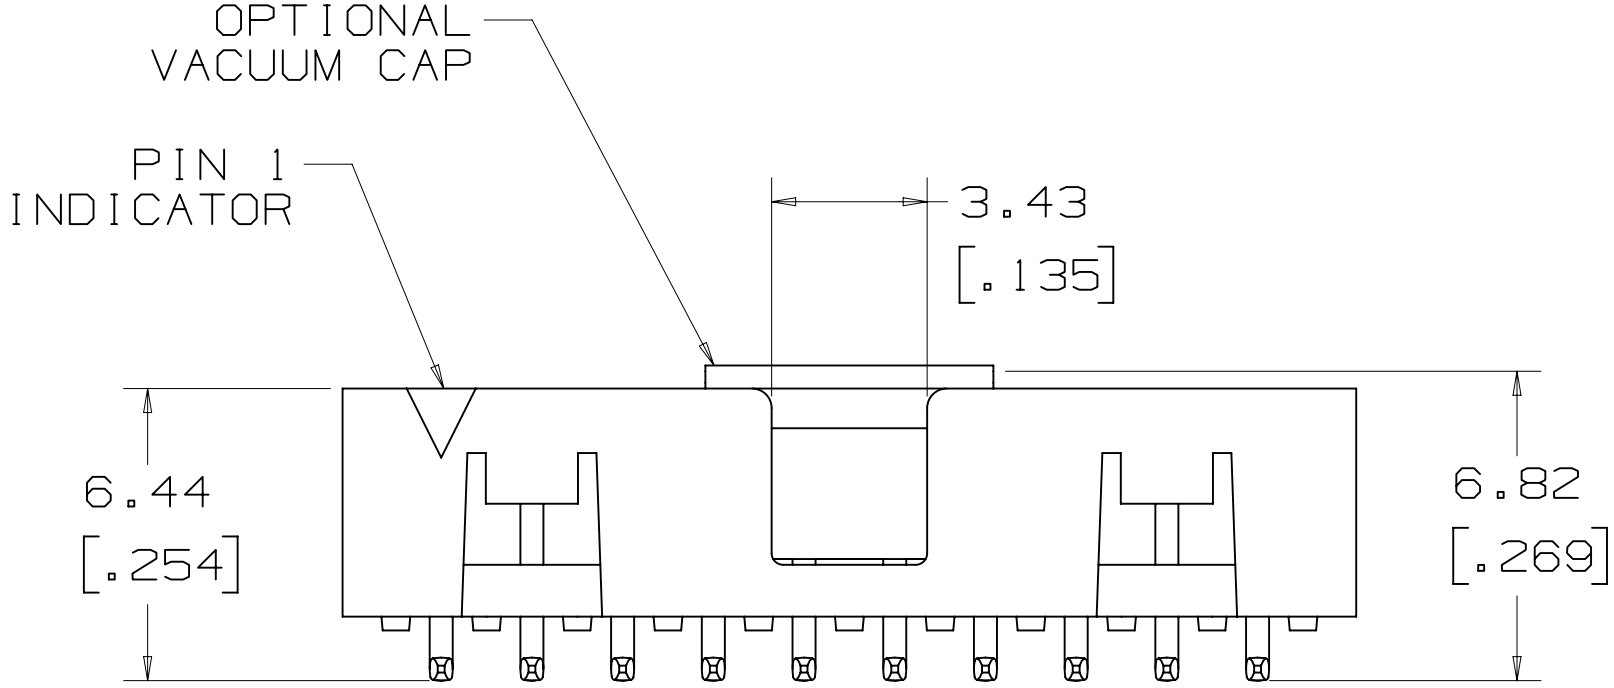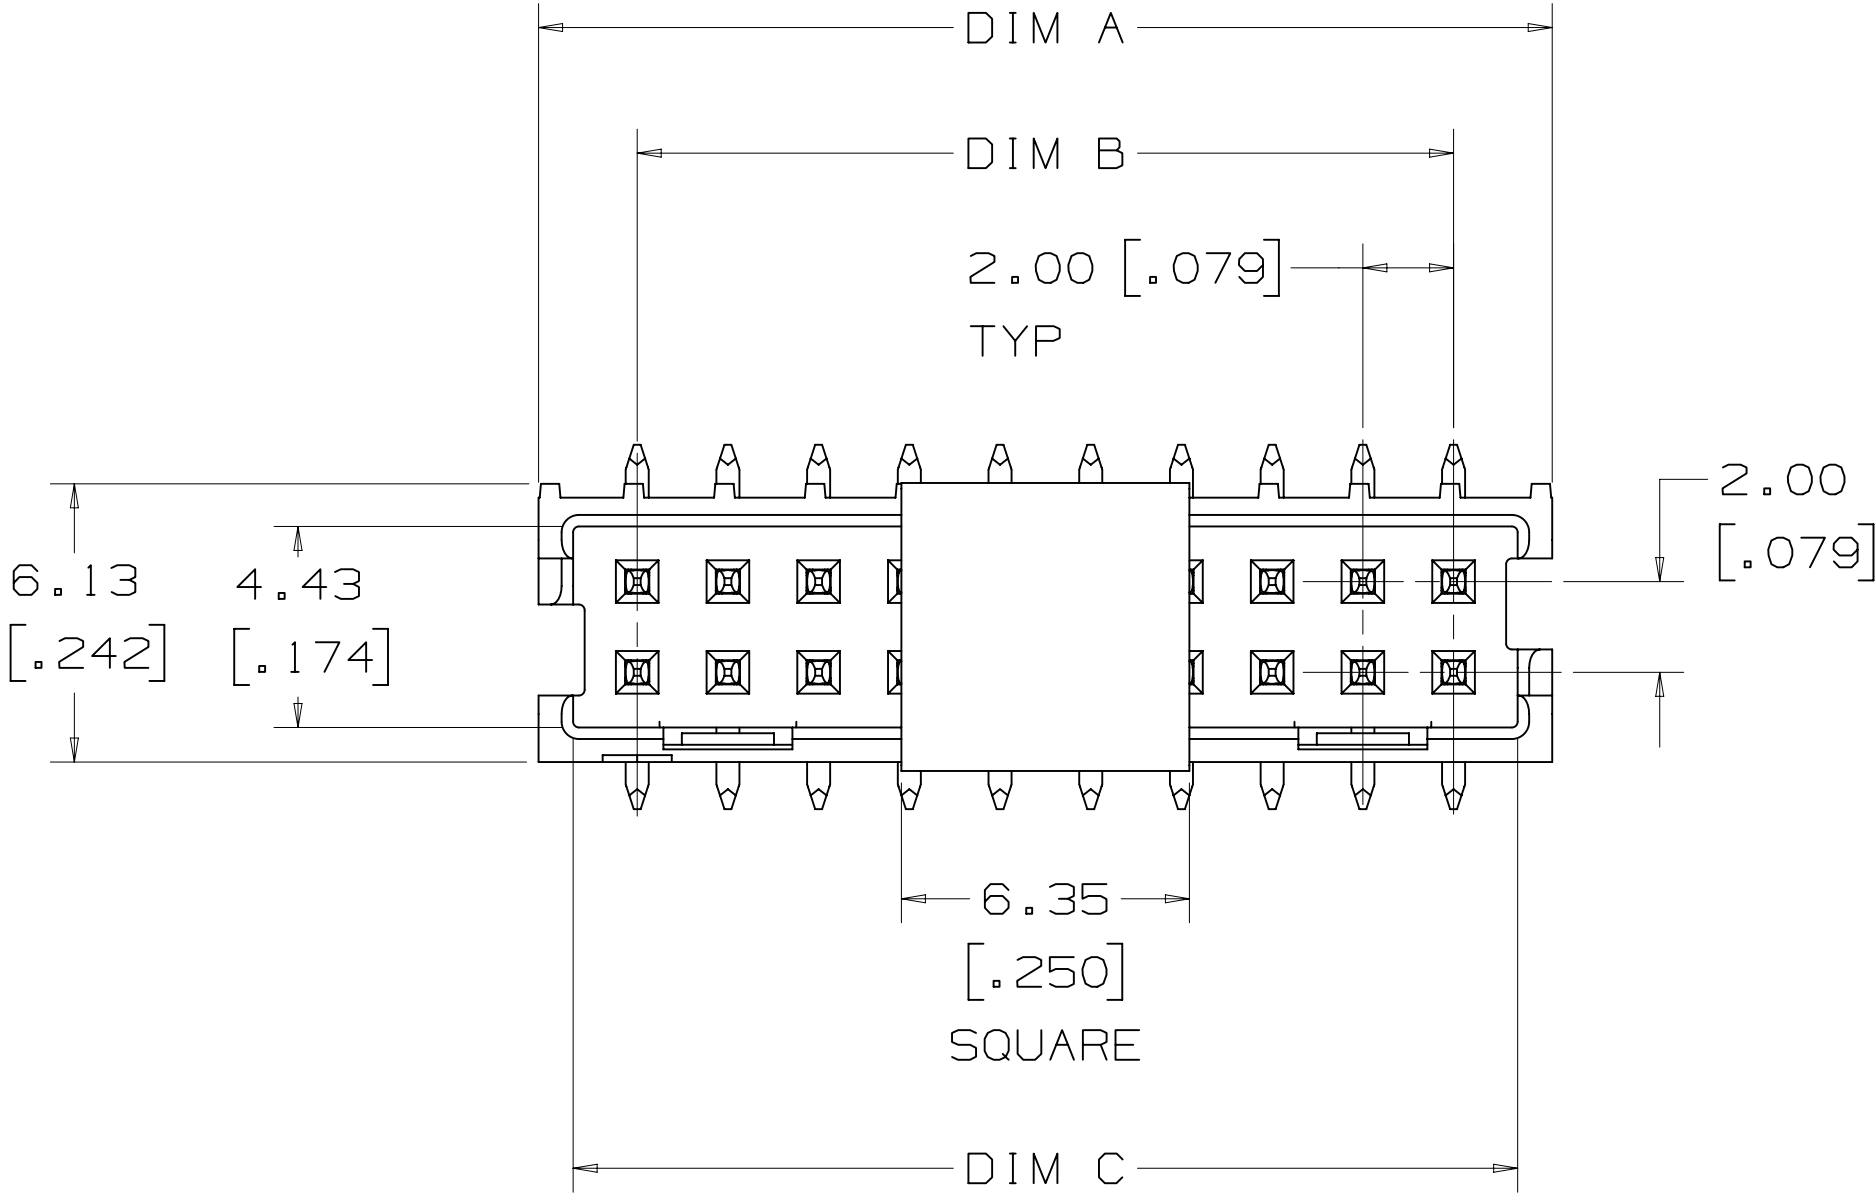


RECOMMENDED PCB PAD PATTERN
TOLERANCE = ±0.08 [0.003]

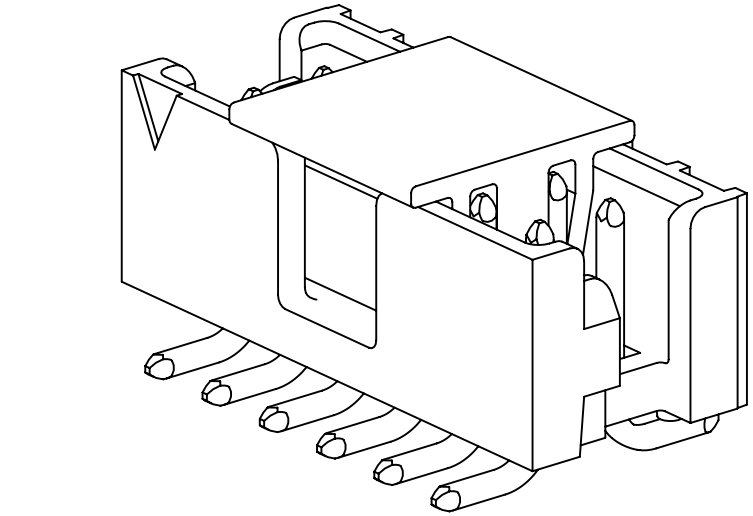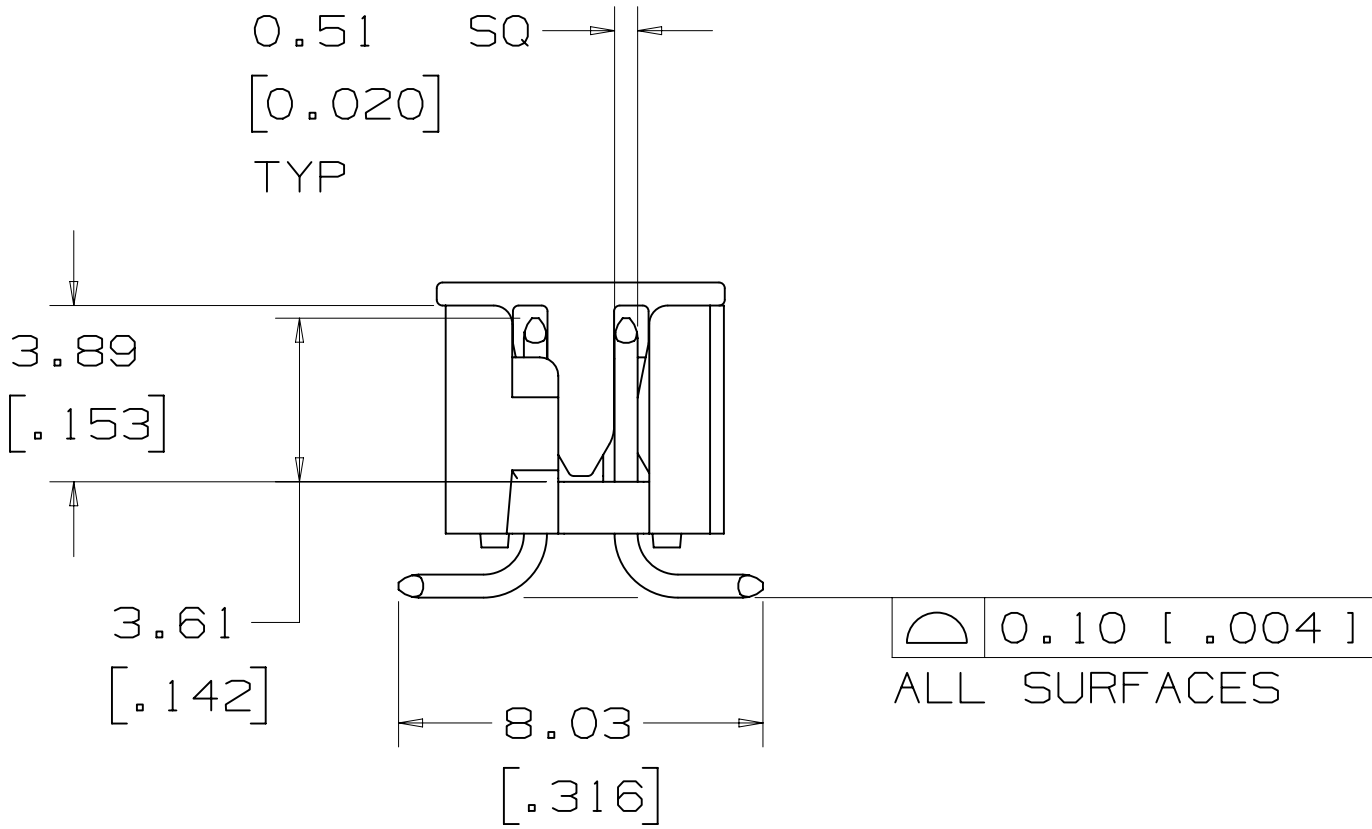

POLARIZATION SLOT
SURFACE MOUNT HEADER
6-12 POSITIONS ONLY

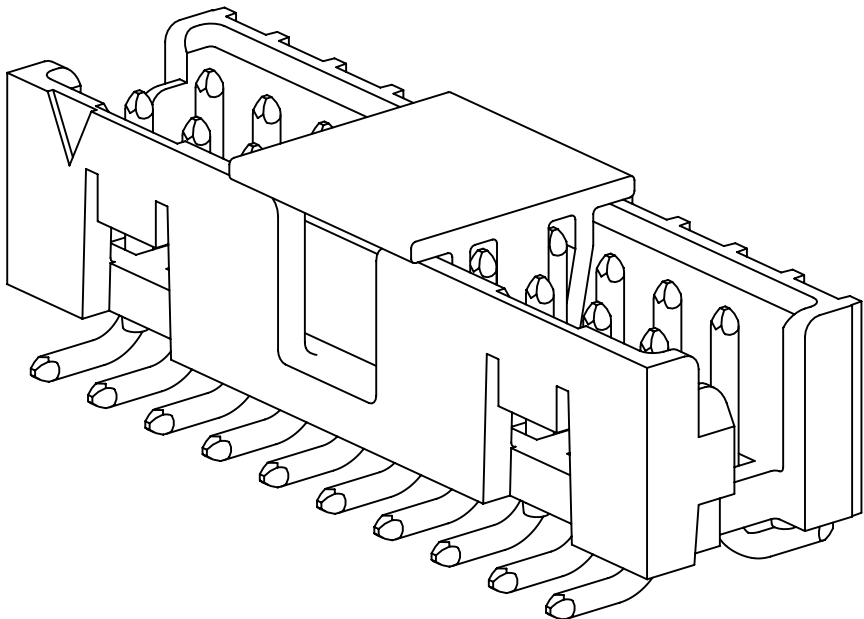

POLARIZATION SLOT AND
DUAL FRICTION LATCHES
SURFACE MOUNT HEADER
14-50 POSITIONS

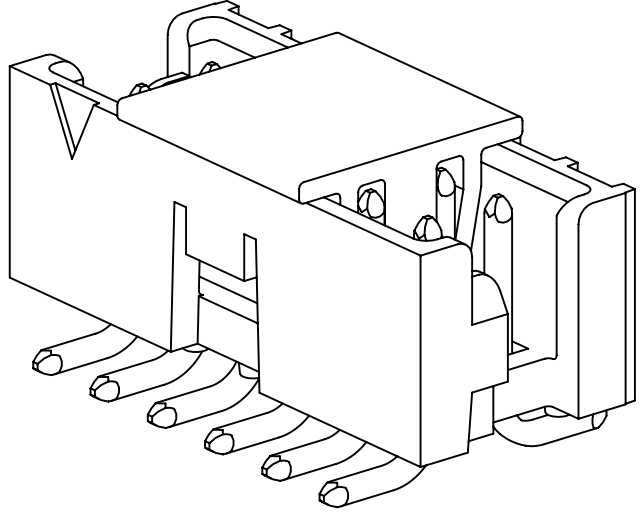

SINGLE FRICTION LATCH
SURFACE MOUNT HEADER
6-12 POSITIONS ONLY


REFERENCE TABLE ON SHEET 5
FOR AVAILABLE POSITIONS

METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTANCE		DISTANCE		L. SCHMIDT		DATE	DATE		
DIVISION		DIVISION CODE		CHKD		DATE	DATE		
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED		INCHES		MILLIMETERS	
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 1994		MAX SURFACE ROUGHNESS		CAGE NUMBER		DRAWING NO.	
125/		ALL SURFACES		0.00 ± 0.13		D 78-5100-2359-7		REV. D	
3		MARKED ONLY		ANGLES ±1°		MODEL		SHT 3 OF 5	


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length 3

STANDARD LENGTH HEADERS
ARE AVAILABLE

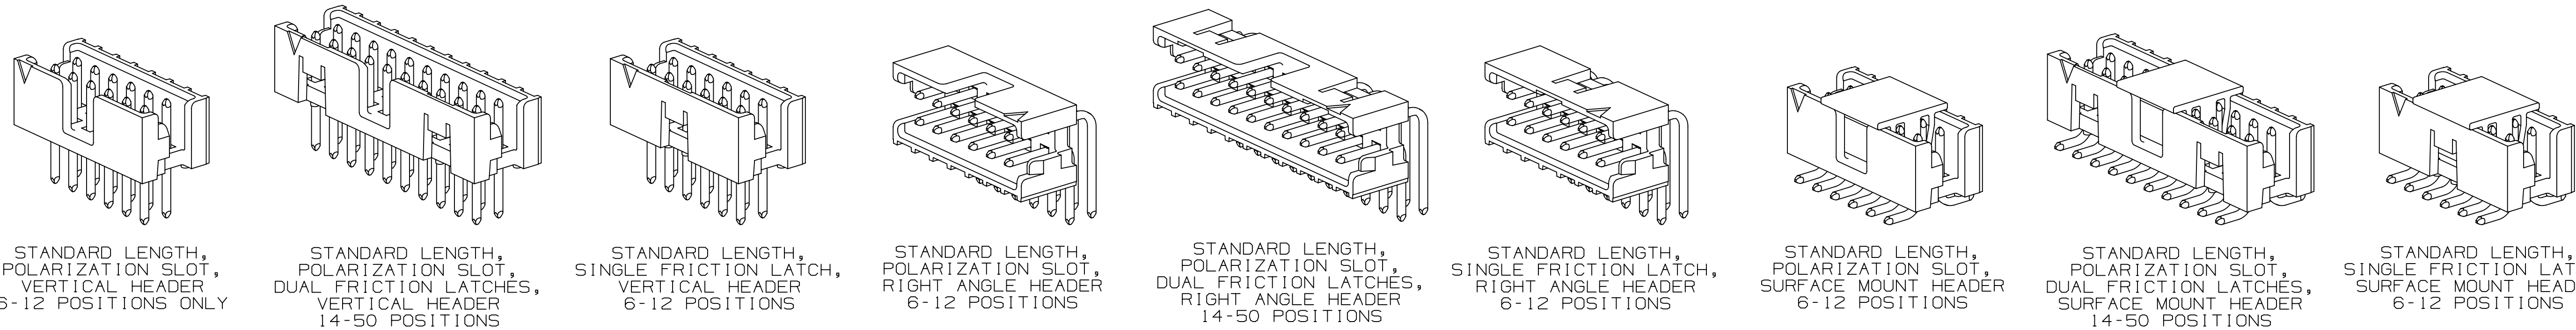

3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Extended Length 4

CALL 3M INTERCONNECT SOLUTIONS
AT 800-225-5373 FOR AVAILABILITY
OF EXTENDED LENGTH HEADERS

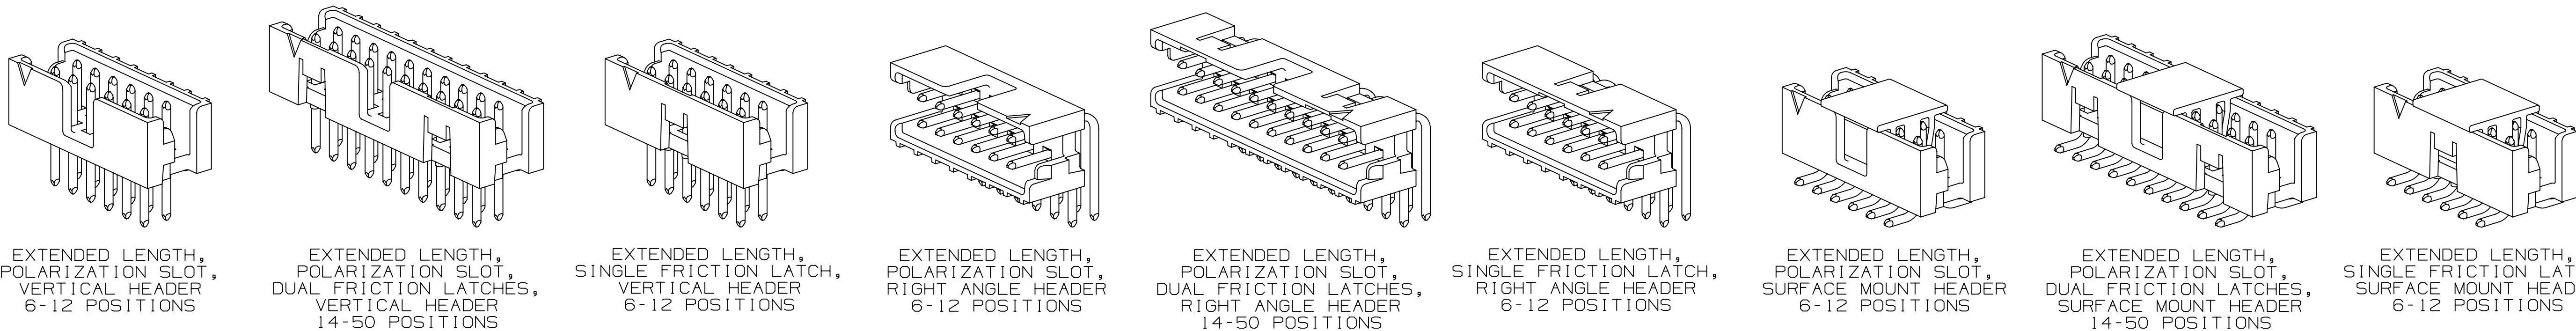

ORDERING INFORMATION

TIER 1 - BEST
1591XX-XXXX

TIER
1 = BEST 0.76 μm
[30 μin] GOLD

POSITION COUNT
(SEE TABLE)

PART CONFIGURATION
2 = VERTICAL SMT
5 = RIGHT ANGLE THRU HOLE
6 = VERTICAL THRU HOLE

BODY LENGTH
0 = STANDARD LENGTH
(MATES TO 158 SERIES)
1 = EXTENDED LENGTH
(MATES TO 870 SERIES)

CONTACT TAIL LENGTH
2 = 2.84 mm [.112]
3 = 3.94 mm [.155]

POLARIZATION/LATCHING
0 = POLARIZATION SLOT AND
DUAL FRICTION LATCHES
(14-50 POSITIONS ONLY)
1 = POLARIZATION SLOT
(6-12 POSITIONS ONLY)
2 = SINGLE FRICTION LATCH
(6-12 POSITIONS ONLY)

TIER 2 - BETTER
1592XX-XXXX

TIER
2 = BETTER 0.38 μm
[15 μin] GOLD

POSITION COUNT
(SEE TABLE)

PART CONFIGURATION
2 = VERTICAL SMT
5 = RIGHT ANGLE THRU HOLE
6 = VERTICAL THRU HOLE

BODY LENGTH
0 = STANDARD LENGTH
(MATES TO 158 SERIES)
1 = EXTENDED LENGTH
(MATES TO 870 SERIES)

CONTACT TAIL LENGTH
2 = 2.84 mm [.112]
3 = 3.94 mm [.155]

POLARIZATION/LATCHING
0 = POLARIZATION SLOT AND
DUAL FRICTION LATCHES
(14-50 POSITIONS ONLY)
1 = POLARIZATION SLOT
(6-12 POSITIONS ONLY)
2 = SINGLE FRICTION LATCH
(6-12 POSITIONS ONLY)

METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTRIBUTION CODES				DRFT	L. SCHMIDT	DATE	JUL 29, 2010	MFG	DATE
				CHKD		DATE		APPROV	DATE
								S. FELDMAN	AUG 09, 2010
DIVISION		DIVISION CODE		© 3M COPYRIGHT 2010					
DO NOT SCALE DRAWING		SCALE 4 1		TOLERANCES EXCEPT AS NOTED		3M 3M Center St. Paul, MN 55144 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
				INCHES					
THIRD ANGLE PROJECTION				MILLIMETERS		TITLE			
INTERPRET PER ASME Y14.5 - 1994				0.00 ± 0.00 ± 0.00 ± 0.000 ±		3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES			
MAX SURFACE ROUGHNESS				0.00 ± 0.00 ±0.13 0.00 ±		CAGE NUMBER		DRAWING NO.	
125/ ☐ ALL SURFACES ☒ MARKED ONLY				ANGLES ± 1°		D 78-5100-2359-7		REV. D	
						MODEL		DET. LISTS ☐ YES ☒ NO SHT 4 OF 4	

3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length

3

 and Extended Length

4

NUMBER OF POSITIONS	SHROUDED BOX HEADER						
	DIM A		DIM B	DIM C		DIM D	
	STANDARD	EXTENDED		STANDARD	EXTENDED		
6	8.35 [.329]	9.52 [.375]	4.00 [.157]	6.83 [.269]	7.99 [.315]	2.84 [.112]	3.94 [.155]
8	10.35 [.407]	11.52 [.453]	6.00 [.236]	8.83 [.347]	9.99 [.393]	2.84 [.112]	3.94 [.155]
10	12.35 [.486]	13.52 [.532]	8.00 [.315]	10.83 [.426]	11.99 [.472]	2.84 [.112]	3.94 [.155]
12	14.35 [.565]	15.52 [.611]	10.00 [.394]	12.83 [.505]	13.99 [.551]	2.84 [.112]	3.94 [.155]
14	16.35 [.644]	17.52 [.690]	12.00 [.472]	14.83 [.584]	15.99 [.630]	2.84 [.112]	3.94 [.155]
16	18.35 [.722]	19.52 [.768]	14.00 [.551]	16.83 [.662]	17.99 [.708]	2.84 [.112]	3.94 [.155]
20	22.35 [.880]	23.52 [.926]	18.00 [.709]	20.83 [.820]	21.99 [.866]	2.84 [.112]	3.94 [.155]
22	24.35 [.959]	25.52 [1.005]	20.00 [.787]	22.83 [.899]	23.99 [.945]	2.84 [.112]	3.94 [.155]
24	26.35 [1.037]	27.52 [1.083]	22.00 [.866]	24.83 [.977]	25.99 [1.023]	2.84 [.112]	3.94 [.155]
26	28.35 [1.116]	29.52 [1.162]	24.00 [.945]	26.83 [1.056]	27.99 [1.102]	2.84 [.112]	3.94 [.155]
30	32.35 [1.274]	33.52 [1.320]	28.00 [1.102]	30.83 [1.214]	31.99 [1.260]	2.84 [.112]	3.94 [.155]
34	36.35 [1.431]	37.52 [1.477]	32.00 [1.260]	34.83 [1.371]	35.99 [1.417]	2.84 [.112]	3.94 [.155]
40	42.35 [1.667]	43.52 [1.713]	38.00 [1.496]	40.83 [1.607]	41.99 [1.653]	2.84 [.112]	3.94 [.155]
44	46.35 [1.825]	47.52 [1.871]	42.00 [1.654]	44.83 [1.765]	45.99 [1.811]	2.84 [.112]	3.94 [.155]
50	52.35 [2.061]	53.52 [2.107]	48.00 [1.890]	50.83 [2.001]	51.99 [2.047]	2.84 [.112]	3.94 [.155]

METRIC [ENGLISH]

D	41488	JUN 20,2012 REVISED CURRENT RATING IN PERFORMANCE TABLE	LDS	SAN
C	39876	APR 18,2012 REMOVED 32 POS FROM TABLE ON SHT 5	LDS	SAN
B	34080	MAY 18,2011 ADDED 6.19 DIM ON SHT 2; REVISED & MOVED TABLE TO SHT 5	LDS	SF
A	30741	OCT 28,2010 INITIAL RELEASE	LDS	SF
REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
DRP	L. SCHMIDT	DATE JUL 29,2010	MFG	DATE
CHKD		DATE	APPR	DATE
			S FELDMAN	AUG 09,2010
DIVISION		DIVISION CODE		
DO NOT SCALE DRAWING	SCALE 1 1	TOLERANCES EXCEPT AS NOTED		
THIRD ANGLE PROJECTION		INCHES .0 .00 .002 .0000		
INTERPRET PER ASME Y14.5 - 1994		MILLIMETERS 0 ± .0 ± .00 ± .000		
MAX SURFACE ROUGHNESS 125 ✓ □ ALL SURFACES ✗ MARKED ONLY		CAGE NUMBER D 78-5100-2359-7		
		DRAWING NO. 78-5100-2359-7		
		REV. D		
		MODEL		
		DET LISTS		
		YES NO		
		SHT 5 OF 5		



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.