
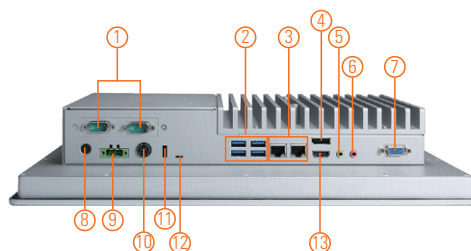
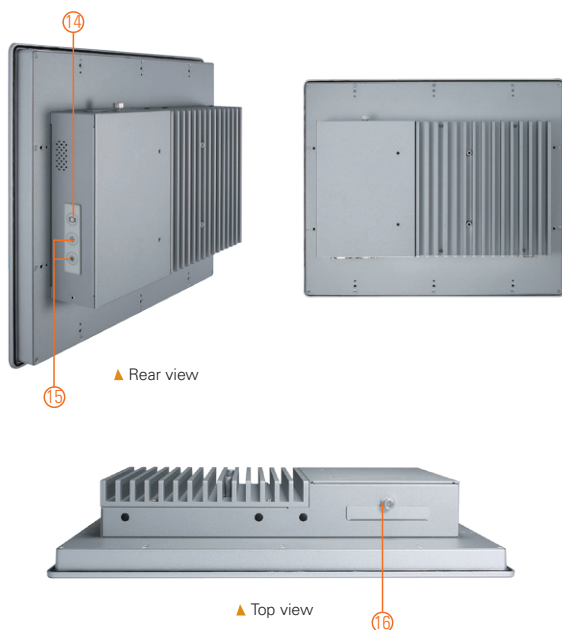


GOT317-502-FR

17" SXGA TFT Expandable Touch Panel Computer with 7th/6th Gen Intel® Core™ i7/i5/i3 Processor (0°C to +40°C)

Features

- 17" SXGA TFT flat resistive touch
- LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3, Celeron® & Pentium® processor
- Intel® H110 chipset
- 4 USB 3.0 and 2 COM
- 2.5" SATA HDD and mSATA
- WLAN module & antenna (optional)
- IP65 front bezel
- Supports panel mount and VESA mount (VESA arm/desktop stand/wall mount optional)
- Built-in speakers and removable hard drive design

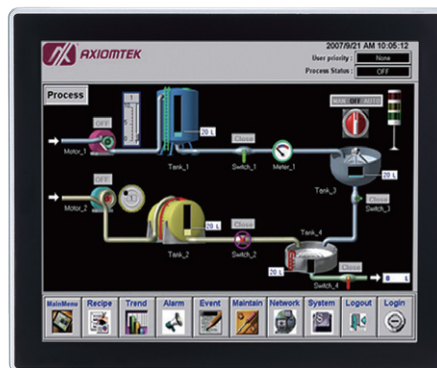

1. 2 x COM (cable)
2. 4 x USB 3.0
3. 2 x LAN
4. 1 x DisplayPort
5. 1 x Line-out
6. 1 x Mic-in
7. 1 x VGA (cable)
8. Power button (ATX)
9. Terminal block for DC power input
10. Power input connector
11. Remote power switch port
12. AT/ATX selectable switch
13. 1 x HDMI
14. Backlight switch
15. Brightness adjust +/-
16. Swappable HDD



Introduction

The GOT317-502-FR is a multimedia 17" SXGA touch panel PC for kiosk application. It has a fashionable mechanism design and industrial-grade front bezel which can avoid damage from chemical corrosion. To meet the demands of multimedia application, the GOT317-502-FR is powered by the high performance LGA1151 socket 7th/6th generation Intel® Core™ processor with the Intel® H110 chipset. It features two COM ports, two Gigabit Ethernet and up to 32GB memory of dual-channel DDR4-2400. The industrial touch panel PC is suitable for kiosk and factory automation.

Removable hard drive design

The GOT317-502-FR has designed with removable HDD. User can easily plug in standard 2.5" HDD based on any application needs.

Speaker and WLAN Antenna Supported

The GOT317-502-FR features built-in speakers for kiosk application to display multimedia content. It also supports WLAN module antenna (optional) for wireless network connectivity.

Specifications

Front Bezel	Aluminum w/ IP65/NEMA 4 rugged protection
LCD Panel	Display Type 17" SXGA TFT LCD
	Brightness 350 nits
	Resolution 1280 x 1024 pixels
	Viewing Angle 160°/140°
Main System	CPU LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3, Celeron® & Pentium® processor
	Chipset Intel® H110
	System Memory 2 x 260-pin DDR4-2400 SO-DIMM, up to 32GB
	BIOS AMI UEFI BIOS
	Storage 1 x 2.5" SATA HDD
	Drive N/A
	Watchdog Timer 255 levels, 1 to 255 sec.


Specifications

IO Connector	2 x RS-232/422/485 1 x HDMI v1.4 1 x VGA (up to 1920 x 1200 60Hz) 1 x DisplayPort v1.2 (DP++) 4 x USB 3.0 2 x 10/100/1000 Mbps Ethernet 1 x Audio (Mic-in/Line-out)
Expansion Interface	1 x Half-size PCI Express Mini Card slot (mPCIe 1) 1 x Full-size PCI Express Mini Card slot (mSATA_mPCIe 2)
Touchscreen	5-wire flat resistive touch
Power Supply	DC terminal block: +12V/+19V/+24V AC adapter: 19V, 6.32A
Power Consumption	120W (include 35W processor)
Dimensions	398.02 mm (15.67") (W) x 77.5 mm (3.05") (D) x 330.44 mm (13.01") (H)
Packing Dimension	510 mm (20.08") (W) x 190 mm (7.48") (D) x 540 mm (21.26") (H)
Weight (net/gross)	6.7 kg (14.77 lb)/9.0 kg (19.84 lb)
Environment	Operating temperature: 0°C to +40°C (+32°F to +104°F) Relative humidity: 10% to 90% @ +40°C, non-considering Operating vibration: 1.0G, 5 to 500Hz, random
Certificate	CE

Packing List

1 x GOT317-502
1 x Driver CD
1 x Phoenix connector
1 x Panel mount kit (by model)
1 x Adapter (by model)

Dimensions

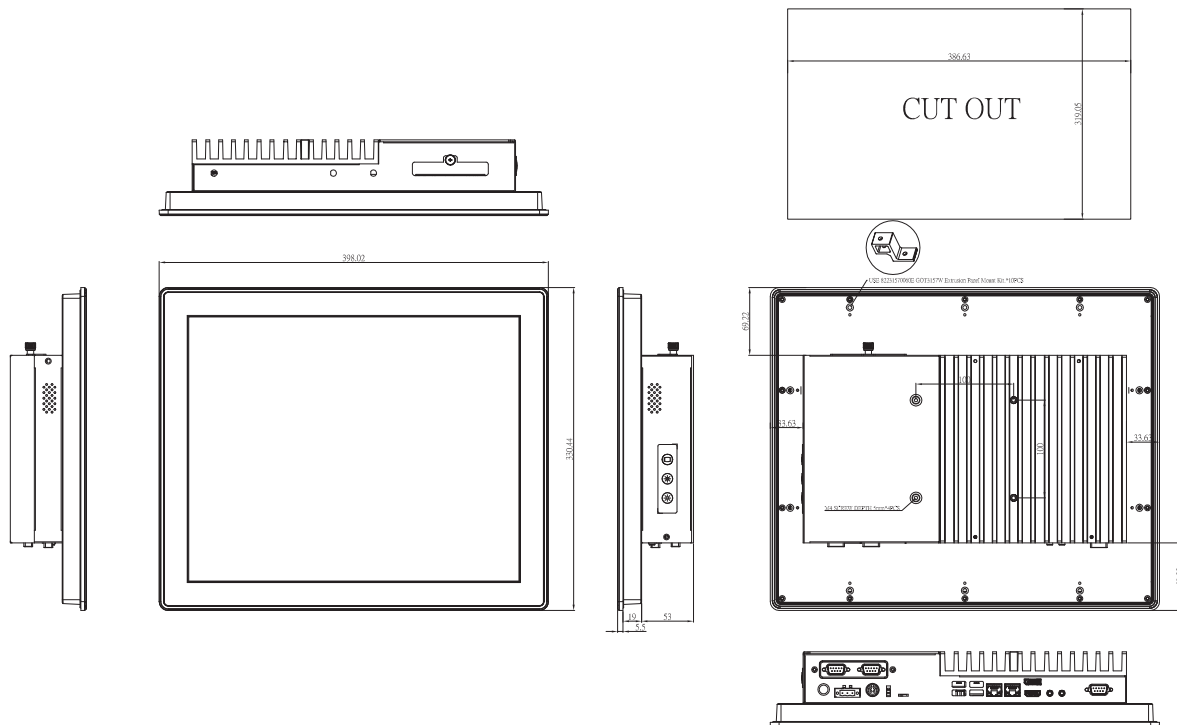

Ordering Information

GOT317-502-FR With Adapter and Panel Mount Kit	17" SXGA TFT fanless touch panel computer with LGA1151 socket 7th/6th gen Intel® Core™, Pentium®, Celeron® processor, 5-wire flat resistive touch screen and 12/19/24 VDC terminal block connector
GOT317-502-FR-DC With Adapter and Panel Mount Kit	21.5" FHD TFT fanless multi-touch panel computer with LGA1151 socket 7th/6th gen Intel® Core™, Pentium®, Celeron® processor, 10-point projected capacitive multi-touch screen and 12/19/24 VDC terminal block connector

* Specification and certifications are based on requirements and may vary.

Optional Accessories

82231770050E	GOT3177T-834 wall mount kit
50904D24010E	AC adapter 120W 19V/6.32A, FSP120-ABAN3
82261510190E	P6151 panel mount kit SFP

Optional OS Installation

Windows® 7 32/64-bit, Windows® 8.1 64-bit, Windows® 10 64-bit (Sky Lake)
Windows® 10 64-bit (Kaby Lake)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.