



# TXPS-141XT-M12 Series

**EN50155 5-port unmanaged PoE Ethernet switch with 4x10/100/500Base-T(X) P.S.E. and 1x10/100/500Base-T(X), M12 connector**

## Features

- Supports 4 x 10/100/500 Base-T(X) with P.S.E. PoE ports
- 4 port **P.S.E.** fully compliant with IEEE802.3at standard, provide up to 30 Watts per port
- Support auto-negotiation and auto-MDI/MDI-X
- Support store and forward transmission
- Support flow control
- Support broadcast storm protection
- Ultra-rugged enclosure M12 connector for toughest industrial usages
- Wall mounting enabled




## Introduction

ORing's Transporter™ series Ethernet switches are designed for industrial applications, such as rolling stock, vehicle, and railway applications. TXPS-141XT-M12 series are unmanaged PoE Ethernet switch with 4x10/100/500Base-T(X) P.S.E. ports and 1x10/100/500Base-T(X) port which is compliant with EN50155 requirement. It is specifically designed for the toughest industrial environments. TXPS-141XT-M12 series EN50155 Ethernet switch use M12 connectors to ensure tight, robust connections, and guarantee reliable operation against environmental disturbances, such as vibration and shock. TXPS-141XT-M12 series also support Power over Ethernet, a system to transmit electrical power up to **30 watts**, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. TXPS-141XT-M12 series switch has 4x10/100/500Base-T(X) P.S.E. (Power Sourcing Equipment) port to provide power in a PoE setup. The very wide operating temperature range from -40 °C to 75°C can satisfy most operating environment.


### Practical Operation

TXPS-141XT-M12 series can be used in connecting several Ethernet devices which need to operated under harsh environment requirement. The designs of rugged housing and wide operating temperature range from -40 ~ 75°C, makes TXPS-141XT-M12 series reliably in any kinds of transporter applications.

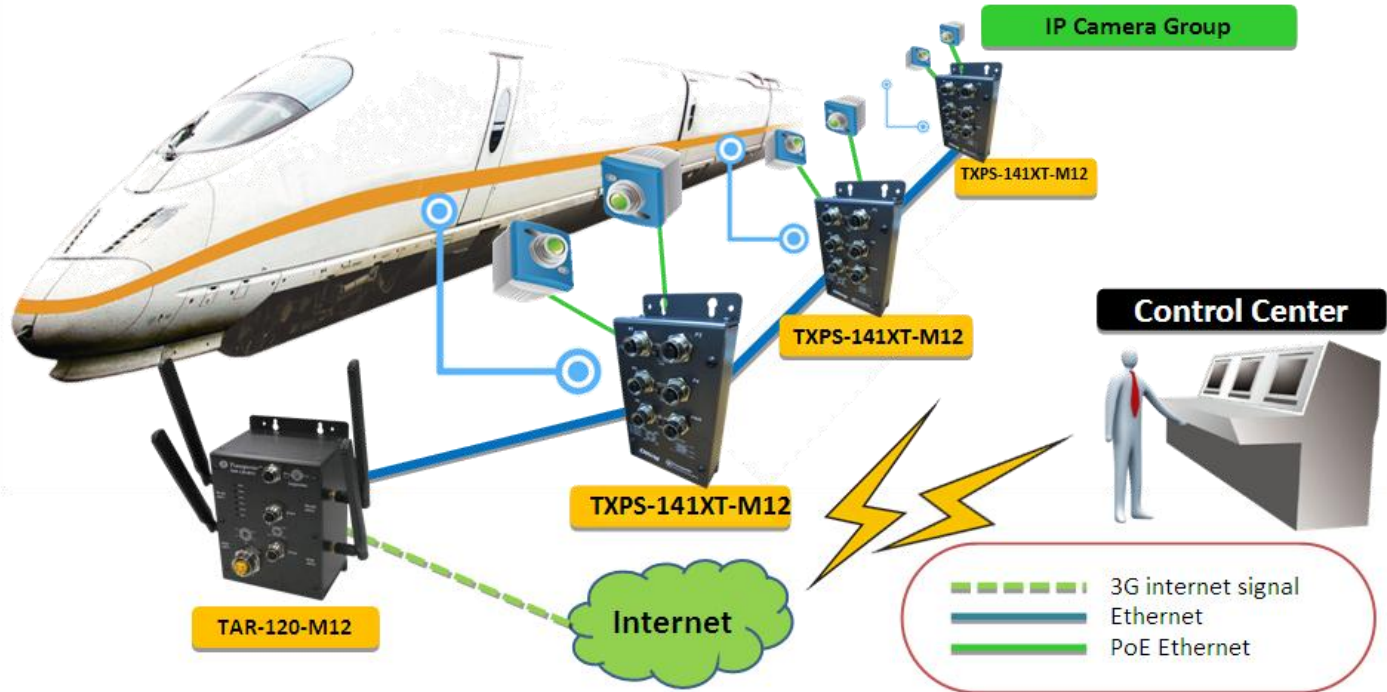


### Dimension

Dimension (Unit =mm)

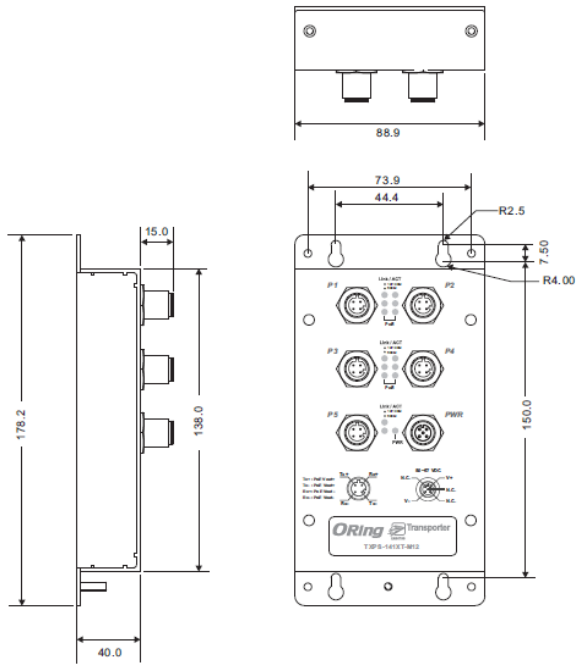


TXPS-141XT-M12

Dimension (Unit =mm)

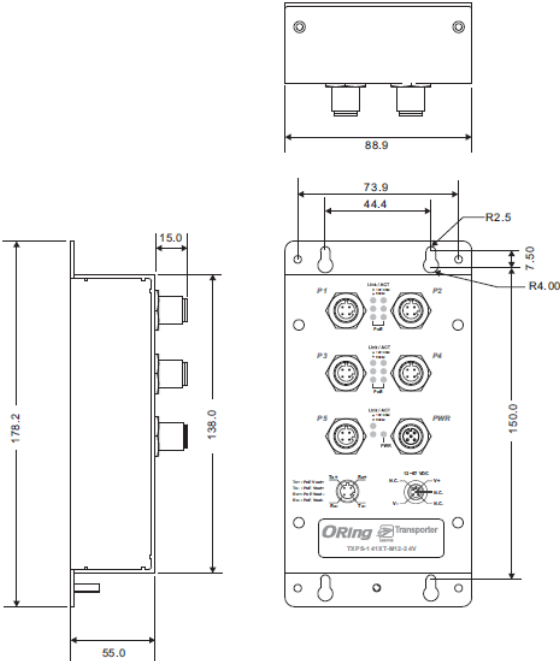

TXPS-141XT-M12-24V/MV

Pin Definition

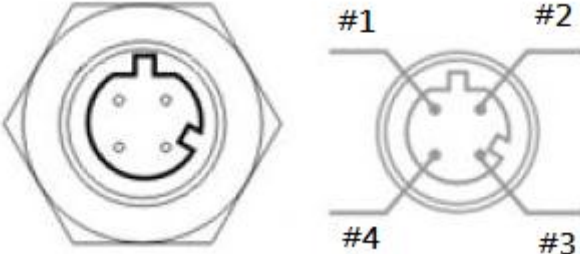

M12 D-coding Pin Definition	
Pin No.	Description
#1	TX+ with PoE Vout+
#2	RX+ with PoE Vout-
#3	TX- with PoE Vout+
#4	RX- with PoE Vout-

\* All specifications are subject to change without notice.

## Specifications

ORing Switch Model	TXPS-141XT-M12	TXPS-141XT-M12-24V	TXPS-141XT-M12-MV
<b>Physical Ports</b>			
10/100/500Base-T(X) with P.S.E. Ports in M12 Auto MDI/MDIX	<b>4 x M12 connector (4-pin M12 D-coding)</b>		
10/100/500Base-T(X) Port in M12 Auto MDI/MDIX	<b>1 x M12 connector (4-pin M12 D-coding)</b>		
<b>Technology</b>			
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3x for Flow control IEEE 802.3at PoE specification (up to 30 Watts per port for P.S.E.)		
Processing	Store-and-Forward		
<b>LED indicators</b>			
Power indicator	Green : Power LED x 1		
10/100/500Base-T(X) M12 port with P.S.E. indicator	Top Green for port Link/Act at 10/100Mbps Middle Green for port Link/Act at 500Mbps Bottom Blue for PoE indicator		
10/100/500Base-T(X) M12 port indicator	Top Green for port Link/Act at 10/100Mbps Bottom Green for port Link/Act at 500Mbps		
<b>Power</b>			
Input Power	50 ~ 57VDC power input on M12 connector (5-pin M12 A-coding)	12~57VDC power input on M12 connector (5-pin M12 A-coding)	72~110VDC power input on M12 connector (5-pin M12 A-coding)
Power Consumption (Typ.)	1 Watts	2 Watts	5 Watts
PoE Output Power	120 Watts	60 Watts (12~24VDC) / 120 Watts (24~57VDC)	60 Watts
Overload Current Protection	Present		
Reverse Polarity Protection	Present		
<b>Physical Characteristic</b>			
Enclosure	IP-40		
Dimension (W x D x H)	88.9 x 40 x 178.2 mm	88.9 x 55 x 178.2 mm	88.9 x 55 x 178.2 mm
Weight (g)	511	643	771
<b>Environmental</b>			
Storage Temperature	-40 to 85°C (-40 to 185°F)		
Operating Temperature	-40 to 75°C (-40 to 167°F)		
Operating Humidity	5% to 95% Non-condensing		
<b>Regulatory approvals</b>			
EMI	FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2, EN55011, EN50121-4)		
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11		
Shock	IEC60068-2-27, EN61373		
Free Fall	IEC60068-2-32		
Vibration	IEC60068-2-6, EN61373		
Safety	EN60950-1		
<b>Warranty</b>	5 years		

## Ordering Information

### TXPS-141XT-M12

<b>Code</b>	10/100/500Base-T(X) P.S.E.	
<b>Definition</b>	Port Number	Additional Port Number with 10/100/500Base-T(X)
<b>Option</b>	- 4: 4 ports	- 1: 1 port
<b>Available Model</b>	<b>Model Name</b>	<b>Description</b>
	TXPS-141XT-M12	EN50155 5-port unmanaged PoE Ethernet switch with 4x10/100/500Base-T(X) P.S.E. and 1x10/100/500Base-T(X), M12 connector
	TXPS-141XT-M12-24V	EN50155 5-port unmanaged PoE Ethernet switch with 4x10/100/500Base-T(X) P.S.E. and 1x10/100/500Base-T(X), M12 connector, 24VDC power input
	TXPS-141XT-M12-MV	EN50155 5-port unmanaged PoE Ethernet switch with 4x10/100/500Base-T(X) P.S.E. and 1x10/100/500Base-T(X), M12 connector, 110VDC power input

## Packing List

- TXPS-141XT-M12 series x 1
- Quick Installation Guide x 1

## Optional Accessories

- M12 cable series



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.