

1N5913B THRU 1N5956B

SILICON ZENER DIODE
1.5 WATT, 3.3 THRU 200 VOLTS



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 1N5913B series silicon Zener diode is a high quality voltage regulator designed for use in automotive, industrial, commercial, entertainment and computer applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS:

Power Dissipation ($T_L=75^\circ\text{C}$)

Operating and Storage Temperature

V_Z Tolerance: Part number with "B" suffix

V_Z Tolerance: Part number with "C" suffix

V_Z Tolerance: Part number with "D" suffix

SYMBOL

P_D

T_J, T_{stg}

1.5

-65 to +200

± 5

± 2

± 1

UNITS

W

$^\circ\text{C}$

%


%

%

ELECTRICAL CHARACTERISTICS: ($T_L=30^\circ\text{C}$) $V_F=1.5\text{V MAX @ } I_F=200\text{mA}$ (for all types)

TYPE	ZENER VOLTAGE $V_Z @ I_{ZT}$			TEST CURRENT	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAXIMUM DC CURRENT
	MIN	NOM	MAX	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$		I_{ZM}
	V	V	V	mA	Ω	Ω	mA	μA	V	mA
1N5913B	3.135	3.3	3.465	113.6	10	500	1.0	100	1.0	454
1N5914B	3.420	3.6	3.780	104.2	9.0	500	1.0	75	1.0	416
1N5915B	3.705	3.9	4.095	96.1	7.5	500	1.0	25	1.0	384
1N5916B	4.085	4.3	4.515	87.2	6.0	500	1.0	5.0	1.0	348
1N5917B	4.465	4.7	4.935	79.8	5.0	500	1.0	5.0	1.5	319
1N5918B	4.845	5.1	5.355	73.5	4.0	350	1.0	5.0	2.0	294
1N5919B	5.320	5.6	5.880	66.9	2.0	250	1.0	5.0	3.0	267
1N5920B	5.890	6.2	6.510	60.5	2.0	200	1.0	5.0	4.0	241
1N5921B	6.460	6.8	7.140	55.1	3.0	200	1.0	5.0	5.2	220
1N5922B	7.130	7.5	7.880	50	3.0	400	0.5	5.0	6.0	200
1N5923B	7.790	8.2	8.610	45.7	4.0	400	0.5	5.0	6.5	182
1N5924B	8.650	9.1	9.560	41.2	4.0	500	0.5	5.0	7.0	164
1N5925B	9.500	10	10.50	37.5	5.0	500	0.25	5.0	8.0	150
1N5926B	10.45	11	11.55	34.1	6.0	550	0.25	1.0	8.4	136
1N5927B	11.40	12	12.60	31.2	7.0	550	0.25	1.0	9.1	125
1N5928B	12.35	13	13.65	28.8	7.0	550	0.25	1.0	9.9	115
1N5929B	14.25	15	15.75	25	9.0	600	0.25	1.0	11.4	100
1N5930B	15.20	16	16.80	23.4	10	600	0.25	1.0	12.2	93
1N5931B	17.10	18	18.90	20.8	12	650	0.25	1.0	13.7	83
1N5932B	19.00	20	21.00	18.7	14	650	0.25	1.0	15.2	75
1N5933B	20.90	22	23.10	17	18	650	0.25	1.0	16.7	68

R3 (8-March 2012)

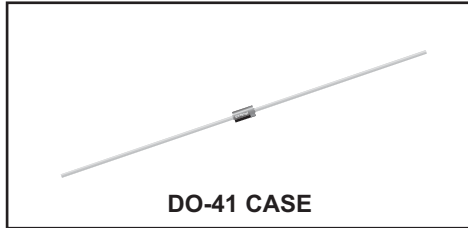

1N5913B THRU 1N5956B


**SILICON ZENER DIODE
1.5 WATT, 3.3 THRU 200 VOLTS**



ELECTRICAL CHARACTERISTICS - Continued: ($T_L=30^\circ\text{C}$) $V_F=1.5\text{V MAX @ } I_F=200\text{mA}$ (for all types)

TYPE	ZENER VOLTAGE $V_Z @ I_{ZT}$			TEST CURRENT	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAXIMUM DC CURRENT
	MIN	NOM	MAX	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$		
	V	V	V	mA	Ω	Ω	mA	μA	V	mA
1N5934B	22.80	24	25.20	15.6	19	700	0.25	1.0	18.2	62
1N5935B	25.65	27	28.35	13.9	23	700	0.25	1.0	20.6	55
1N5936B	28.50	30	31.50	12.5	26	750	0.25	1.0	22.8	50
1N5937B	31.35	33	34.65	11.4	33	800	0.25	1.0	25.1	45
1N5938B	34.20	36	37.80	10.4	38	850	0.25	1.0	27.4	41
1N5939B	37.05	39	40.95	9.6	45	900	0.25	1.0	29.7	38
1N5940B	40.85	43	45.15	8.7	53	950	0.25	1.0	32.7	34
1N5941B	44.65	47	49.35	8.0	67	1000	0.25	1.0	35.8	31
1N5942B	48.45	51	53.55	7.3	70	1100	0.25	1.0	38.8	29
1N5943B	53.20	56	58.80	6.7	86	1300	0.25	1.0	42.6	26
1N5944B	58.90	62	65.10	6.0	100	1500	0.25	1.0	47.1	24
1N5945B	64.60	68	71.40	5.5	120	1700	0.25	1.0	51.2	22
1N5946B	71.25	75	78.75	5.0	140	2000	0.25	1.0	56.0	20
1N5947B	77.90	82	86.10	4.6	160	2500	0.25	1.0	62.2	18
1N5948B	86.45	91	95.55	4.1	200	3000	0.25	1.0	69.2	16
1N5949B	95.00	100	105.0	3.7	250	3100	0.25	1.0	76.0	15
1N5950B	104.5	110	115.5	3.4	300	4000	0.25	1.0	83.6	13
1N5951B	114.0	120	126.0	3.1	380	4500	0.25	1.0	91.2	12
1N5952B	123.5	130	136.5	2.9	450	5000	0.25	1.0	98.8	11
1N5953B	142.5	150	157.5	2.5	600	6000	0.25	1.0	114.0	10
1N5954B	152.0	160	168.0	2.3	700	6500	0.25	1.0	121.6	9.0
1N5955B	171.0	180	189.0	2.1	900	7000	0.25	1.0	136.8	8.0
1N5956B	190.0	200	210.0	1.9	1200	8000	0.25	1.0	152.0	7.0

DO-41 CASE - MECHANICAL OUTLINE

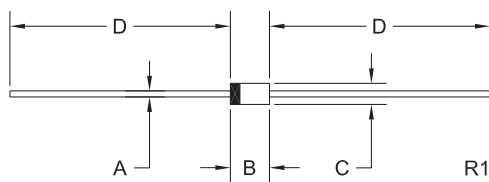

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.028	0.034	0.71	0.86
B	0.160	0.205	4.06	5.21
C	0.080	0.107	2.03	2.72
D	1.000	-	25.40	-

DO-41 (REV: R1)

R3 (8-March 2012)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.