

IGS-P9164 Series



► **Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch**

Features

- Designed for power substation / Railway application and fully compliant with the requirement of IEC 61850-3 and IEEE 1613
- Support **O-Ring** (recovery time < 30ms over 250 units of connection) and MSTP(RSTP/STP compatible) for Ethernet Redundancy
- **Open-Ring** support the other vendor's ring technology in open architecture
- **O-Chain** allow multiple redundant network rings
- Support standard IEC 62439-2 **MRP*NOTE** (Media Redundancy Protocol) function
- Support IEEE 1588v2 clock Synchronization
- Support IPV6 new internet protocol version
- Support Modbus TCP protocol
- Provided HTTPS/SSH protocol to enhance network security
- Support IEEE 802.3az **Energy-Efficient Ethernet** technology
- Support SMTP client and NTP server protocol
- Support IP-based bandwidth management
- Support application-based QoS management
- Support Device Binding security function
- Support DOS/DDOS auto prevention
- IGMP v2/v3 (IGMP snooping support) for filtering multicast traffic
- Support SNMP v1/v2c/v3 & RMON & 802.1Q VLAN Network Management
- Support ACL, TACACS+ and 802.1x User Authentication for security
- Support 9.6K Bytes Jumbo Frame
- Support DBU-01 backup unit to quickly backup/restore configuration
- Multiple notification for warning of unexpected event
- Support **DBU-01** backup unit device to quickly backup/restore configuration
- Web-based ,Telnet, Console (CLI), and Windows utility (**Open-Vision**) configuration
- Support LLDP Protocol
- Rigid IP-30 housing design
- DIN-Rail and wall mounting enabled




Introduction

IGS-P9164 series are IEC 61850-3 managed redundant ring Ethernet switches. These switches are designed for power substation application and rolling stock application, fully compliant with the requirement of IEC 61850-3 and IEEE 1613. **IGS-P9164GF** series are IEC 61850-3 managed redundant ring Ethernet switch with 16x10/100/1000Base-T(X) ports and 4x1000Base-X optical fiber port with SC connector. **IGS-P9164FX** series are IEC 61850-3 managed redundant ring Ethernet switch with 16x10/100/1000Base-T(X) ports and 4x100Base-FX optical fiber port with SC connector. **IGS-P9164GC** series are IEC 61850-3 managed redundant ring Ethernet switch with 16x10/100/1000Base-T(X) ports and 4xGigabit combo ports with SFP socket. With completely support of Ethernet Redundancy protocol, **O-Ring** (recovery time < 30ms over 250 units of connection) and MSTP (RSTP/STP compatible) can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. And support wide operating temperature from -40°C to 85°C. IGS-P9164GX series can also be managed centralized and convenient by Open-Vision. Except the Web-based interface, Telnet and console (CLI) configuration. Therefore, the switch is one of the most reliable choice for highly-managed and Fiber Ethernet application.


*NOTE: This function is available by request only

- **O-Ring** : O-Ring is ORing's proprietary redundant ring technology, with recovery time of less 30 milliseconds and up to 250 nodes. The O-Ring redundant ring technology can protect mission-critical application from network interruptions or temporary malfunction with its fast recover technology.
- **Open-Ring** : Open-Ring is an enhanced redundant technology that makes ORing's switches compatible with other vendor's proprietary redundant ring technologies. It enables ORing's switches to form a single ring with other vendor's switch. In cases where the ring is setup using proprietary technology, ORing offers a compatibility service where ORing can make its switches compatible with your particular network requirements.
- **O-Chain** : O-Chain is the revolutionary network redundancy technology that provides the add-on network redundancy topology for any backbone network, O-Chain allows multiple redundant network rings of different redundancy protocols to join and function together as a larger and more robust compound network topology. O-Chain providing ease-of-use while maximizing fault-recovery swiftness, flexibility, compatibility, and cost-effectiveness in one set of network redundancy topology.
- **MRP : Media Redundancy Protocol (MRP^{*NOTE})** is a data network protocol standardized by the IEC 62439-2. It allows rings of Ethernet switches to overcome any single failure with recovery time much faster than achievable with Spanning Tree Protocol.
- **IP-based Bandwidth Management** : The switch provide advanced IP-based bandwidth management which can limit the maximum bandwidth for each IP device. User can configure IP camera and NVR with more bandwidth and limit other device bandwidth.
- **Application-Based QoS** : The switch also support application-based QoS. Application-based QoS can set highest priority for data stream according to TCP/UDP port number.
- **Device Binding Function** : ORing special Device Binding function can only permit allowed IP address with MAC address to access the network. Hacker cannot access the IP surveillance network without permission. It can avoid hacker from stealing video privacy data and attacking IP camera, NVR and controllers.
- **Advanced DOS/DDOS Auto Prevention** : The switch also provided advanced DOS/DDOS auto prevention. If there is any IP flow become big in short time, the switch will lock the source IP address for certain time to prevent the attack. It's hardware based prevention so it can prevent DOS/DDOS attack immediately and completely.
- **IEEE 1588 Technology** : The IEEE 1588 technology can fulfill precision time synchronization requirements for protection and control applications.
- **Modbus TCP** : This is a Modbus variant used for communications over TCP/IP networks.
- **IEEE 802.3az Energy-Efficient Ethernet** : This is a set of enhancements to the twisted-pair and backplane Ethernet family of networking standards that will allow for less power consumption during periods of low data activity. The intention was to reduce power consumption by 50% or more.

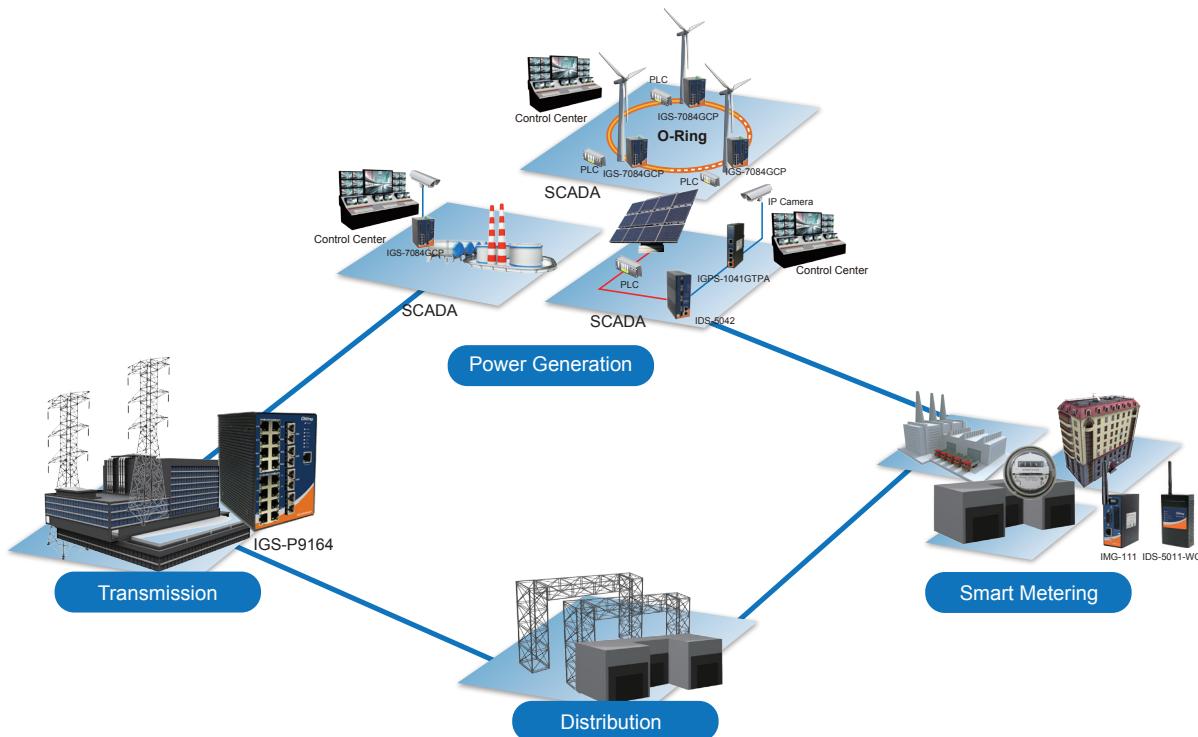

^{*NOTE: This function is available by request only}


Dimensions

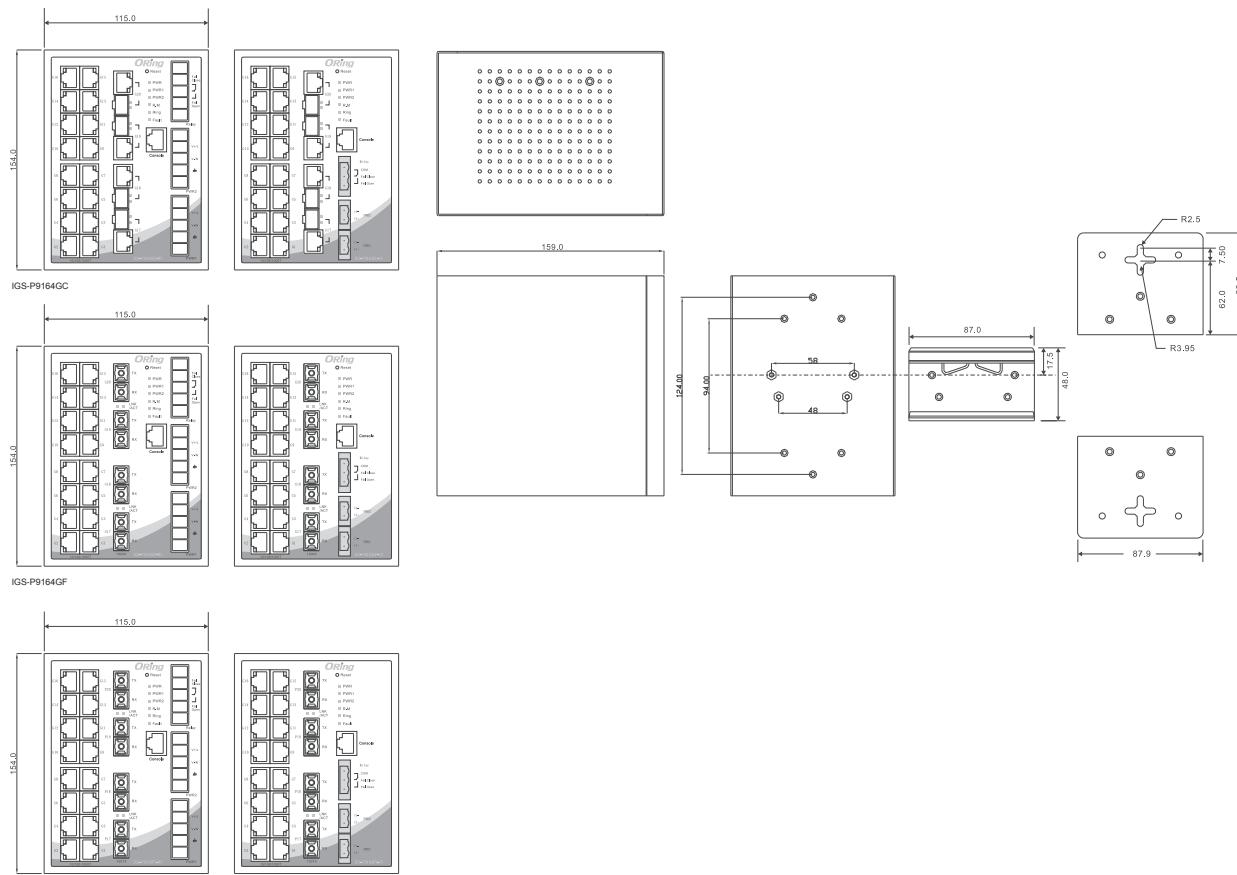


(Unit=mm)

Open-Vision

ORing's switches are intelligent switches. Different from other traditional redundant switches, ORing provides a set of Windows utility (Open-Vision) for user to manage and monitor all of industrial Ethernet switches on the industrial network.

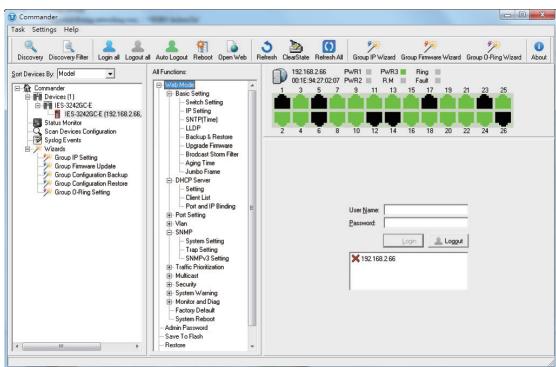

Commander

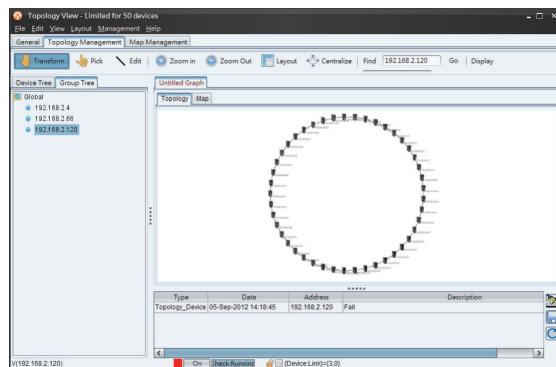

Topology View

Specifications

ORing Switch Model	IGS-P9164GF-MM	IGS-P9164FX-MM	IGS-P9164GF-SS	IGS-P9164FX-SS	IGS-P9164GC
Physical Ports					
10/100/1000Base-T(X) Ports in RJ45 Auto MDI/MDIX	16				
Gigabit Combo Port with 10/100/1000Base-T(X) and 100/1000Base-X SFP Port	-				4
Fiber Ports Specifications	Fiber Ports Number	4			
	Fiber Ports Standard	1000Base-SX	100Base-FX	1000Base-LX	100Base-FX
	Fiber Mode	Multi-mode	Multi-mode	Single-mode	Single-mode
	Fiber Diameter (μm)	62.5/125 μm 50/125 μm	62.5/125 μm 50/125 μm	9/125 μm	9/125 μm
	Fiber Optical Connector	SC	SC	SC	SC
	Typical Distance (km)	0.55 km	2 km	10 km	30 km
	Wavelength (nm)	850 nm	1310 nm	1310 nm	1310 nm
	Max. Output Optical Power (dBm)	-4 dBm	-14 dBm	-3 dBm	-8 dBm
	Min. Output Optical Power (dBm)	-9.5 dBm	-23.5 dBm	-9.5 dBm	-15 dBm
	Max. Input Optical Power (Saturation)	0 dBm	0 dBm	-3 dBm	0 dBm
	Min. Input Optical Power (Sensitivity)	-18 dBm	-31 dBm	-20 dBm	-34 dBm
	Link Budget (dB)	8.5 dB	7.5 dB	10.5 dB	19 dB
Technology					
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX and 100Base-FX IEEE 802.3ab for 1000Base-T IEEE 802.z for 1000Base-X IEEE 802.3x for Flow control IEEE 802.3ad for LACP (Link Aggregation Control Protocol) IEEE 802.1p for COS (Class of Service) IEEE 802.1Q for VLAN Tagging IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s for MSTP (Multiple Spanning Tree Protocol) IEEE 802.1x for Authentication IEEE 802.1AB for LLDP (Link Layer Discovery Protocol)				
MAC Table	8K				
Packet Buffer	4Mbits				
Priority Queues	8				
Processing	Store-and-Forward				
Switch Properties	Switching latency: 7 us Switching bandwidth: 40Gbps Max. Number of Available VLANs: 4095 VLAN ID Range : VID 1 to 4094 IGMP multicast groups: 128 for each VLAN Port rate limiting: User Define				
Jumbo frame	Up to 9.6K Bytes				
Security Features	Device Binding security feature Enable/disable ports, MAC based port security Port based network access control (802.1x) VLAN (802.1Q) to segregate and secure network traffic Radius centralized password management SNMPv3 encrypted authentication and access security Https / SSH enhance network security				

Software Features	STP/RSTP/MSTP (IEEE 802.1D/w/s) Redundant Ring (O-Ring) with recovery time less than 30ms over 250 units TOS/Diffserv supported Quality of Service (802.1p) for real-time traffic VLAN (802.1Q) with VLAN tagging and GVRP supported IGMP Snooping IP-based bandwidth management Application-based QoS management DOS/DDOS auto prevention Port configuration, status, statistics, monitoring, security DHCP Server/Client/Relay SMTP Client Modbus TCP NTP server
Network Redundancy	O-Ring Open-Ring O-Chain MRP ^{*NOTE} Fast Recovery MSTP (RSTP/STP compatible)
RS-232 Serial Console Port	RS-232 in RJ45 connector with console cable. 115200bps, 8, N, 1
LED Indicators	
Power Indicator(PWR)	Green : Power LED x 3
Ring Master Indicator (R.M.)	Green : Indicates that the system is operating in O-Ring Master mode
O-Ring Indicator (Ring)	Green : Indicates that the system operating in O-Ring mode Green Blinking : Indicates that the Ring is broken.
Fault Indicator(Fault)	Amber : Indicate unexpected event occurred
10/100/1000Base-T(X) RJ45 Port Indicato	Green for Link/Act indicator. Dual color LED for speed indicator : Green for 1000Mbps indicator / Amber for 100Mbps indicator / Off light for 10Mbps indicator
1000Base-X Fiber Port Indicator	Green for port Link/Act. (for IGS-P9164GF series)
100Base-FX Fiber Port Indicator	Green for port Link/Act. (for IGS-P9164GFX series)
100/1000Base-X SFP Port Indicator	Green for port Link/Act. (for IGS-P9164GC series)
Fault contact	
Relay	Relay output to carry capacity of 1A at 24VDC on 3-pin terminal block
Power	
Redundant Input Power	LV model : Dual power inputs. 12~48VDC on 2-pin terminal block HV model : Dual power inputs. 85~264VAC/88~373VDC on 3-pin terminal block
Power Consumption (Typ.)	LV : 18Watts LV : 21Watts LV : 18Watts LV : 21Watts LV : 17Watts HV : 18.5Watts HV : 20.7Watts HV : 18.5Watts HV : 19.3Watts HV : 18Watts
Overload Current Protection	Present
Reverse Polarity Protection	Present
Physical Characteristics	
Enclosure	IP-30
Dimensions (W x D x H)	115 (W) x 159 (D) x 154 (H)mm (4.53 x 6.3 x 6.06 inch)
Weight (g)	LV Model : 1780 g LV Model : 1769 g LV Model : 1780 g LV Model : 1769 g LV Model : 1750 g HV Model : 2216 g HV Model : 2205 g HV Model : 2216 g HV Model : 2205 g HV Model : 2186 G
Environmental	
Storage Temperature	-40 to 85°C (-40 to 185°F)
Operating Temperature	-40 to 85°C (-40 to 185°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory approvals	
EMC	CE EMC (EN55024, EN 55032), IEC 61850-3, IEEE 1613, EN50155 (EN50121-3-2)
EMI	EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15B class A,
EMS	EN 55024 (IEC/EN 61000-4-2 (ESD), IEC/EN 61000-4-3 (RS), IEC/EN 61000-4-4 (EFT), IEC/EN 61000-4-5 (Surge), IEC/EN 61000-4-6 (CS), IEC/EN 61000-4-8(PFMF), IEC/EN 61000-4-11(DIP))
Shock	IEC60068-2-27

***NOTE:** This function is available by request only

Free Fall	IEC60068-2-31				
Vibration	IEC60068-2-6				
Safety	EN60950-1				
Other	IEC 61850-3, EN 50155				
MTBF	LV:204467 HV:250111	LV:236,923 HV:300,460	LV:224,681 HV:281,040	LV:196,356 HV:238,082	LV:299,365 HV:408,521
Warranty	5 years				

Ordering Information

IGS-P9 AABCC-FF-GG

Code Definition	10/100/1000Base-T(X) Port Number	Additional Port Number	Additional Port Type	Fiber Optical Mode	Fiber Optical Connector
Option	- 16: 16 ports	- 4: 4 ports	<ul style="list-style-type: none"> - GF: 1000Base-X optical fiber port - FX: 100Base-FX optical fiber port - GC: Gigabit combo port 	<ul style="list-style-type: none"> - MM: Multi-mode - SS: Single-mode 	- SC: SC connector

Available Model	Model Name	Description
	IGS-P9164FX-MM-SC-LV	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x100Base-FX, multi-mode, 2Km/1310nm, SC connector, low-voltage power inputs
	IGS-P9164FX-SS-SC-LV	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x100Base-FX, single-mode, 30Km/1310nm, SC connector, low-voltage power inputs
	IGS-P9164FX-MM-SC-HV_US	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x100Base-FX, multi-mode, 2Km/1310nm, SC connector, high-voltage power inputs, US power cord
	IGS-P9164FX-MM-SC-HV_UK	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x100Base-FX, multi-mode, 2Km/1310nm, SC connector, high-voltage power inputs, UK power cord
	IGS-P9164FX-MM-SC-HV_EU	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x100Base-FX, multi-mode, 2Km/1310nm, SC connector, high-voltage power inputs, EU power cord
	IGS-P9164FX-MM-SC-HV_JP	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x100Base-FX, multi-mode, 2Km/1310nm, SC connector, high-voltage power inputs, JP power cord
	IGS-P9164FX-SS-SC-HV_US	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x100Base-FX, single-mode, 30Km/1310nm, SC connector, high-voltage power inputs, US power cord
	IGS-P9164FX-SS-SC-HV_UK	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x100Base-FX, single-mode, 30Km/1310nm, SC connector, high-voltage power inputs, UK power cord
	IGS-P9164FX-SS-SC-HV_EU	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x100Base-FX, single-mode, 30Km/1310nm, SC connector, high-voltage power inputs, EU power cord
	IGS-P9164FX-SS-SC-HV_JP	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x100Base-FX, single-mode, 30Km/1310nm, SC connector, high-voltage power inputs, JP power cord
	IGS-P9164GF-MM-SC-LV	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x1000Base-SX, multi-mode, 550m/850nm, SC connector, low-voltage power inputs
	IGS-P9164GF-SS-SC-LV	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x1000Base-LX, single-mode, 10Km/1310nm, SC connector, low-voltage power inputs
	IGS-P9164GF-MM-SC-HV_US	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x1000Base-SX, multi-mode, 550m/850nm, SC connector, high-voltage power inputs, US power cord
	IGS-P9164GF-MM-SC-HV_UK	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x1000Base-SX, multi-mode, 550m/850nm, SC connector, high-voltage power inputs, UK power cord

Available Model	Model Name	Description		
	IGS-P9164GF-MM-SC-HV_EU	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x1000Base-SX, multi-mode, 550m/850nm, SC connector, high-voltage power inputs, EU power cord		
	IGS-P9164GF-MM-SC-HV_JP	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x1000Base-SX, multi-mode, 550m/850nm, SC connector, high-voltage power inputs, JP power cord		
	IGS-P9164GF-SS-SC-HV_US	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x1000Base-LX, single-mode, 10Km/1310nm, SC connector, high-voltage power inputs, US power cord		
	IGS-P9164GF-SS-SC-HV_UK	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x1000Base-LX, single-mode, 10Km/1310nm, SC connector, high-voltage power inputs, UK power cord		
	IGS-P9164GF-SS-SC-HV_EU	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x1000Base-LX, single-mode, 10Km/1310nm, SC connector, high-voltage power inputs, EU power cord		
	IGS-P9164GF-SS-SC-HV_JP	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4x1000Base-LX, single-mode, 10Km/1310nm, SC connector, high-voltage power inputs, JP power cord		
	IGS-P9164GC-LV	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4xGigabit combo ports, SFP socket, low-voltage power inputs		
	IGS-P9164GC-HV_US	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4xGigabit combo ports, SFP socket, high-voltage power inputs, US power cord		
	IGS-P9164GC-HV_UK	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4xGigabit combo ports, SFP socket, high-voltage power inputs, UK power cord		
	IGS-P9164GC-HV_EU	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4xGigabit combo ports, SFP socket, high-voltage power inputs, EU power cord		
	IGS-P9164GC-HV_JP	Industrial IEC 61850-3 20-port managed Gigabit Ethernet switch with 16x10/100/1000Base-T(X) and 4xGigabit combo ports, SFP socket, high-voltage power inputs, JP power cord		
Packing List	Optional Accessories (Can be purchased separately)			
<ul style="list-style-type: none"> • IGS-P9164GF(X) or GC x 1 • DIN-Rail Kit x 1 • AC power cord (for HV only) • ORing Tool CD x 1 • Wall-mount Kit x 2 • Quick Installation Guide x 1 • Console Cable x 1 				
<ul style="list-style-type: none"> • Open-Vision M500 : Powerful Network Management Windows Utility Suit, 500 IP devices • DR/SDR/DRP Series DIN-Rail power supply 				





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.