

## Data Sheet

## HMC8205BCHIPS

## FEATURES

**High output power: 45.5 dBm typical at  $P_{IN} = 24$  dBm**

**High power gain: 22 dB typical at  $P_{IN} = 24$  dBm**

**High PAE: 40% typical at  $P_{IN} = 28$  dBm**

**Die size: 4.8 mm × 3.4 mm × 0.1 mm**

## APPLICATIONS

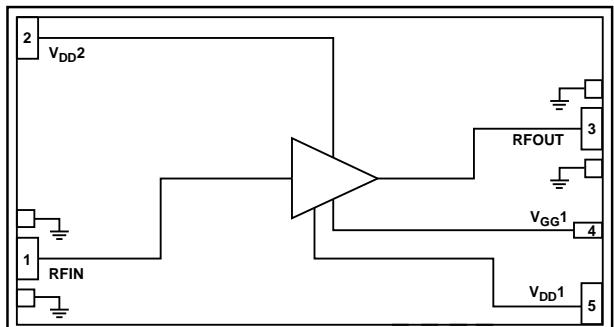
**Military jammers**

**Commercial and military radar**

**Power amplifier stage for wireless infrastructure**

**Test and measurement equipment**

## FUNCTIONAL BLOCK DIAGRAM



13790-001

Figure 1.

## GENERAL DESCRIPTION

The HMC8205BCHIPS is a gallium nitride (GaN), broadband power amplifier that delivers 45.5 dBm (35 W) with 40% power added efficiency (PAE) across an instantaneous bandwidth of 0.4 GHz to 6 GHz. No external matching is required to achieve full band operation. No external inductor is required to bias the

amplifier. In addition, dc blocking capacitors for the RFIN and RFOUT pins are integrated into the HMC8205BCHIPS.

The HMC8205BCHIPS is ideal for pulsed or continuous wave (CW) applications, such as military jammers, wireless infrastructure, radar, and general-purpose amplification.

Rev. A

Document Feedback

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.  
Tel: 781.329.4700 ©2018–2020 Analog Devices, Inc. All rights reserved.  
[Technical Support](#) [www.analog.com](http://www.analog.com)

## TABLE OF CONTENTS

Features .....	1	Typical Performance Characteristics .....	7
Applications .....	1	Theory of Operation .....	15
Functional Block Diagram .....	1	Applications Information .....	16
General Description .....	1	Recommended Bias Sequencing .....	16
Revision History .....	2	Mounting and Bonding Techniques for Millimeterwave GaAs MMICs .....	16
Specifications .....	3	Typical Application Circuit .....	18
Electrical Specifications.....	3	Assembly Diagram.....	18
Absolute Maximum Ratings .....	5	Outline Dimensions.....	19
Thermal Resistance .....	5	Ordering Guide .....	19
ESD Caution.....	5		
Pin Configuration and Function Description .....	6		
Interface Schematics .....	6		

## REVISION HISTORY

**4/2020—Rev. 0 to Rev. A**

Updated Outline Dimensions..... 19

**11/2018—Revision 0: Initial Version**

## SPECIFICATIONS

### ELECTRICAL SPECIFICATIONS

$T_A = 25^\circ\text{C}$ , supply voltage ( $V_{DD} = 50 \text{ V}$ ), total supply current ( $I_{DQ} = 1300 \text{ mA}$ ), and frequency range = 0.4 GHz to 0.8 GHz, unless otherwise noted.

**Table 1.**

Parameter	Min	Typ	Max	Unit
FREQUENCY RANGE	0.4		0.8	GHz
GAIN				
Small Signal Gain	24			dB
Gain Flatness	$\pm 0.5$			dB
RETURN LOSS				
Input	6			dB
Output	6.5			dB
POWER				
Output ( $P_{OUT}$ )				
Input Power ( $P_{IN} = 24 \text{ dBm}$ )	43			dBm
$P_{IN} = 28 \text{ dBm}$	46			dBm
Gain				
$P_{IN} = 24 \text{ dBm}$	19			dB
$P_{IN} = 28 \text{ dBm}$	17			dB
POWER ADDED EFFICIENCY (PAE)				
$P_{IN} = 24 \text{ dBm}$	35			%
$P_{IN} = 28 \text{ dBm}$	40			%
TOTAL SUPPLY CURRENT ( $I_{DQ}$ )	1300			mA
SUPPLY VOLTAGE ( $V_{DD}$ )	28	50	55	V

$T_A = 25^\circ\text{C}$ ,  $V_{DD} = 50 \text{ V}$ ,  $I_{DQ} = 1300 \text{ mA}$ , and frequency range = 0.8 GHz to 4 GHz, unless otherwise noted.

**Table 2.**

Parameter	Min	Typ	Max	Unit
FREQUENCY RANGE	0.8		4	GHz
GAIN				
Small Signal Gain	23	25		dB
Gain Flatness		$\pm 0.8$		dB
RETURN LOSS				
Input	11			dB
Output	10			dB
POWER				
Output ( $P_{OUT}$ )				
Input Power ( $P_{IN} = 24 \text{ dBm}$ )	43	45.5		dBm
$P_{IN} = 28 \text{ dBm}$		46.5		dBm
Gain				
$P_{IN} = 24 \text{ dBm}$	22			dB
$P_{IN} = 28 \text{ dBm}$	19			dB
POWER ADDED EFFICIENCY (PAE)				
$P_{IN} = 24 \text{ dBm}$	35			%
$P_{IN} = 28 \text{ dBm}$	40			%
TOTAL SUPPLY CURRENT ( $I_{DQ}$ )	1300			mA
SUPPLY VOLTAGE ( $V_{DD}$ )	28	50	55	V

$T_A = 25^\circ\text{C}$ ,  $V_{DD} = 50 \text{ V}$ ,  $I_{DQ} = 1300 \text{ mA}$ , and frequency range = 4 GHz to 6 GHz, unless otherwise noted.

Table 3.

Parameter	Min	Typ	Max	Unit
FREQUENCY RANGE	4		6	GHz
GAIN				
Small Signal Gain	24.5	26.5		dB
Gain Flatness		$\pm 1.4$		dB
RETURN LOSS				
Input		8		dB
Output		9		dB
POWER				
Output ( $P_{OUT}$ )				
Input Power ( $P_{IN}$ ) = 24 dBm	43.5	45.5		dBm
$P_{IN} = 28 \text{ dBm}$		46		dBm
Gain				
$P_{IN} = 24 \text{ dBm}$		19		dB
$P_{IN} = 28 \text{ dBm}$		18.5		dB
POWER ADDED EFFICIENCY (PAE)				
$P_{IN} = 24 \text{ dBm}$		32		%
$P_{IN} = 28 \text{ dBm}$		32		%
TOTAL SUPPLY CURRENT ( $I_{DQ}$ )		1300		mA
SUPPLY VOLTAGE ( $V_{DD}$ )	28	50	55	V

## ABSOLUTE MAXIMUM RATINGS

Table 4.

Parameter	Rating
Drain Bias Voltage ( $V_{DDX}$ )	60 V dc
Gate Bias Voltage ( $V_{GG1}$ )	-8 V dc to 0 V dc
Radio Frequency Input Power (RFIN)	35 dBm
Continuous Power Dissipation ( $P_{DISS}$ ), $T = 85^\circ\text{C}$ (Derate 826 mW/ $^\circ\text{C}$ Above $85^\circ\text{C}$ )	115.7 W
Storage Temperature Range	-65°C to +150°C
Operating Temperature Range	-55°C to +85°C
Electrostatic Discharge (ESD) Sensitivity	Class 1A, Passed 375 V
Human Body Model (HBM)	

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

### THERMAL RESISTANCE

Thermal performance is directly linked to mounting substrate design and operating environment. Careful attention to thermal design is required.

$\theta_{JC}$  is the junction to case thermal resistance, channel to bottom of die.

Table 5. Thermal Resistance

Package Type	$\theta_{JC}$	Unit
C-5-7	1.21	°C/W

Table 6. Reliability Information

Parameter	Temperature (°C)
Junction Temperature to Maintain 1,000,000 Hour Mean Time to Failure (MTTF)	225
Nominal Junction Temperature ( $T = 85^\circ\text{C}$ , $V_{DD} = 50 \text{ V}$ , $I_{DQ} = 1300 \text{ mA}$ )	163.7

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.**  
Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTION

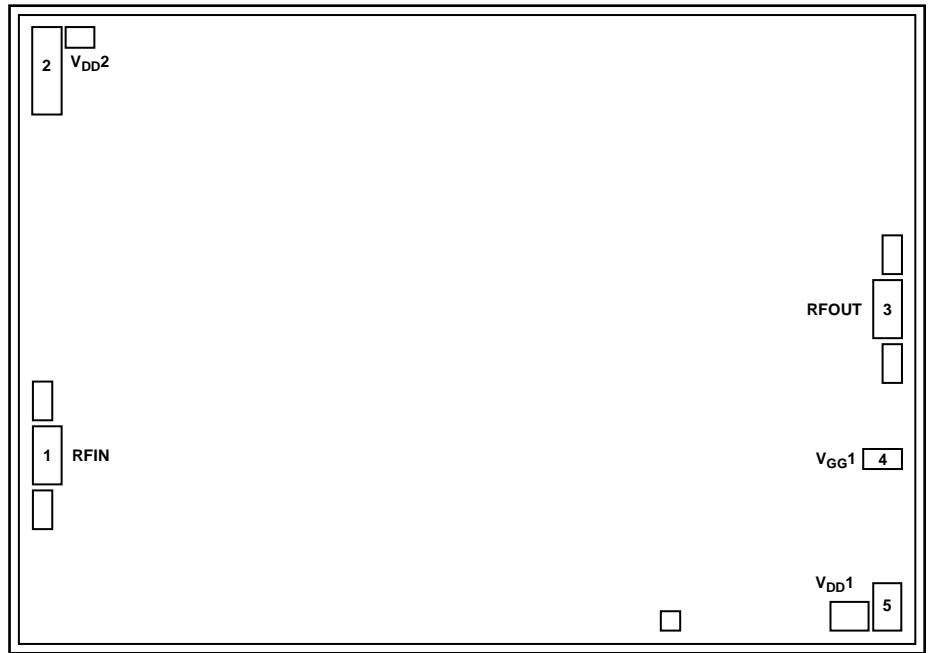


Figure 2. Pad Configuration

Table 7. Pad Function Descriptions

Pad No.	Mnemonic	Description
1	RFIN	RF Input (RFIN). This pin is ac-coupled and internally matched to $50\ \Omega$ . See Figure 4 for the RFIN interface schematic.
2	V <sub>DD</sub> 2	Drain Bias for Second Stage of Amplifier. See Figure 3 for the V <sub>DD</sub> 2 interface schematic.
3	RFOUT	RF Output (RFOUT). This pin is ac-coupled and internally matched to $50\ \Omega$ . See Figure 7 for the RFOUT interface schematic.
4	V <sub>GG</sub> 1	Gate Control for Second Stage of Amplifier. See Figure 6 for the V <sub>GG</sub> 1 interface schematic.
5	V <sub>DD</sub> 1	Drain Bias for First Stage of Amplifier. See Figure 5 for the V <sub>DD</sub> 1 interface schematic.
Die Bottom	GND	Ground. Die bottom must be connected to RF and dc ground. See Figure 8 interface schematic.

## INTERFACE SCHEMATICS




Figure 3. V<sub>DD</sub>2 Interface




Figure 6. V<sub>GG</sub>1 Interface




Figure 4. RFIN Interface




Figure 7. RFOUT Interface




Figure 5. V<sub>DD</sub>1 Interface



Figure 8. GND Interface

## TYPICAL PERFORMANCE CHARACTERISTICS

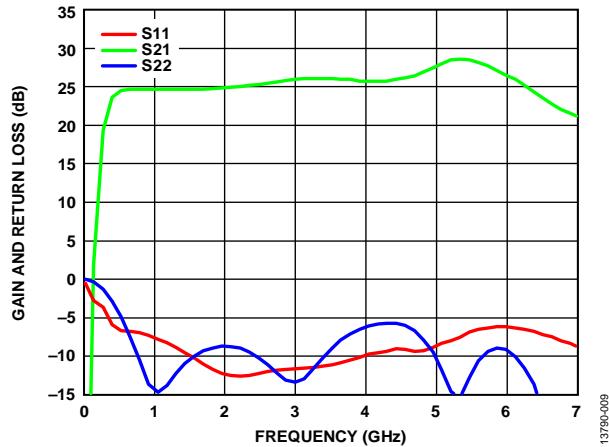


Figure 9. Gain and Return Loss vs. Frequency

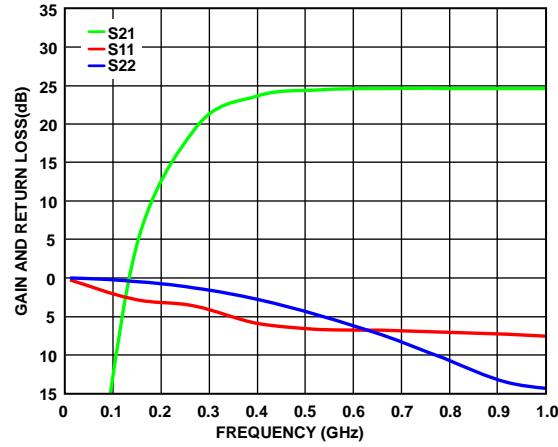


Figure 12. Gain and Return Loss vs. Frequency, 10 MHz to 1000 MHz

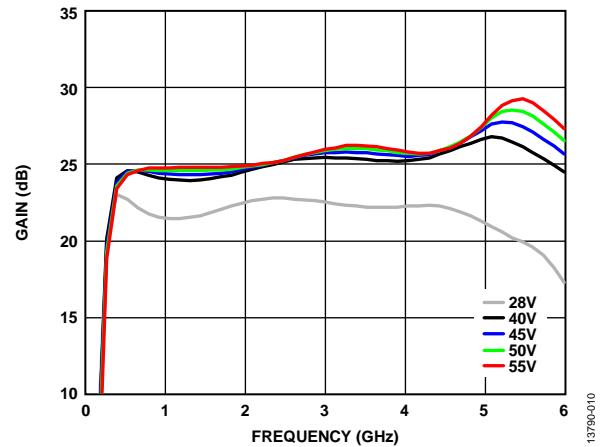


Figure 10. Gain vs. Frequency at Various Supply Voltages

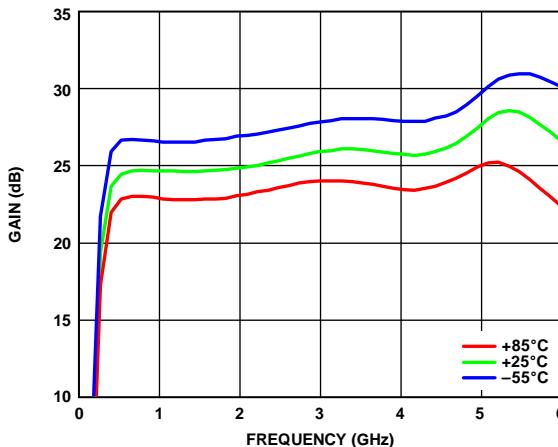


Figure 13. Gain vs. Frequency at Various Temperatures


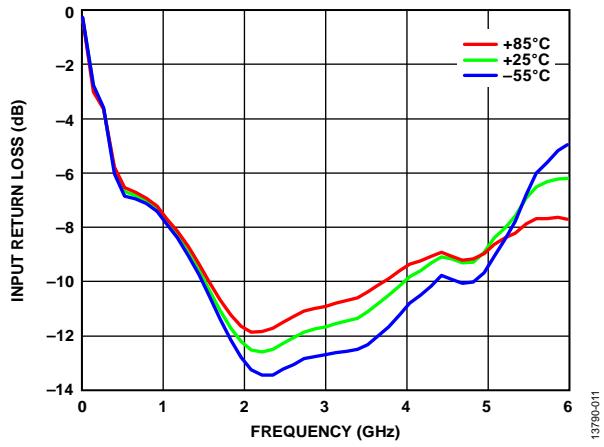
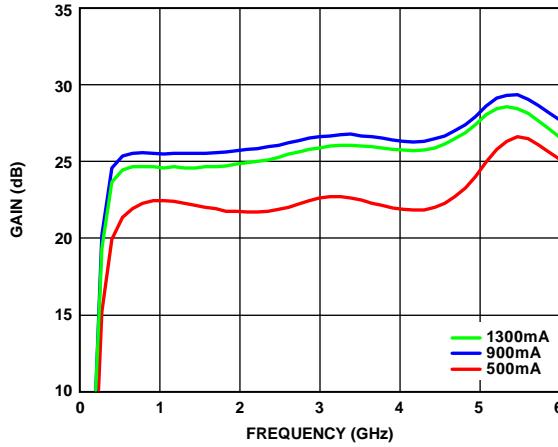
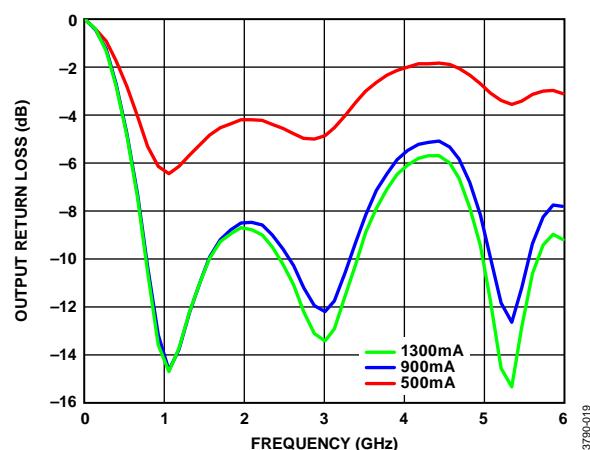
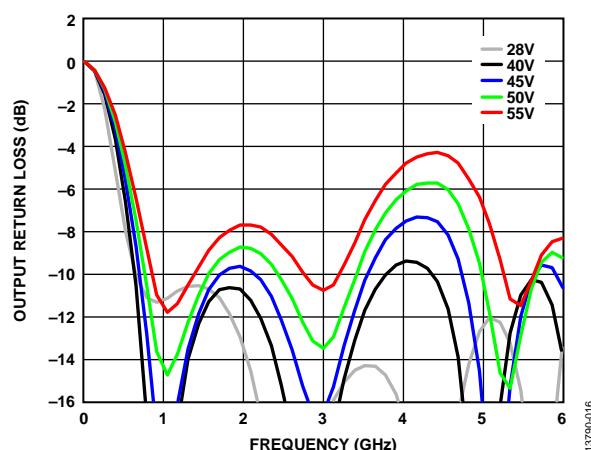
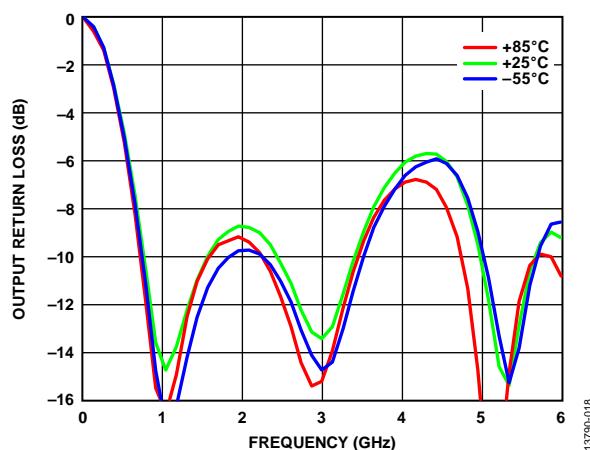
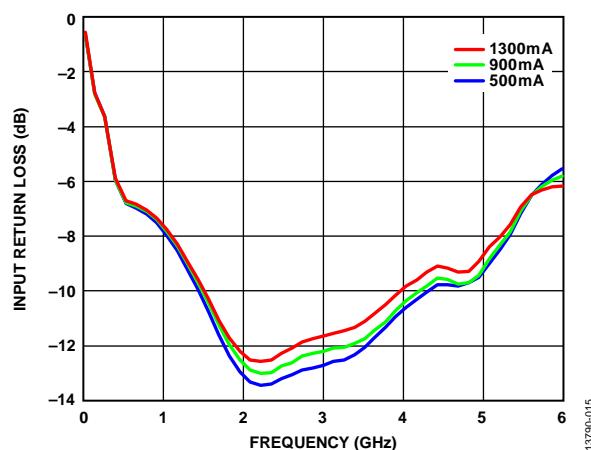
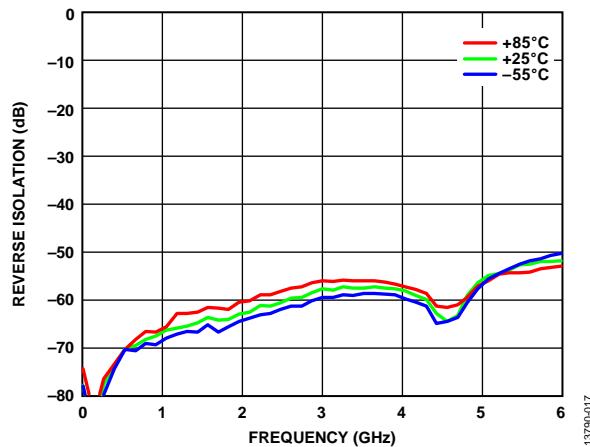
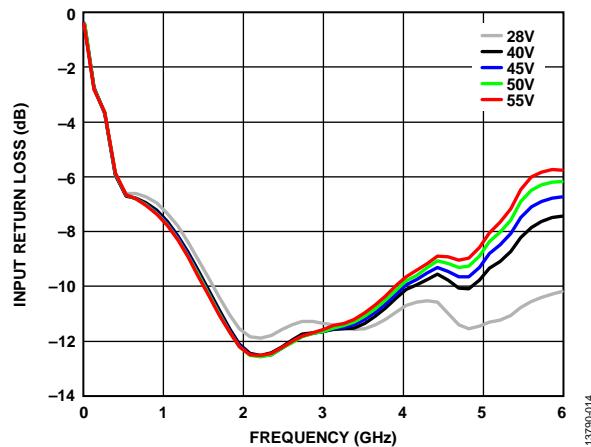
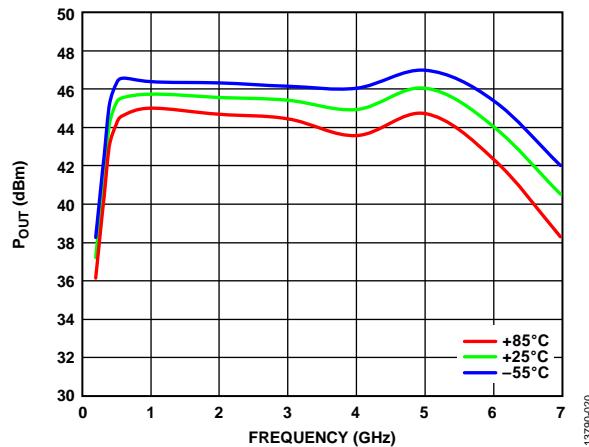
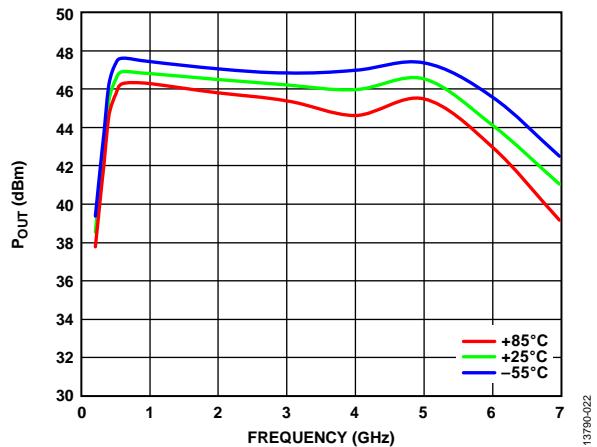
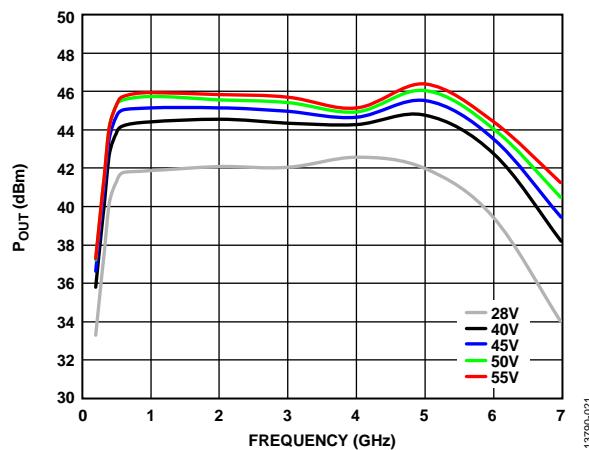
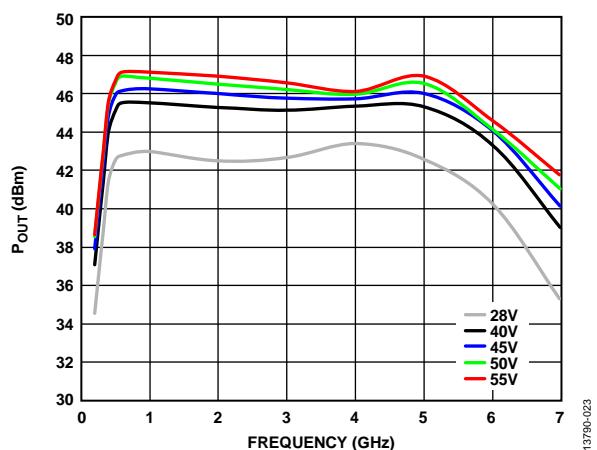
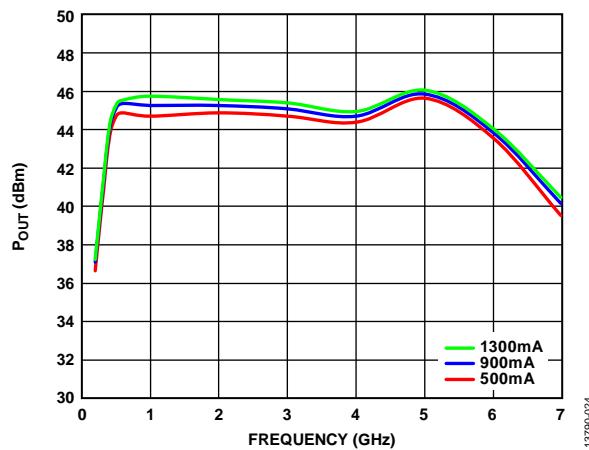


Figure 11. Input Return Loss vs. Frequency at Various Temperatures

Figure 14. Gain vs. Frequency at Various Quiescent Supply Currents ( $I_{DDX}$ )

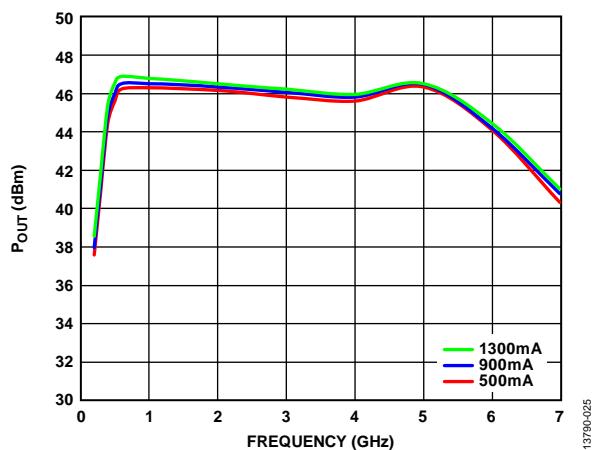

Figure 21.  $P_{OUT}$  vs. Frequency at Various Temperatures,  $P_{IN} = 24\text{ dBm}$ Figure 24.  $P_{OUT}$  vs. Frequency at Various Temperatures,  $P_{IN} = 28\text{ dBm}$ Figure 22.  $P_{OUT}$  vs. Frequency at Various Voltages,  $P_{IN} = 24\text{ dBm}$ Figure 25.  $P_{OUT}$  vs. Frequency at Various Voltages,  $P_{IN} = 28\text{ dBm}$ Figure 23.  $P_{OUT}$  vs. Frequency at Various Quiescent Currents ( $I_{DD1} + I_{DD2}$ ),  $P_{IN} = 24\text{ dBm}$ Figure 26.  $P_{OUT}$  vs. Frequency at Various Quiescent Currents ( $I_{DD1} + I_{DD2}$ ),  $P_{IN} = 28\text{ dBm}$

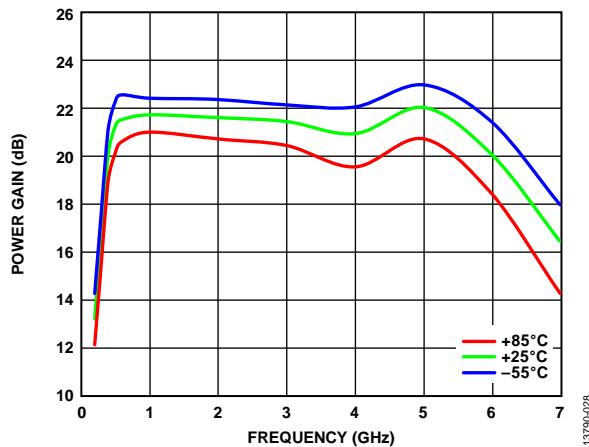


Figure 27. Power Gain vs. Frequency at Various Temperatures,  
Input Power = 24 dBm

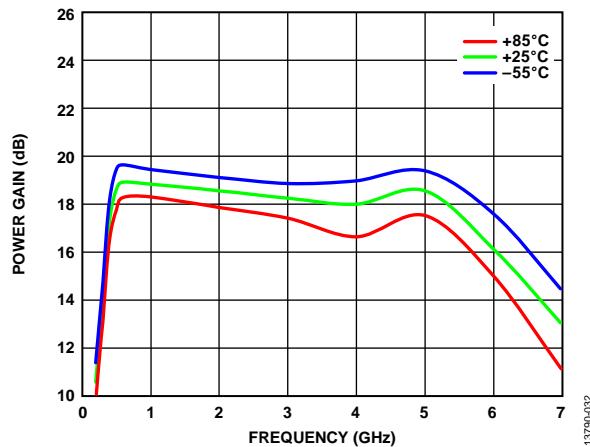


Figure 30. Power Gain vs. Frequency at Various Temperatures,  
Input Power = 28 dBm

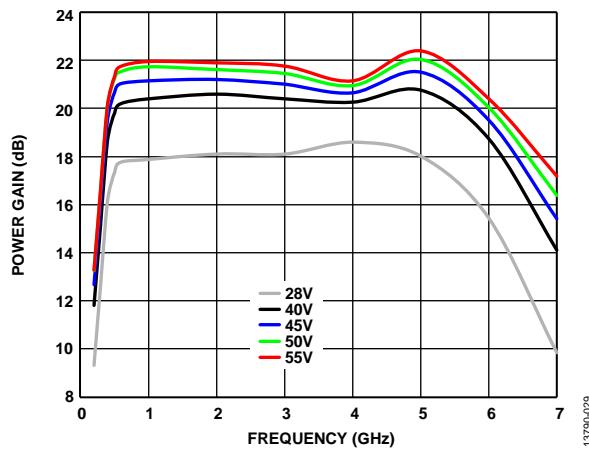


Figure 28. Power Gain vs. Frequency at Various Voltages,  
Input Power = 24 dBm

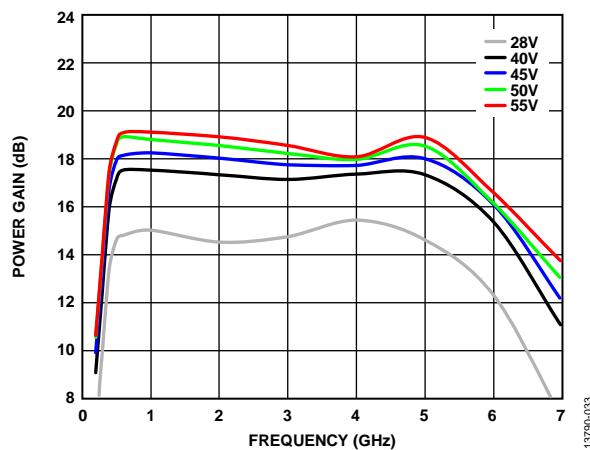


Figure 31. Power Gain vs. Frequency at Various Voltages,  
Input Power = 28 dBm

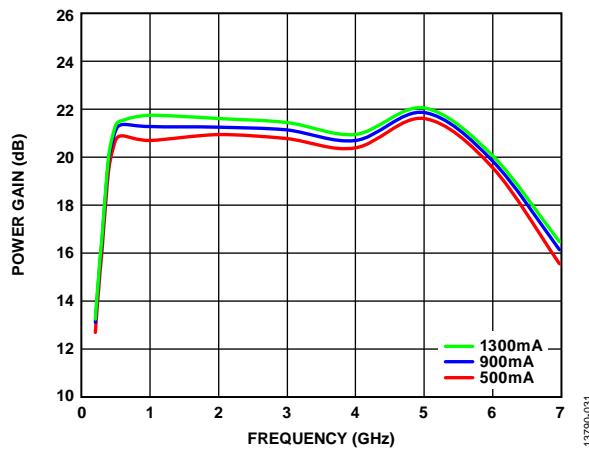


Figure 29. Power Gain vs. Frequency at Various Quiescent Currents ( $I_{DD1} + I_{DD2}$ ),  
Input Power = 24 dBm

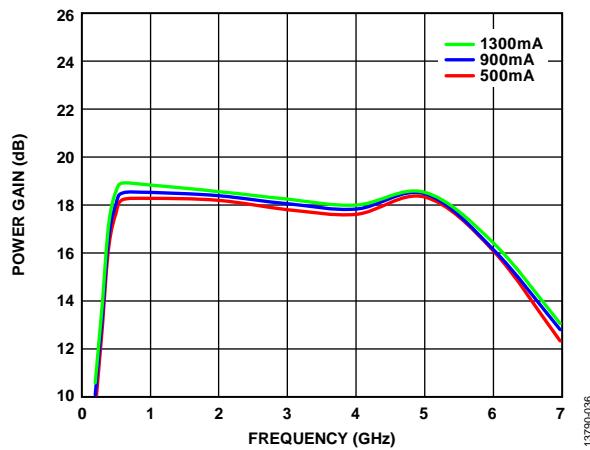


Figure 32. Power Gain vs. Frequency at Various Quiescent Currents ( $I_{DD1} + I_{DD2}$ ),  
Input Power = 28 dBm

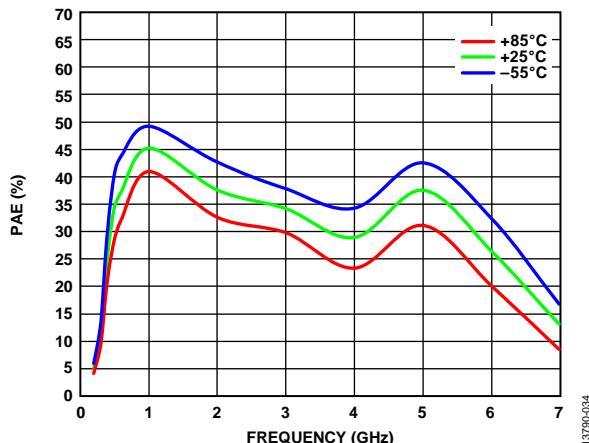


Figure 33. PAE vs. Frequency at Various Temperatures,  
Input Power = 24 dBm

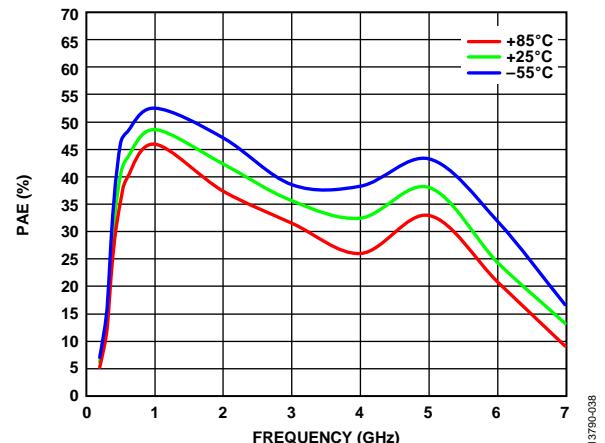


Figure 36. PAE vs. Frequency at Various Temperatures,  
Input Power = 28 dBm

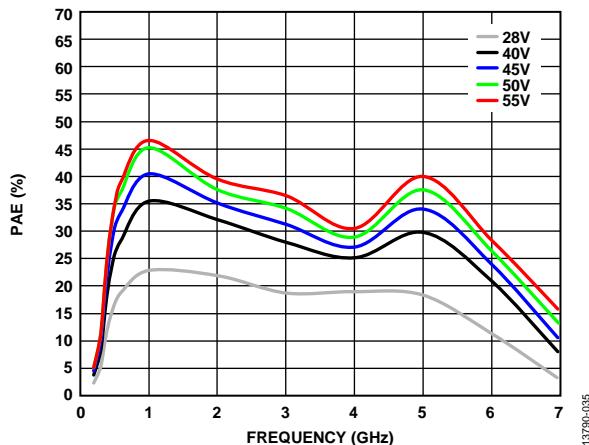


Figure 34. PAE vs. Frequency at Various Voltages,  
Input Power = 24 dBm

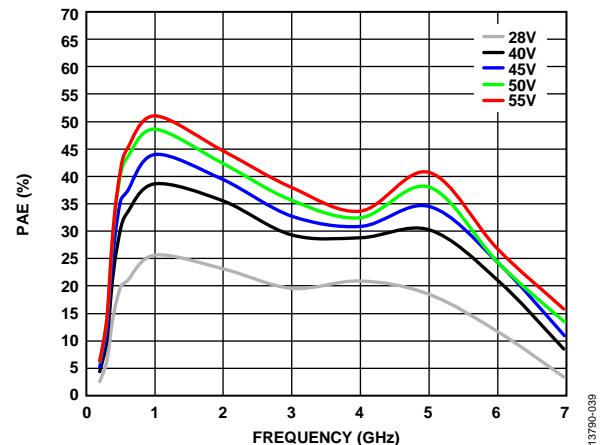


Figure 37. PAE vs. Frequency at Various Voltages,  
Input Power = 28 dBm

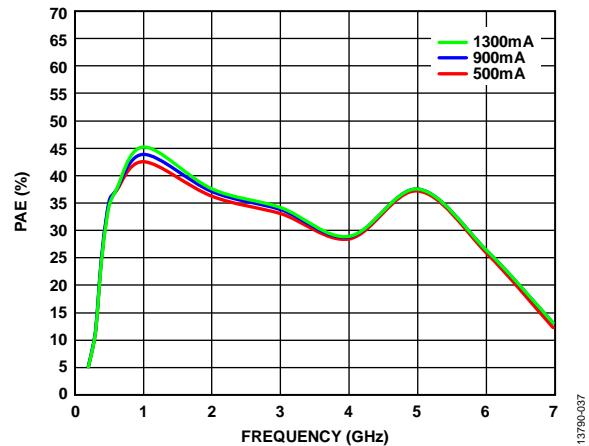


Figure 35. PAE vs. Frequency at Various Quiescent Currents ( $I_{DD1} + I_{DD2}$ ),  
Input Power = 24 dBm

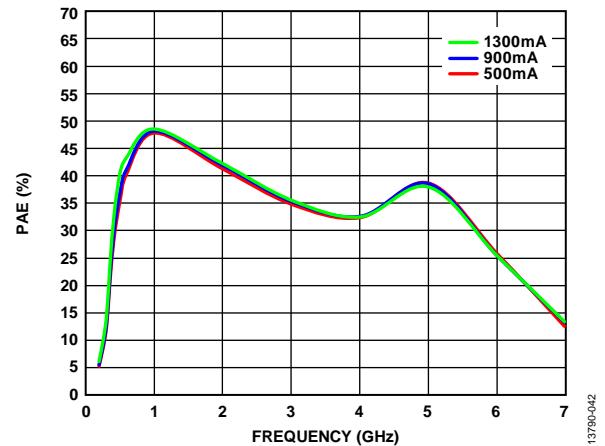


Figure 38. PAE vs. Frequency at Various Quiescent Currents ( $I_{DD1} + I_{DD2}$ ),  
Input Power = 28 dBm

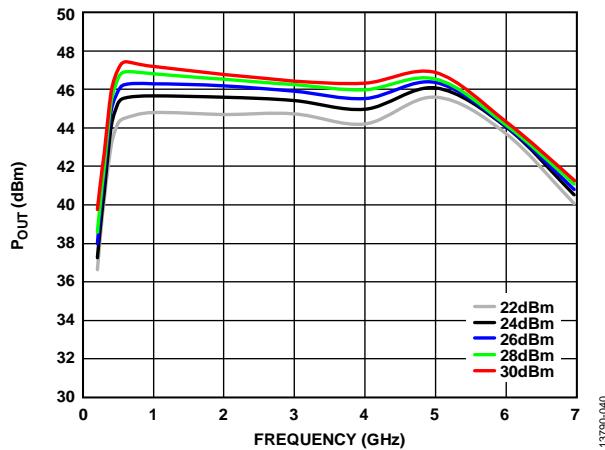
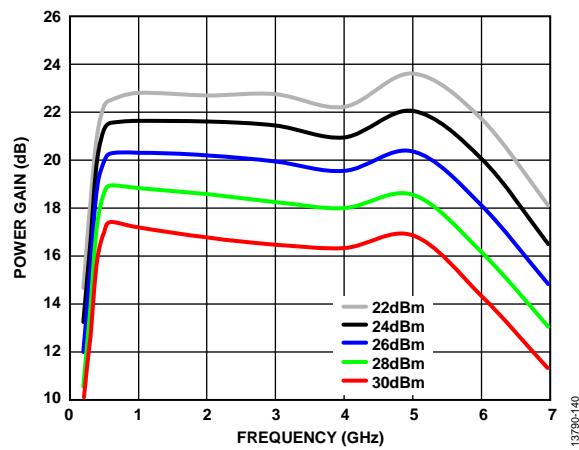
Figure 39.  $P_{OUT}$  vs. Frequency at Various Input Powers

Figure 40. Power Gain vs. Frequency at Various Input Powers

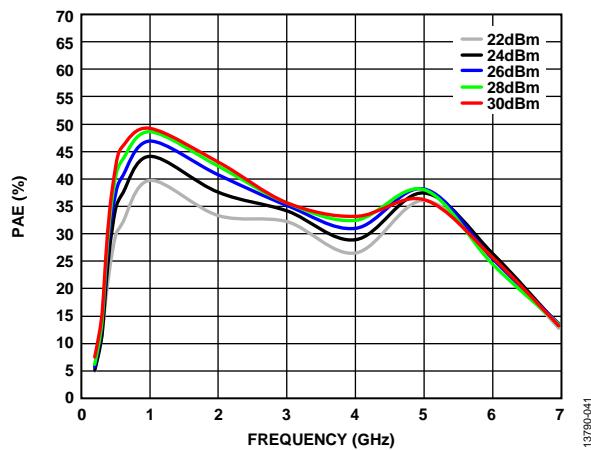
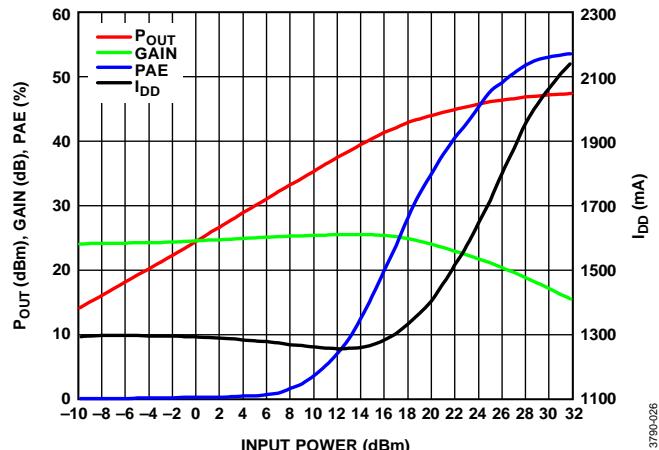
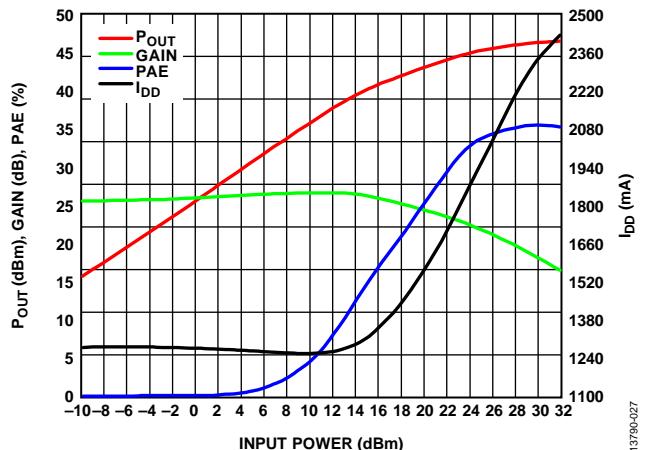
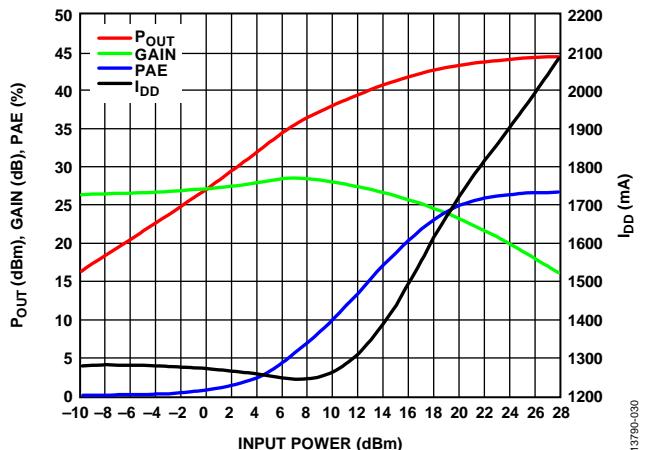


Figure 41. PAE vs. Frequency at Various Input Powers

Figure 42.  $P_{OUT}$ , Gain, PAE, and Total Supply Current with RF Power Applied ( $I_{DD}$ ) vs. Input Power, Frequency = 1 GHzFigure 43.  $P_{OUT}$ , Gain, PAE, and Total Supply Current with RF Power Applied ( $I_{DD}$ ) vs. Input Power, Frequency = 3 GHzFigure 44.  $P_{OUT}$ , Gain, PAE, and Total Supply Current with RF Power Applied ( $I_{DD}$ ) vs. Input Power, Frequency = 6 GHz

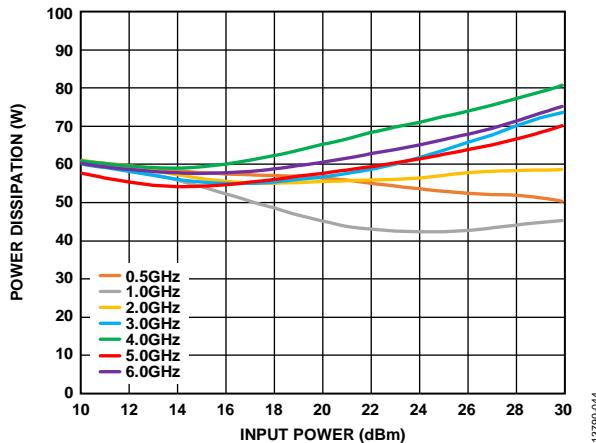


Figure 45. Power Dissipation vs. Input Power at 85°C

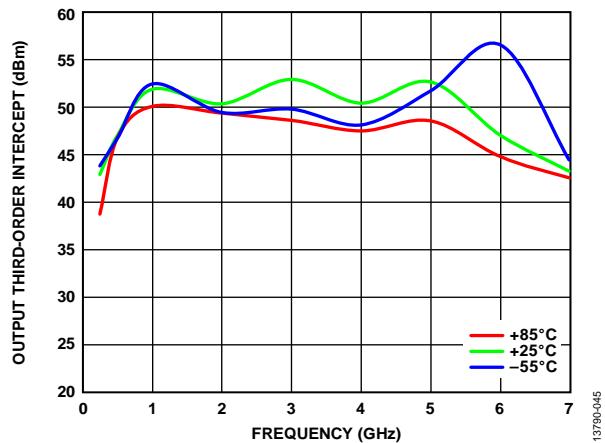
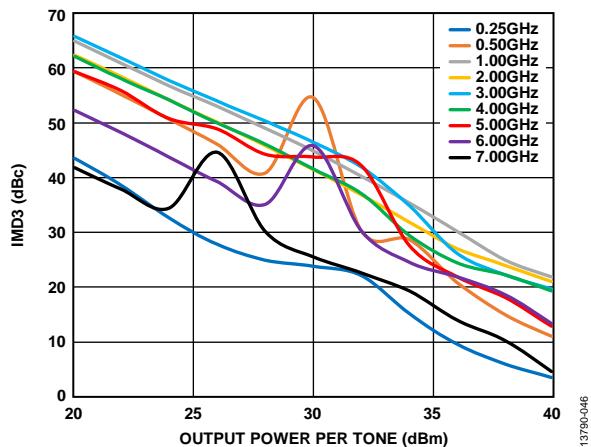
Figure 48. Output Third-Order Intercept Point (IP3) vs. Frequency at Various Temperatures,  $P_{\text{OUT}} \text{ per Tone} = 32 \text{ dBm}$ 

Figure 46. Upper Third-Order Intermodulation Distortion (IMD3) vs. Output Power per Tone at Various Frequencies

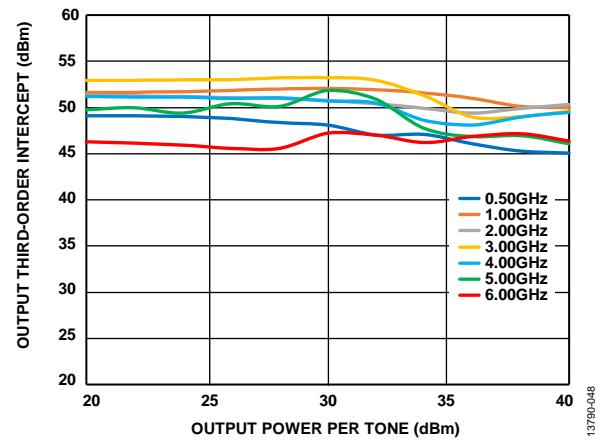


Figure 49. Output Third-Order Intercept Point (IP3) vs. Output Power per Tone at Various Frequencies

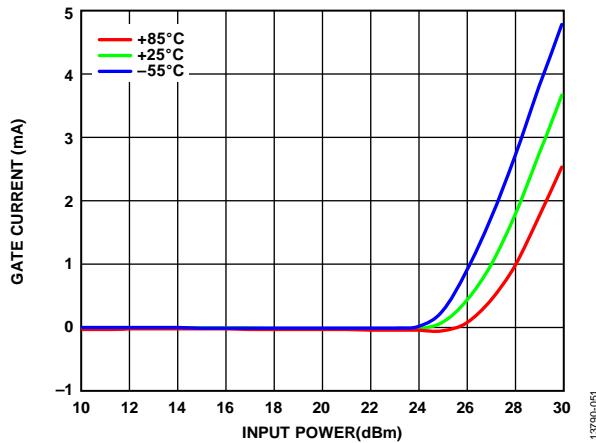


Figure 47. Gate Current vs. Input Power at Various Temperatures at 2 GHz


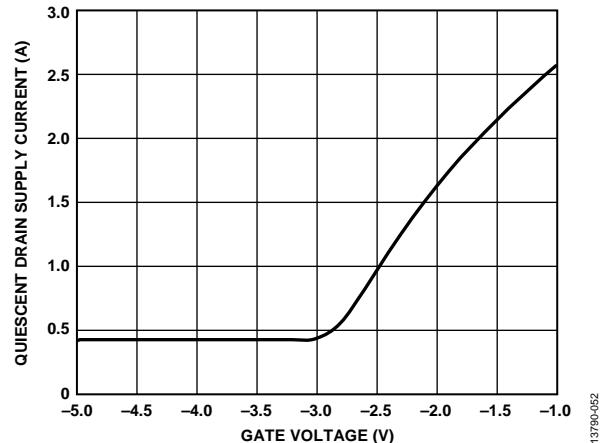
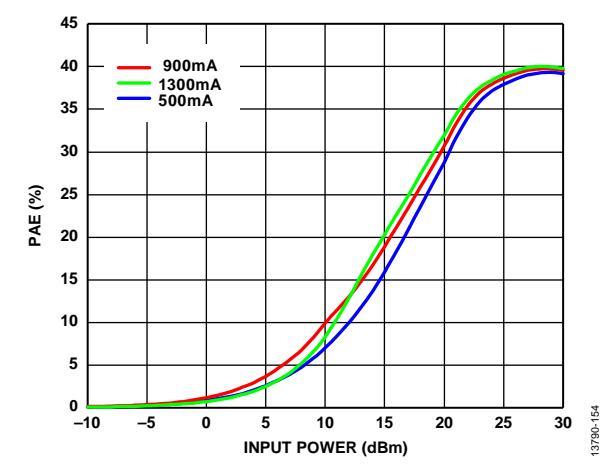
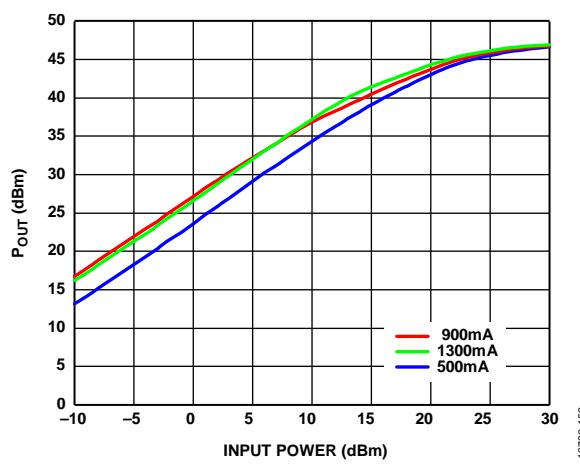
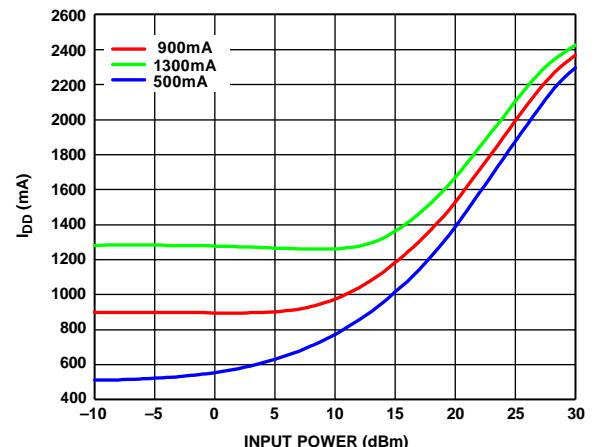


Figure 50. Quiescent Drain Supply Current vs. Gate Voltage

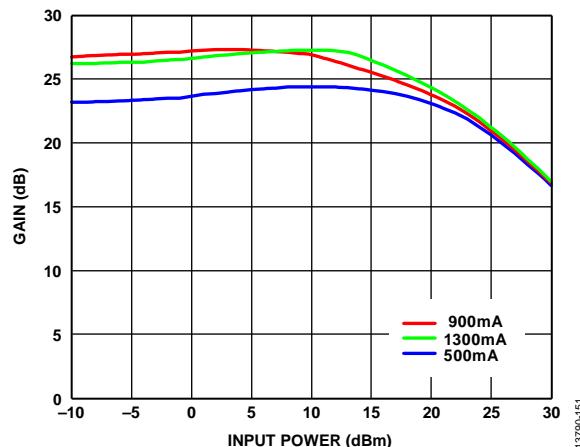

## THEORY OF OPERATION

The HMC8205BCHIPS is a 35 W, GaN power amplifier consisting of two cascaded gain stages. The first stage requires only a single positive drain supply that is also used to internally generate gate bias such that a first stage drain current ( $I_{DD1}$ ) of approximately 400 mA results for a 50 V drain voltage. The second stage is biased by a separate positive drain supply plus an externally applied negative gate supply. When using 50 V to bias the first and second stage drains together, adjust the negative voltage applied to  $V_{GG1}$  such that a total quiescent

drain current of 1300 mA is obtained. When biased as previously described, the HMC8205BCHIPS operates in Class A/Class B, resulting in maximum PAE at saturation. The inclusion of integrated RF chokes for each drain, on-chip dc blocking of the RFIN and RFOUT ports, and capacitive bypassing of the bias supplies improves performance, and simplifies use through the reduction in the required external component count.

## APPLICATIONS INFORMATION

Figure 57 shows the basic connections for operating the HMC8205BCHIPS. The first and second stage drain bias voltages are applied via the  $V_{DD1}$  and  $V_{DD2}$  pads, respectively, while the second stage gate bias voltage is applied via the  $V_{GG1}$  pad. A single supply can be used for both drains. Capacitive bypassing of all drain and gate pads is required as detailed in the Typical Application Circuit section. When used in a  $50\ \Omega$  system, external matching components are not required for the RFIN and RFOUT ports.

### RECOMMENDED BIAS SEQUENCING

The recommended power-up bias sequence follows:

1. Connect to ground.
2. Set  $V_{GG1}$  to  $-8\text{ V}$  to pinch off the second stage drain current,  $I_{DD2}$ .
3. Set  $V_{DD1}$  and  $V_{DD2}$  to  $50\text{ V}$  ( $I_{DD2}$  is pinched off, while the first stage drain current,  $I_{DD1}$ , is approximately  $400\text{ mA}$ ).
4. Adjust  $V_{GG1}$  more positive (to approximately  $-2.5\text{ V}$ ) until a total supply current ( $I_{DQ} = I_{DD1} + I_{DD2} = 1300\text{ mA}$ ) is obtained.
5. Apply the RF signal.

The recommended power-down bias sequence follows:

1. Turn off the RF signal.
2. Set  $V_{GG1}$  to  $-8\text{ V}$  to pinch off  $I_{DD2}$  ( $I_{DD1}$  remains approximately  $400\text{ mA}$ ).
3. Set  $V_{DD1}$  and  $V_{DD2}$  to  $0\text{ V}$ .
4. Set  $V_{GG1}$  to  $0\text{ V}$ .

All measurements for this device were taken using the typical application circuit (see Figure 57), configured as shown on the assembly diagram (see Figure 58). The bias conditions listed in Electrical Specifications section are the operating points recommended to optimize the overall performance. Unless otherwise noted, the data shown was taken using the recommended bias conditions ( $V_{DD} = 50\text{ V}$  and  $I_{DQ} = 1300\text{ mA}$ ). Operation of the HMC8205BCHIPS at other bias conditions may provide performance that differs from what is shown in this data sheet. Some applications may benefit from the reduced power consumption afforded by the use of lower drain voltages and/or lower quiescent drain currents. Lower drain bias operating voltages result in overall lower saturated output power and diminished output linearity. For applications that require a lower overall power consumption, total supply drain currents as low as  $500\text{ mA}$  can be used with minimal saturated performance degradation. To understand the trade-offs between dc bias and performance, see Figure 51 through Figure 54.

### MOUNTING AND BONDING TECHNIQUES FOR MILLIMETERWAVE GaAs MMICS

Attach the die directly to the ground plane eutectically or with high thermal conductive epoxy (see the Handling Precautions section).

To bring the radio frequency signal to and from the chip, it is recommended to implement  $50\ \Omega$  transmission lines using microstrip or coplanar waveguide fabricated on  $0.127\text{ mm}$  ( $0.005\text{ inches}$ ) thick alumina thin film substrates (see Figure 55). When using  $0.254\text{ mm}$  ( $0.010\text{ inches}$ ) thick substrates, it is recommended that a  $0.127\text{ mm}$  ( $0.005\text{ inches}$ ) thick molybdenum (Mo) heat spreader (moly tab) be used to raise the die such that the additional height contributed by the moly tab and die attach layer result in coplanarity (see Figure 56).

Place microstrip substrates as close to the die as possible to minimize bond wire length. Typical die to substrate spacing is  $0.076\text{ mm}$  to  $0.127\text{ mm}$  ( $0.003\text{ inches}$  to  $0.005\text{ inches}$ ).

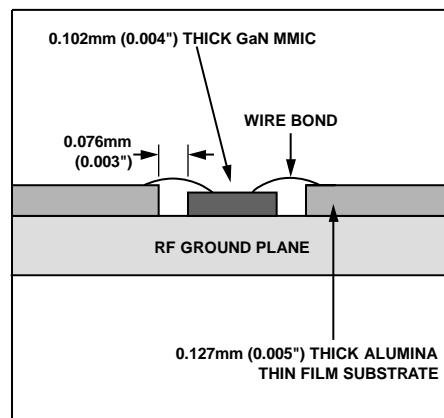


Figure 55. Die Without the Moly Tab

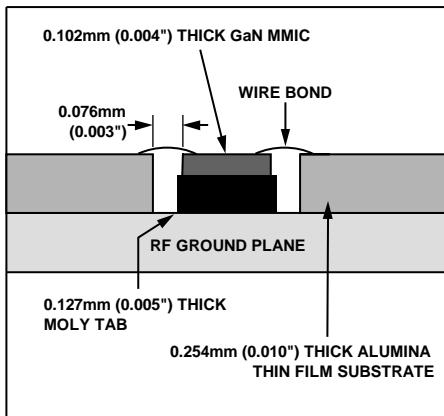


Figure 56. Die With the Moly Tab

13790-054

***Handling Precautions***

To avoid permanent damage, follow these storage, cleanliness, static sensitivity, transient, and general handling precautions:

- Place all bare die in either waffle or gel-based ESD protective containers and then seal the die in an ESD protective bag for shipment. After the sealed ESD protective bag is opened, store all die in a dry nitrogen environment.
- Handle the chips in a clean environment. Do not attempt to clean the chip using liquid cleaning systems.
- Follow ESD precautions to protect against ESD strikes.
- While bias is applied, suppress instrument and bias supply transients. Use shielded signal and bias cables to minimize inductive pickup.
- Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers. The surface of the chip can have fragile air bridges and must not be touched with a vacuum collet, tweezers, or fingers.

## TYPICAL APPLICATION CIRCUIT

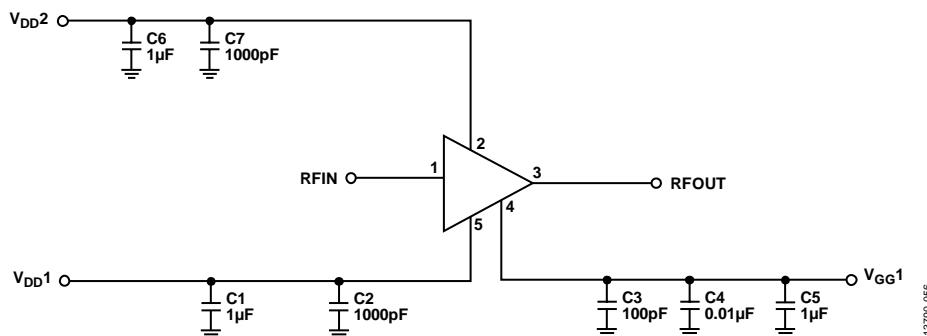


Figure 57. Typical Application Circuit

Table 8. Capacitor Values

Reference Designator	Description	Part Number	Manufacturer
$C_1, C_5$ , and $C_6$	1 $\mu F$ capacitors, 100 V	GRM31CR72A105KA01	Murata
$C_2$ and $C_7$	1000 pF capacitors, 100 V	V30BZ102M6SX	Knowles Capacitors/Dielectric Laboratories
$C_3$	100 pF capacitor, 16 V	SA1212B101MGH5N-L	Presidio Components
$C_4$	0.01 $\mu F$ capacitor, 16 V	MVL3030X103MGH5C	Presidio Components

## ASSEMBLY DIAGRAM

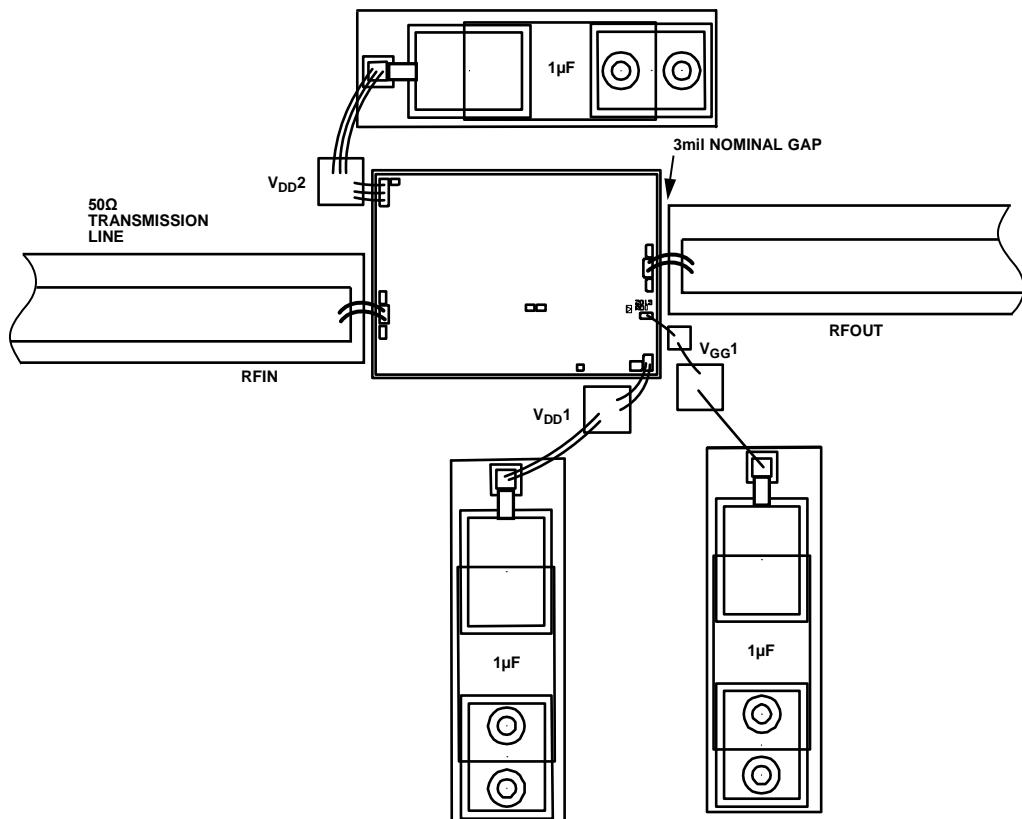


Figure 58. Assembly Diagram

## OUTLINE DIMENSIONS

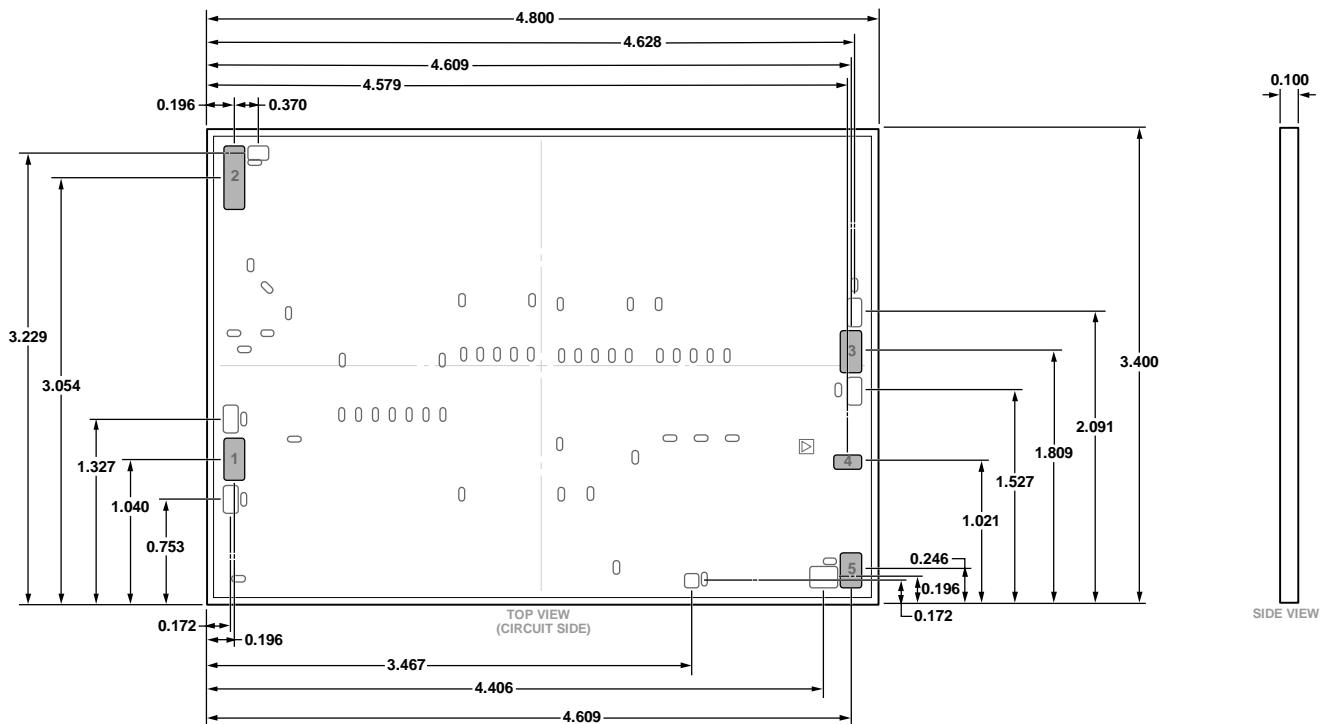


Figure 59. 5-Pad Bare Die [CHIP]

(C-5-7)

Dimensions shown in millimeters

10-05-2018-A

## ORDERING GUIDE

Model <sup>1</sup>	Temperature Range	Package Description	Package Option
HMC8205BCHIPS	-55°C to +85°C	5-Pad Bare Die [CHIP]	C-5-7

<sup>1</sup> The HMC8205BCHIPS is a RoHS compliant part.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.