



8 Port Gigabit Power over Ethernet Midspan POE125U for 10/100/1000 Base-T Networks



Features

- IEEE802.3af Compliant
- Low Cost
- Gigabit Compatible
- Optional Mounting Kit for 19" Rack ¹
- Optional SNMPv3 with TLS/SSL
- Full Power of 123.2W–15.4W per port
- No Power Management Required
- Full Protection OTP, OCP, OVP
- 1 Year Warranty²
- Optional Cisco Legacy Detection

Applications

- VoIP Phones
- Access Points
- Security Systems
- IP Cameras

Safety Approvals

- cUL/UL
- CE

Mechanical Characteristics

- Length: 224.9mm (8.85in)
- Width: 200mm (7.87in)
- Height: 48.5 mm (1.91in)
- Weight: 1.4Kg (3.0lbs)

Output Specifications

Model	Number of Ports	Cisco Legacy Support	SNMP
POE125U-8-C-R	8	Yes	No
POE125U-8-N-R ³	8	Yes	Yes

Reference files:

1. [Phihong Midspan PoE GUI User Manual-v1.0.pdf](#)
2. [Phihong Midspan PoE GUI Installation v1.0.exe](#)
3. [PL2303 Prolific DriverInstaller v1_12_0.zip](#)
4. [POE125U Series Firmware-Rev2.5.zip](#)
5. [Multiport Midspan Installation Manual.pdf](#)
6. [19in Rack Mounting Kit Datasheet.pdf](#)
7. [SNMPv3 Firmware.zip](#)
8. [Certificate Software.zip](#)

Notes:

1. Optional 19" Rack mounting adapter to mount 1 POE125U or 2 side by side; order P/N POE125U-ACCY01
2. Effective January 1, 2019, warranty is valid for one year from purchase date. Optional extended warranties available-please consult factory for more information
3. Trap functions are no longer supported

INPUT:**AC Input Voltage Range**

90 to 264VAC

Input Voltage Rating

100 to 240VAC

Input Frequency

47 to 63Hz

Input Current

2.5A (RMS) max for 90VAC

1.3A (RMS) max for 230 AC

Leakage Current

<3.5mA max at 254VAC, 60Hz

AC Inrush Current

30A (RMS) max for 115VAC

60A (RMS) max for 230VAC

OUTPUT:**Total Output Power**

15.4W per port, 125W Total Power

Ripple and Regulation

100mV maximum

Efficiency²

75% (typical at maximum load, and 120V

AC 60Hz)

Hold-up Time

10mS minimum 120VAC max load

Transient O/P Voltage Protection

60V maximum at switch on and off at any

AC line phase

Turn-On Delay Time

3 sec max at max load, 120VAC 60Hz, 25Hz

ENVIRONMENTAL:**Temperature**

Operation 0°C to +40°C

Non-operation -25°C to +65°C

Humidity 5% to 90%

EMI

Complies with FCC Class B

Complies with EN55032 Class B

Immunity

ESD: EN61000-4-2 Level 3

RS: EN61000-4-3 Level 2

EFT: EN61000-4-4 Level 2

Surge: EN61000-4-5 Level 3

CS: EN61000-4-6 Level 2

Voltage Dips: EN61000-4-11

Harmonic: EN61000-3-2 Class A

IEEE802.3af Interoperability

UNH Interoperability report available upon request

FEATURES:**Cisco Legacy Detection (Option)**

No extern parts required for Legacy devices:

VoIP Phones: 7910,7912,7940,7960

Access Points: 350,1100,1200

Over Voltage/Current, Short Circuit Protection

Outputs equipped with short circuit protection and overload protection as per 802.3af specification. The output can be shorted permanently without damage

Over Temperature Protection

Automat shutdown without damage

Indicators

Green LED: Power detected "ON"


Yellow LED: Fault Detected

Input Connector

AC Input IEC320 3 Pin

Notes:

1. The characteristics defined are at ambient temperature of 25°C unless otherwise specified
2. Efficiency is measured after 30 minutes burn-in

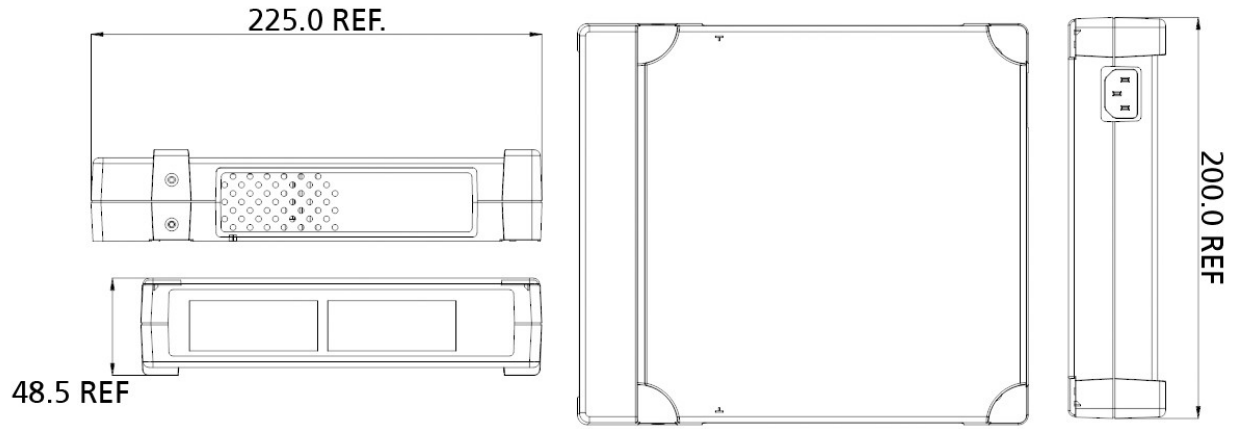

Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

NOTE: This model has/The models in this products series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.