


|                                                                                                                                                        |          |                           |            |          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------------------|------------|----------|
| TE CONNECTIVITY (TE) RESERVES THE RIGHT TO CHANGE THIS DRAWING AT ANYTIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION. | REVISION |                           |            |          |
|                                                                                                                                                        | LTR      | DESCRIPTION               | DATE       | APPROVED |
|                                                                                                                                                        | R        | REVISED PER ECO-15-003651 | 03/10/2015 | I. MYONG |
|                                                                                                                                                        |          |                           |            |          |

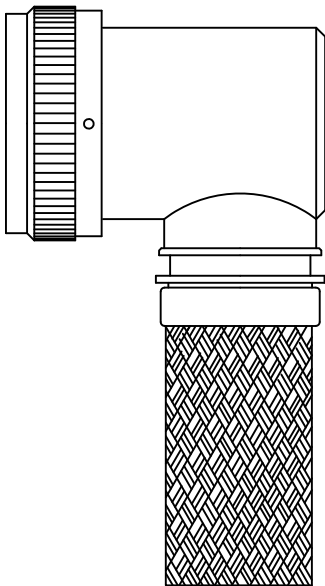

ADAPTER, SHIELD, 90°, CODE 54


NOTES:



- THIS PRODUCT IS DESIGNED TO TERMINATE A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR.
- FOR ADDITIONAL DIMENSIONS, ORDERING INFORMATION AND MODIFICATIONS, SEE CH00-0250-004.
- ADAPTER TO BE PERMANENTLY MARKED WITH CODE IDENT. NO. AND PART NO. (e.g., 06090-203M212-19A08 YYWW).
- FOR LARGER ENTRY SIZES, A 2 PIECE ADAPTER (TYPE II) IS SUPPLIED.
- BRAID TERMINATION RING MAY BE SUPPLIED AS TINEL-LOCK SHAPE MEMORY RING AT MANUFACTURER'S OPTION.
- ADAPTER MATES TO SAE-AS81703, SERIES III, MS3424, MS3446, MS3464, MS3467, MS3468, CLASS E & L.
- ADAPTER MATES TO SAE-AS50151, AS34001 SERIES, CLASS D, E, K, L, U & W: AS34001, AS34011, AS34041, AS34061, AS34501, AS34511, AS34541, AS34561, MS3470, MS3471, MS3472, MS3474, MS3475, MS3476. MIL-DTL-83723, SERIES II, CLASS A & L, MIL-DTL-83723, SERIES I & III, CLASS A, G, K, R & S: M83723/1, /2, /3, /4, /5, /6, /7, /8, /13, /14, /36, /37, /38, /40, /41, /42, /43, /48, /49, /65, /66, /67, /68, /69, /70, /71, /72, /73, /74, /75, /76, /77, /78, /82, /83, /84, /85, /86, /87, /91, /92, /95, /97, /98 (AS31551 CONTROLLED INTERFACE).
- WHEN "L" MODIFICATION, OPTION IS SPECIFIED, COUPLING NUT SHALL HAVE 3 LOCK WIRE HOLES, 120° APART.
- THESE DIMENSIONS APPLY IF AN ADAPTER MATERIAL IS STAINLESS STEEL.

If this document is printed it becomes uncontrolled. Check for the latest revision

©2015 TE CONNECTIVITY LTD. FAMILY OF COMPANIES. ALL RIGHTS RESERVED  
TE CONNECTIVITY AND TE CONNECTIVITY (LOGO) ARE TRADEMARKS.  
OTHER LOGOS PRODUCT AND/OR COMPANY NAMES MAY BE TRADEMARKS OF THEIR RESPECTIVE OWNERS.


Raychem Adapters  
CUSTOMER DRAWING

|                                                                                                                                                                                                                                        |                       |                                                                                                                |                                                                                                                |               |                  |                     |        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|---------------|------------------|---------------------|--------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.<br>REFERENCE METRIC DIMENSIONS ARE IN BRACKETS [metric].<br><br>DECIMALS TOLERANCES:<br>XXX ± .005 [0.13mm]<br>XX ± .01 [0.25mm]<br>X ± .1 [0.50mm]<br><br>ANGLES TOLERANCE: ± 1° | DRAWN: R. RAMIREZ     | DATE: 03/19/1993                                                                                               | <div>TE Connectivity</div> |               |                  |                     |        |
|                                                                                                                                                                                                                                        | CHECKED:              | DATE:                                                                                                          |                                                                                                                |               |                  |                     |        |
|                                                                                                                                                                                                                                        | APPROVED: W. C. GAY   | DATE: 05/19/1993                                                                                               | TITLE:<br><br>ADAPTER, SHIELD, 90°, CODE 54                                                                    |               |                  |                     |        |
|                                                                                                                                                                                                                                        | MATERIAL: SEE NOTES   | FINISH: SEE NOTES                                                                                              |                                                                                                                |               |                  |                     |        |
| SCALE:<br><br>DO NOT SCALE THIS DRAWING                                                                                                                                                                                                | CAD FILE: 203M2XX.dwg | THIRD ANGLE PROJECTION:<br> | SIZE: A                                                                                                        | SHEET: 1 OF 4 | CAGE CODE: 06090 | DRAWING NO: 203M2XX | REV. R |

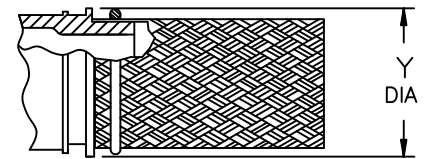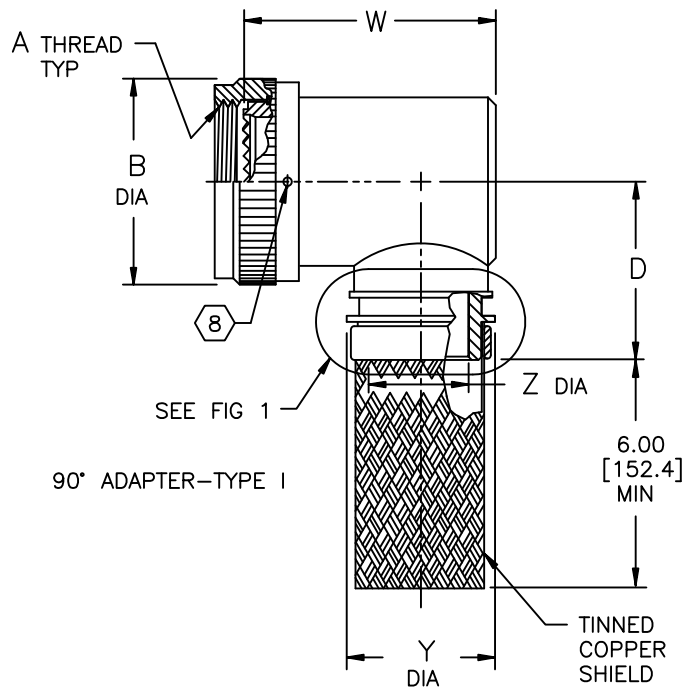

TINEL-LOCK TERMINATION

FIG 1 (5)

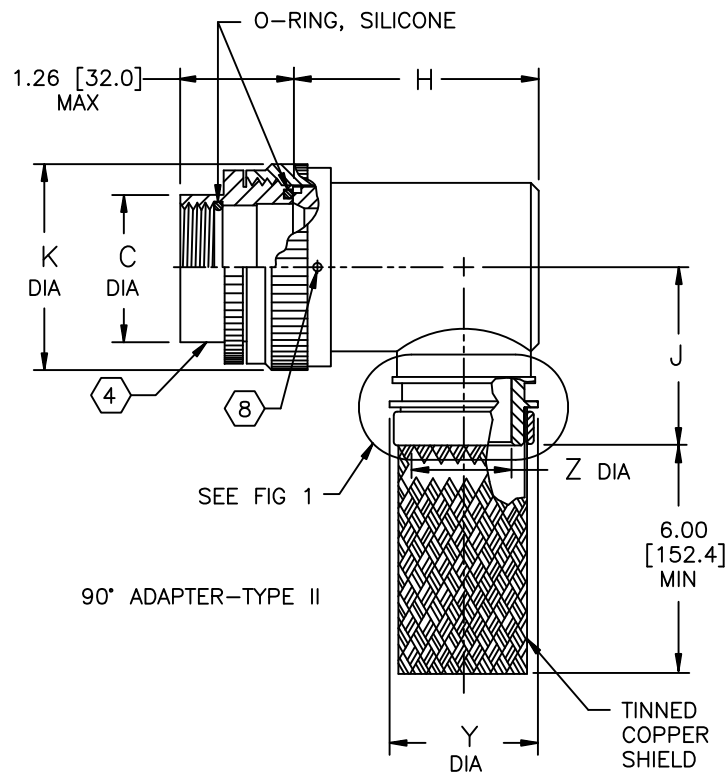

If this document is printed it becomes uncontrolled. Check for the latest revision

# Raychem Adapters

## CUSTOMER DRAWING

DO NOT  
SCALE THIS  
DRAWINGSIZE  
ACAGE  
06090SHEET  
2 OF 4

DWG. NO.

203M2XX

REV  
R

| TABLE I   |                                                                                   |                                                                                   |                                                                                                         |                   |                  |                  |                |                |                                                                                           |
|-----------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-------------------|------------------|------------------|----------------|----------------|-------------------------------------------------------------------------------------------|
| ORDER NO. | SHELL SIZE                                                                        |                                                                                   | MAX ENTRY SIZE TYPE I  | A THREAD CLASS 2B | B DIA MAX        | C MAX            | D MAX          | W MAX          | W MAX  |
|           |  |  |                                                                                                         |                   |                  |                  |                |                |                                                                                           |
| 03        | 3                                                                                 |                                                                                   | 04                                                                                                      | .562-24 UNEF      | .669<br>[17.00]  | .695<br>[17.65]  | 1.13<br>[28.7] | 1.06<br>[26.9] | 1.06<br>[26.8]                                                                            |
| 08        |                                                                                   | 8 & 8S                                                                            | 04                                                                                                      | .500-20 UNF       | .617<br>[15.67]  | .630<br>[16.00]  | 1.10<br>[27.9] | .98<br>[25.0]  | .90<br>[22.9]                                                                             |
| 10        |                                                                                   | 10, 10S & 10SL                                                                    | 05                                                                                                      | .625-24 UNEF      | .734<br>[18.64]  | .757<br>[19.23]  | 1.16<br>[29.5] | 1.06<br>[27.0] | 1.00<br>[25.5]                                                                            |
| 12        | 7                                                                                 | 12 & 12S                                                                          | 08                                                                                                      | .750-20 UNEF      | .858<br>[21.79]  | .882<br>[22.40]  | 1.22<br>[31.0] | 1.16<br>[29.5] | 1.13<br>[28.8]                                                                            |
| 14        | 12                                                                                | 14 & 14S                                                                          | 09                                                                                                      | .875-20 UNEF      | .984<br>[24.99]  | 1.007<br>[25.58] | 1.28<br>[32.5] | 1.22<br>[31.0] | 1.22<br>[30.9]                                                                            |
| 16        | 19                                                                                | 16 & 16S                                                                          | 11                                                                                                      | 1.000-20 UNEF     | 1.112<br>[28.24] | 1.132<br>[28.75] | 1.35<br>[34.3] | 1.36<br>[34.5] | 1.34<br>[34.0]                                                                            |
| 18        | 27                                                                                | 18                                                                                | 12                                                                                                      | 1.062-18 UNEF     | 1.218<br>[30.94] | 1.218<br>[30.94] | 1.40<br>[35.6] | 1.48<br>[37.5] | 1.48<br>[37.5]                                                                            |
| 20        | 37                                                                                | 20                                                                                | 14                                                                                                      | 1.188-18 UNEF     | 1.345<br>[34.16] | 1.345<br>[34.16] | 1.46<br>[37.1] | 1.67<br>[42.5] | 1.55<br>[39.3]                                                                            |
| 22        |                                                                                   | 22                                                                                | 16                                                                                                      | 1.312-18 UNEF     | 1.468<br>[37.30] | 1.468<br>[37.30] | 1.53<br>[38.9] | 1.75<br>[44.5] | 1.67<br>[42.4]                                                                            |
| 24        |                                                                                   | 24                                                                                | 18                                                                                                      | 1.438-18 UNEF     | 1.593<br>[40.46] | 1.593<br>[40.46] | 1.59<br>[40.4] | 1.79<br>[45.5] | 1.78<br>[45.3]                                                                            |
| 28        |                                                                                   | 28                                                                                | 22                                                                                                      | 1.750-18 UNS      | 1.969<br>[50.01] | 1.969<br>[50.01] | 1.78<br>[45.2] | 2.15<br>[54.7] | 2.02<br>[51.2]                                                                            |
| 32        |                                                                                   | 32                                                                                | 24                                                                                                      | 2.000-18 UNS      | 2.219<br>[56.36] | 2.219<br>[56.36] | 1.90<br>[48.3] | 2.42<br>[61.4] | 2.38<br>[60.5]                                                                            |
| 36        |                                                                                   | 36                                                                                | 28                                                                                                      | 2.250-16 UN       | 2.469<br>[62.71] | 2.469<br>[62.71] | 2.03<br>[51.6] | 2.67<br>[67.7] | 2.60<br>[66.0]                                                                            |
| 40        |                                                                                   | 40                                                                                | 28                                                                                                      | 2.500-16 UN       | 2.719<br>[69.06] | 2.719<br>[69.06] | 2.15<br>[54.6] | 2.90<br>[73.7] | 2.85<br>[72.5]                                                                            |
| 44        |                                                                                   | 44                                                                                | 28                                                                                                      | 2.750-16 UN       | 2.969<br>[75.41] | 2.969<br>[75.41] | 2.28<br>[57.9] | 3.15<br>[80.0] | 2.99<br>[76.0]                                                                            |
| 48        |                                                                                   | 48                                                                                | 28                                                                                                      | 3.000-16 UN       | 3.219<br>[81.76] | 3.219<br>[81.76] | 2.40<br>[61.0] | 3.40<br>[86.3] | 3.40<br>[86.3]                                                                            |
| 61        | 61                                                                                |                                                                                   | 18                                                                                                      | 1.500-18 UNEF     | 1.653<br>[42.00] | 1.653<br>[42.00] | 1.62<br>[41.1] | 1.90<br>[48.3] | 1.92<br>[48.8]                                                                            |

If this document is printed it becomes uncontrolled. Check for the latest revision

**Raychem Adapters  
CUSTOMER DRAWING**

|                                                                                     |                                 |      |       |        |          |     |
|-------------------------------------------------------------------------------------|---------------------------------|------|-------|--------|----------|-----|
|  | DO NOT<br>SCALE THIS<br>DRAWING | SIZE | CAGE  | SHEET  | DWG. NO. | REV |
|                                                                                     |                                 | A    | 06090 | 3 OF 4 | 203M2XX  | R   |

| TABLE II      |                |                |                |                |                |
|---------------|----------------|----------------|----------------|----------------|----------------|
| ENTRY<br>SIZE | K<br>MAX       | Z<br>MAX       | ØY<br>MAX      | J<br>MAX       | H<br>MAX       |
| 03            | NA             | .19<br>[4.8]   | .52<br>[13.1]  | NA             | NA             |
| 04            | NA             | .25<br>[6.4]   | .52<br>[13.1]  | NA             | NA             |
| 05            | .83<br>[21.0]  | .31<br>[7.9]   | .52<br>[13.1]  | 1.16<br>[29.5] | 1.19<br>[30.2] |
| 06            | .83<br>[21.0]  | .38<br>[9.5]   | .70<br>[17.9]  | 1.16<br>[29.5] | 1.19<br>[30.2] |
| 07            | .92<br>[23.4]  | .44<br>[11.1]  | .70<br>[17.9]  | 1.22<br>[31.0] | 1.38<br>[35.1] |
| 08            | .96<br>[24.5]  | .50<br>[12.7]  | .70<br>[17.9]  | 1.22<br>[31.0] | 1.38<br>[35.1] |
| 09            | 1.18<br>[30.0] | .56<br>[14.3]  | .70<br>[17.9]  | 1.35<br>[34.3] | 1.51<br>[38.4] |
| 10            | 1.18<br>[30.0] | .63<br>[15.9]  | .95<br>[24.2]  | 1.35<br>[34.3] | 1.51<br>[38.4] |
| 11            | 1.28<br>[32.5] | .69<br>[17.5]  | .95<br>[24.2]  | 1.40<br>[35.6] | 1.63<br>[41.4] |
| 12            | 1.35<br>[34.3] | .75<br>[19.1]  | .95<br>[24.2]  | 1.40<br>[35.6] | 1.63<br>[41.4] |
| 13            | 1.41<br>[35.8] | .81<br>[20.6]  | .95<br>[24.2]  | 1.46<br>[37.1] | 1.78<br>[45.2] |
| 14            | 1.41<br>[35.8] | .88<br>[22.2]  | 1.20<br>[30.6] | 1.46<br>[37.1] | 1.78<br>[45.2] |
| 15            | 1.60<br>[40.6] | .94<br>[23.8]  | 1.20<br>[30.6] | 1.53<br>[38.9] | 1.88<br>[47.8] |
| 16            | 1.60<br>[40.6] | 1.00<br>[25.4] | 1.20<br>[30.6] | 1.53<br>[38.9] | 1.88<br>[47.8] |
| 17            | 1.57<br>[40.0] | 1.06<br>[27.0] | 1.31<br>[33.2] | 1.39<br>[35.2] | 1.72<br>[43.7] |
| 18            | 1.66<br>[42.2] | 1.13<br>[28.6] | 1.31<br>[33.2] | 1.59<br>[40.4] | 2.01<br>[51.1] |
| 20            | 1.71<br>[43.5] | 1.25<br>[31.8] | 1.65<br>[42.0] | 1.44<br>[36.7] | 1.83<br>[46.4] |
| 21            | 2.23<br>[56.6] | 1.38<br>[35.0] | 1.65<br>[42.0] | 1.85<br>[47.0] | 2.29<br>[58.2] |
| 22            | 2.23<br>[56.6] | 1.38<br>[35.0] | 1.65<br>[42.0] | 1.85<br>[47.0] | 2.29<br>[58.2] |
| 24            | 2.23<br>[56.6] | 1.50<br>[38.1] | 1.65<br>[42.0] | 1.92<br>[48.8] | 2.42<br>[61.5] |
| 28            | 2.48<br>[63.0] | 1.75<br>[44.5] | 1.93<br>[49.0] | 2.17<br>[55.1] | 2.67<br>[67.8] |

If this document is printed it becomes uncontrolled. Check for the latest revision

**Raychem Adapters  
CUSTOMER DRAWING**

|                                                                                     |                                 |      |       |        |          |     |
|-------------------------------------------------------------------------------------|---------------------------------|------|-------|--------|----------|-----|
|  | DO NOT<br>SCALE THIS<br>DRAWING | SIZE | CAGE  | SHEET  | DWG. NO. | REV |
|                                                                                     |                                 | A    | 06090 | 4 OF 4 | 203M2XX  | R   |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.