
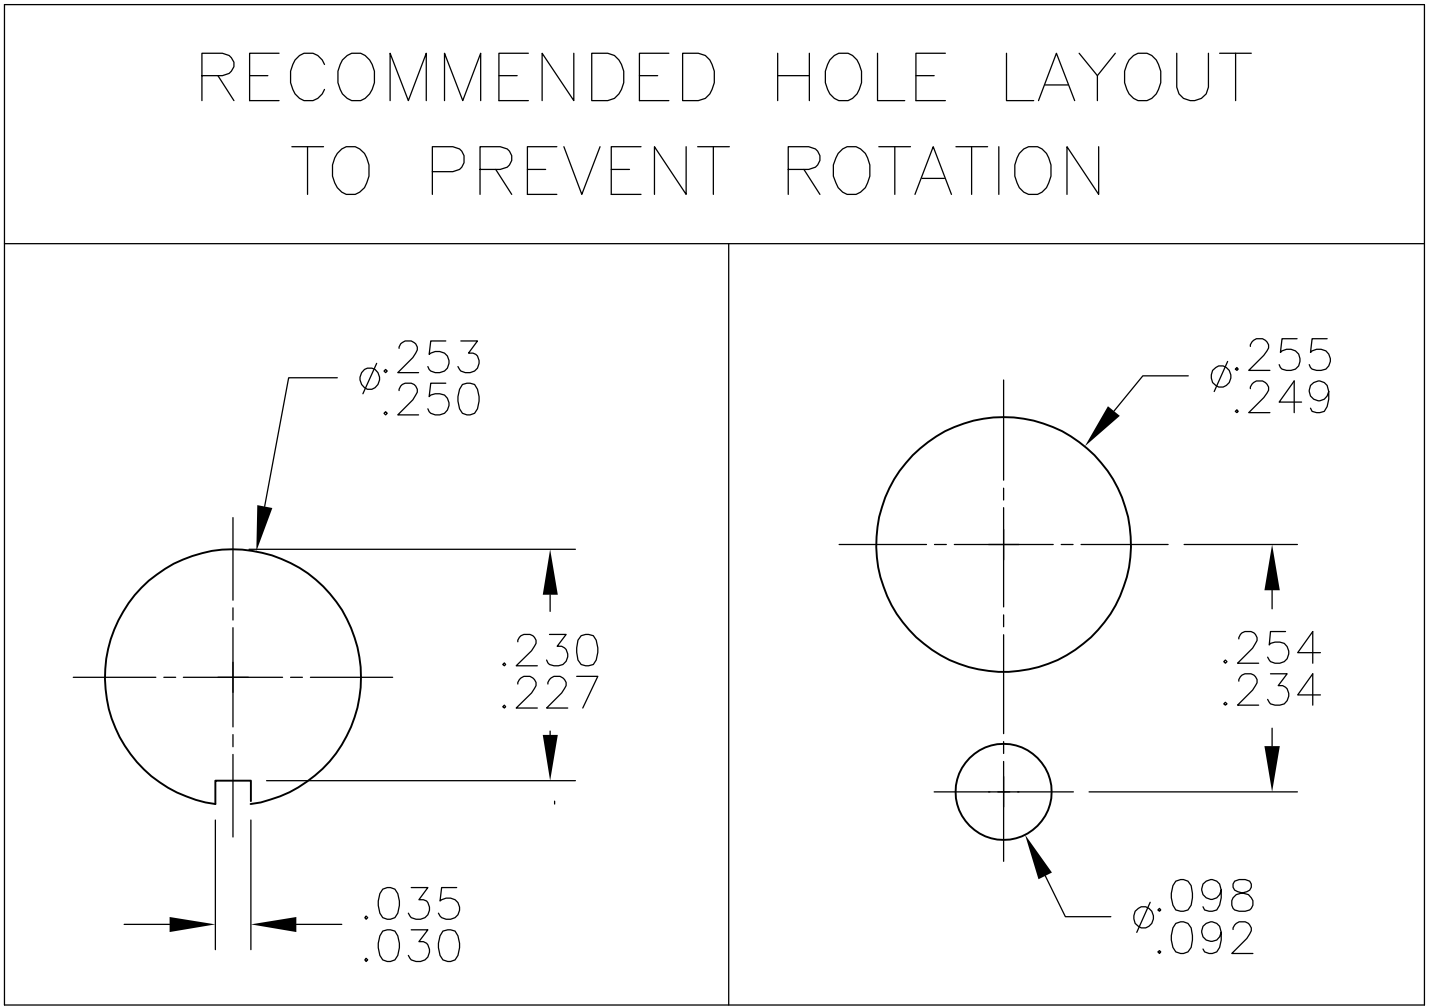
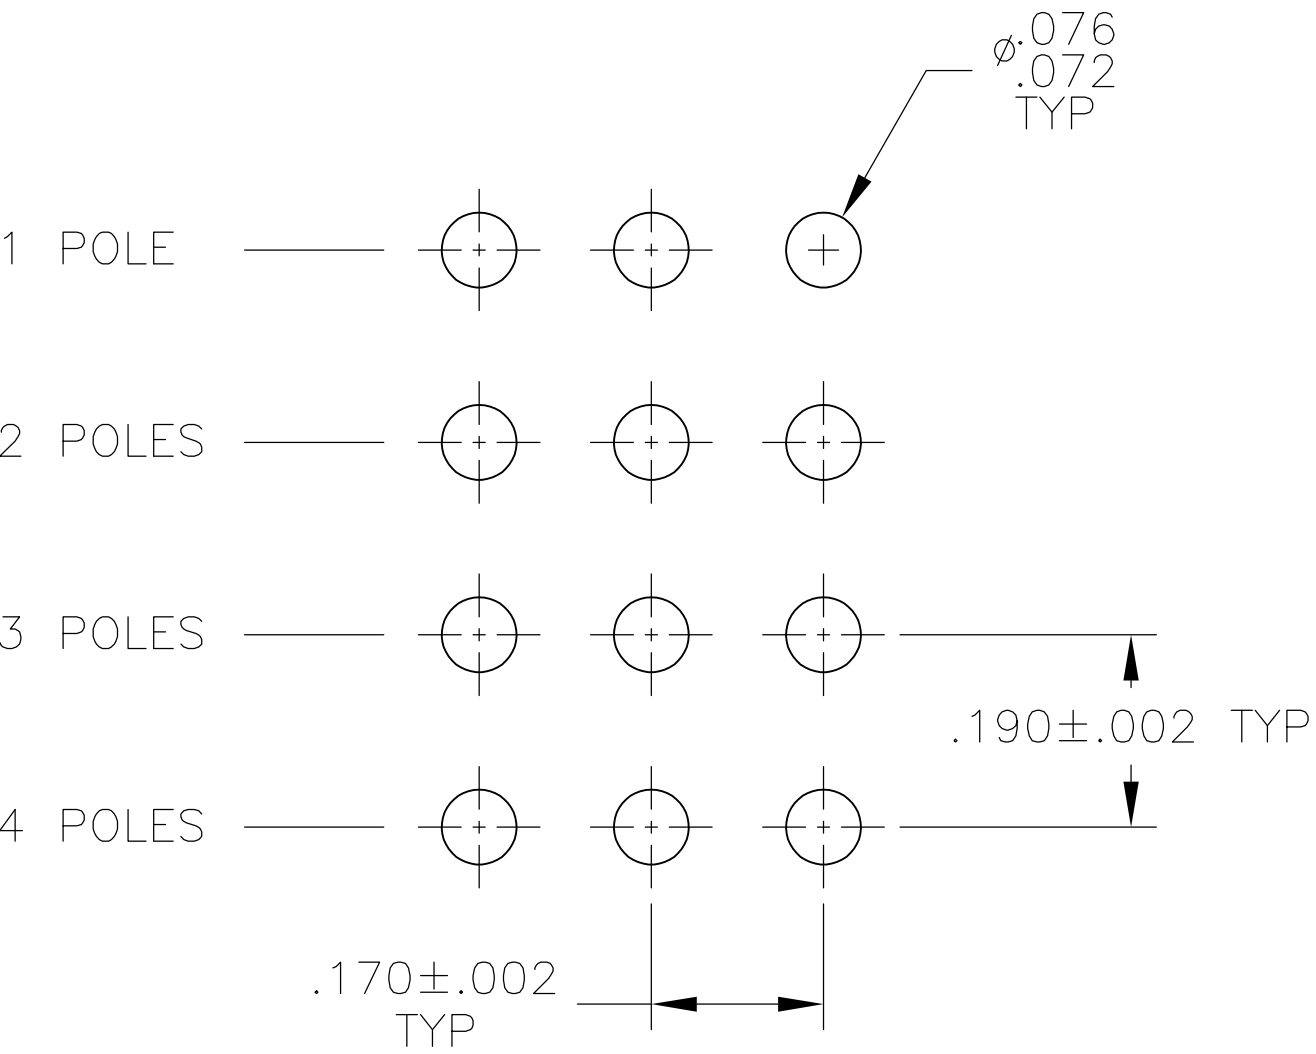






LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A6	REVISED PER ECO-14-016841	07NOV2014	NK	RH


MATERIALS		
NO	COMPONENT NAME	FINISH
1	HOUSING	
2	END TERMINAL	
3	CENTER TERMINAL	
4	ROCKER CONTACT	
5	ACTUATOR TIP	
6	ACTUATOR SPRING	
7	ACTUATOR	
8	ACTUATOR GUIDE	
9	FRAME	
10	RETAINER/STOPPER	
11	PLUNGER SPRING	
12	PLUNGER PIN	
13	BUSHING	
14	PLUNGER	
15	MOUNTING NUTS (1)	
17	INTERNAL TOOTL LOCKWASHER	
18	STEM O-RING	
19	BUSHING O-RING	

SPECIFICATIONS — SEE NOTE 3			
CURRENT RATING UL & CSA	6A @ 125 VAC (RESISTIVE)		
	3A @ 250 VAC (RESISTIVE)		
	4A @ 28 VDC (RESISTIVE)		
INITIAL CONTACT RESISTANCE	10 MILLIOHMS MAX @ 2–4 VDC, 1A		
DIELECTRIC STRENGTH	1,500 MEGOHMS MIN.		
WITHSTANDING VOLTAGE	1,000 VAC		
TRAVEL	.140		
ACTUATION FORCE	.4 to 2 kgf		
OPERATING TEMPERATURE	–20C TO +85C		
STORAGE TEMPERATURE	–40C TO +85C		
CONTACT TIMING	BREAK BEFORE MAKE		
TERMINAL SEAL	OVER MOLDED		
DURABILITY	PARAMETER	PUSH ON/ PUSH OFF	MOMENTARY
	250 VAC (3A RESISTIVE)	50,000	50,000
	125 VAC (6A RESISTIVE)	50,000	50,000
	28 VDC (4A RESISTIVE)	50,000	50,000


- | | |
|---|--|
| 1 | TERMINAL NUMBERS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON THE SWITCHES |
| 2 | EACH SWITCH SUPPLIED WITH THE FOLLOWING MOUNTING HARDWARE:
(1) 1/4-40 UNS-2B HEX NUT
(1) LOCK WASHER
(1) BUSHING 'O' RING |
| 5 | WIRE LUG CONTACTS WILL ACCEPT 2 #20 AWG SOLID OR STRANDED WIRES |
| 6 | MARK SWITCH |
| 7 | ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS) |
| 8 | PUSHBUTTON CAP SOLD SEPARATELY. SEE DRAWING 1825068 AND 1825069 FOR AVAILABLE CAPS |
| 9 | LASER MARKING USED FOR PARTS |

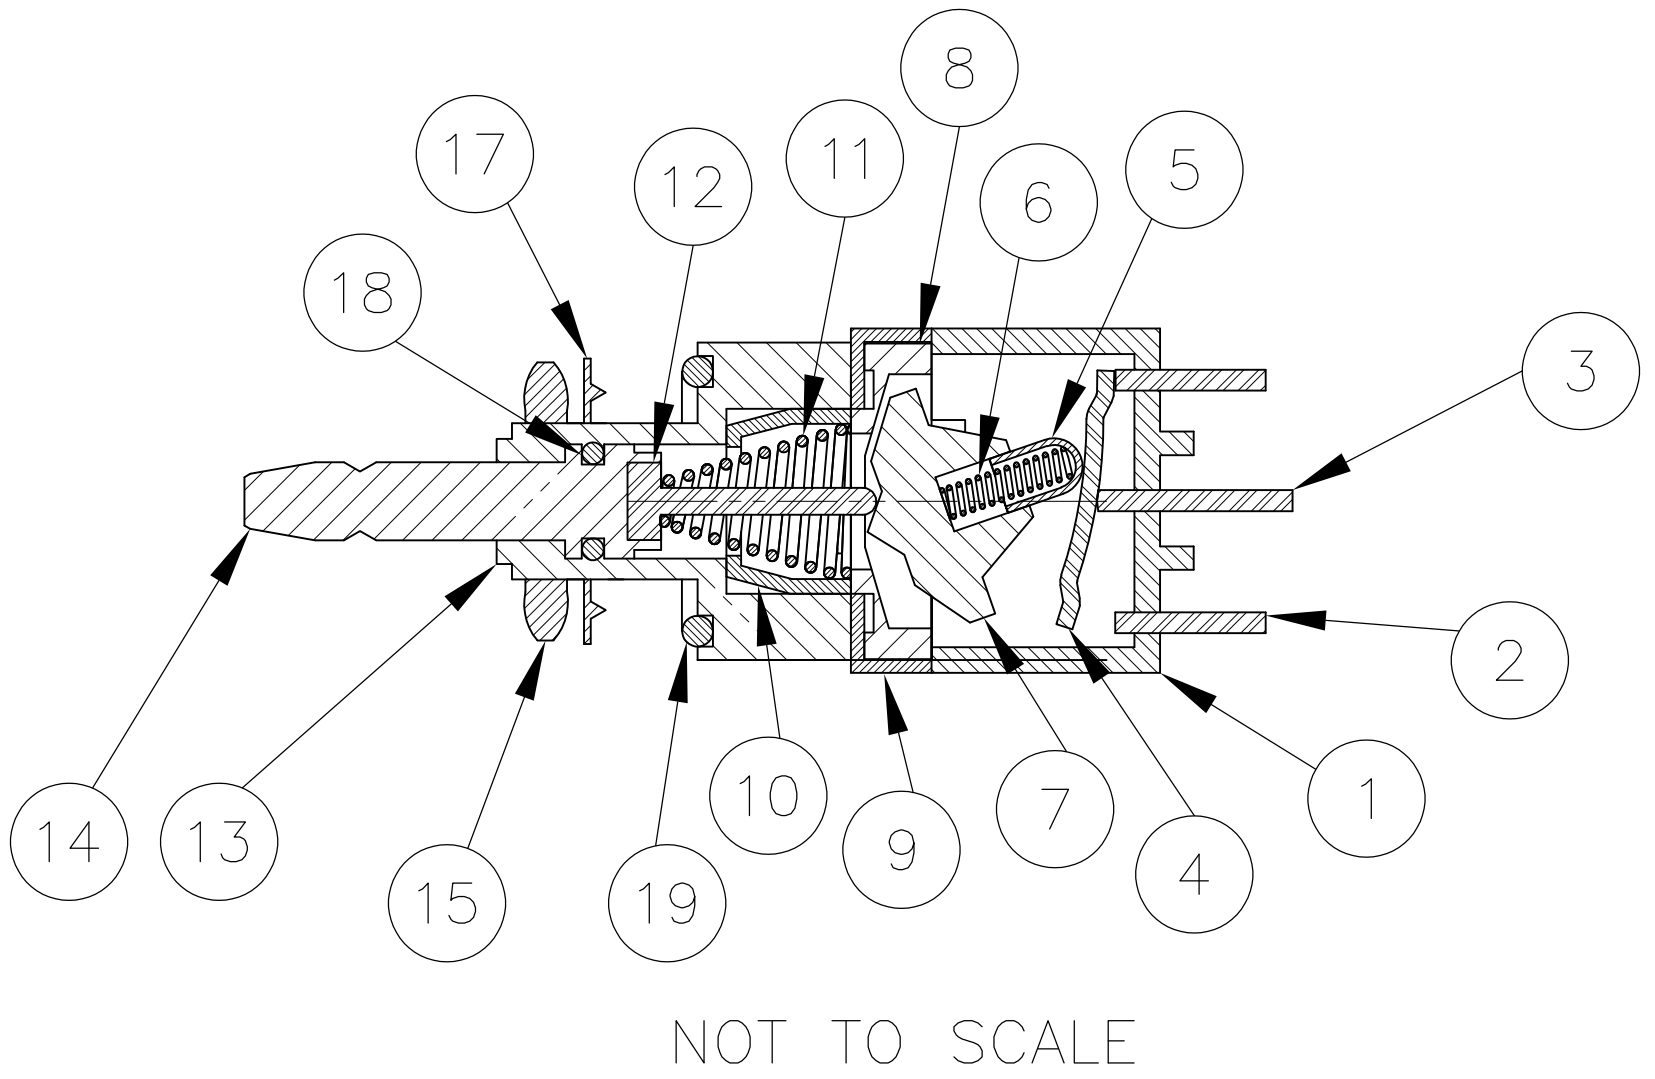

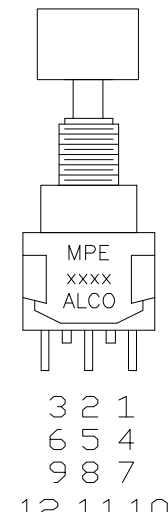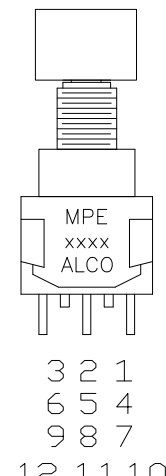PART NUMBER	Alco P/N	Mark Switch 	Poles	Throws	Terminal	Function		Connected Terminals	
									
4-1437567-8	MPE406R	MPE 406R	4	2	Wire lug	ON	MOM	2-1, 5-4, 8-7, 11-10	2-3, 5-6, 8-9, 11-12
4-1437567-7	MPE406N	MPE 406N	4	2	Wire lug	ON	ON	2-1, 5-4, 8-7, 11-10	2-3, 5-6, 8-9, 11-12
4-1437567-6	MPE306F	MPE 306F	3	2	Wire lug	ON	MOM	2-1, 5-4, 8-7	2-3, 5-6, 8-9
4-1437567-5	MPE206R	MPE 206R	2	2	Wire lug	ON	MOM	2-1, 5-4	2-3, 5-6
4-1437567-4	MPE206N	MPE 206N	2	2	Wire lug	ON	ON	2-1, 5-4	2-3, 5-6
4-1437567-3	MPE106F	MPE 106F	1	2	Wire lug	ON	MOM	2-1	2-3
4-1437567-2	MPE106D	MPE 106D	1	2	Wire lug	ON	ON	2-1	2-3


THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN M.BINNER	15NOVD04	 TE Connectivity	
		CHK M.ZITTO	15NOVD04		
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME ALCOSWITCH GREEN SERIES PUSHBUTTON SWITCH, MPE SERIES	
		0 PLC ± —		APVD M.ZITTO 15NOVD04	
		1 PLC ± —		PRODUCT SPEC	
		2 PLC ± —		APPLICATION SPEC	
		3 PLC ± .012			
MATERIAL		FINISH		SIZE	
—		—		CAGE CODE	
				DRAWING NO	
				RESTRICTED TO	
				A1 00779	
				C=4-1437567-3	
				—	
				CUSTOMER DRAWING	
				SCALE 3:1	
				SHEET 1 OF 3	
				REV A0	

LOC		DIST		REVISIONS				
AD		00		REV	DATE	BY	CHK	APP
				1	15NOV04	M. ZITTO		
				2	15NOV04	M. ZITTO		

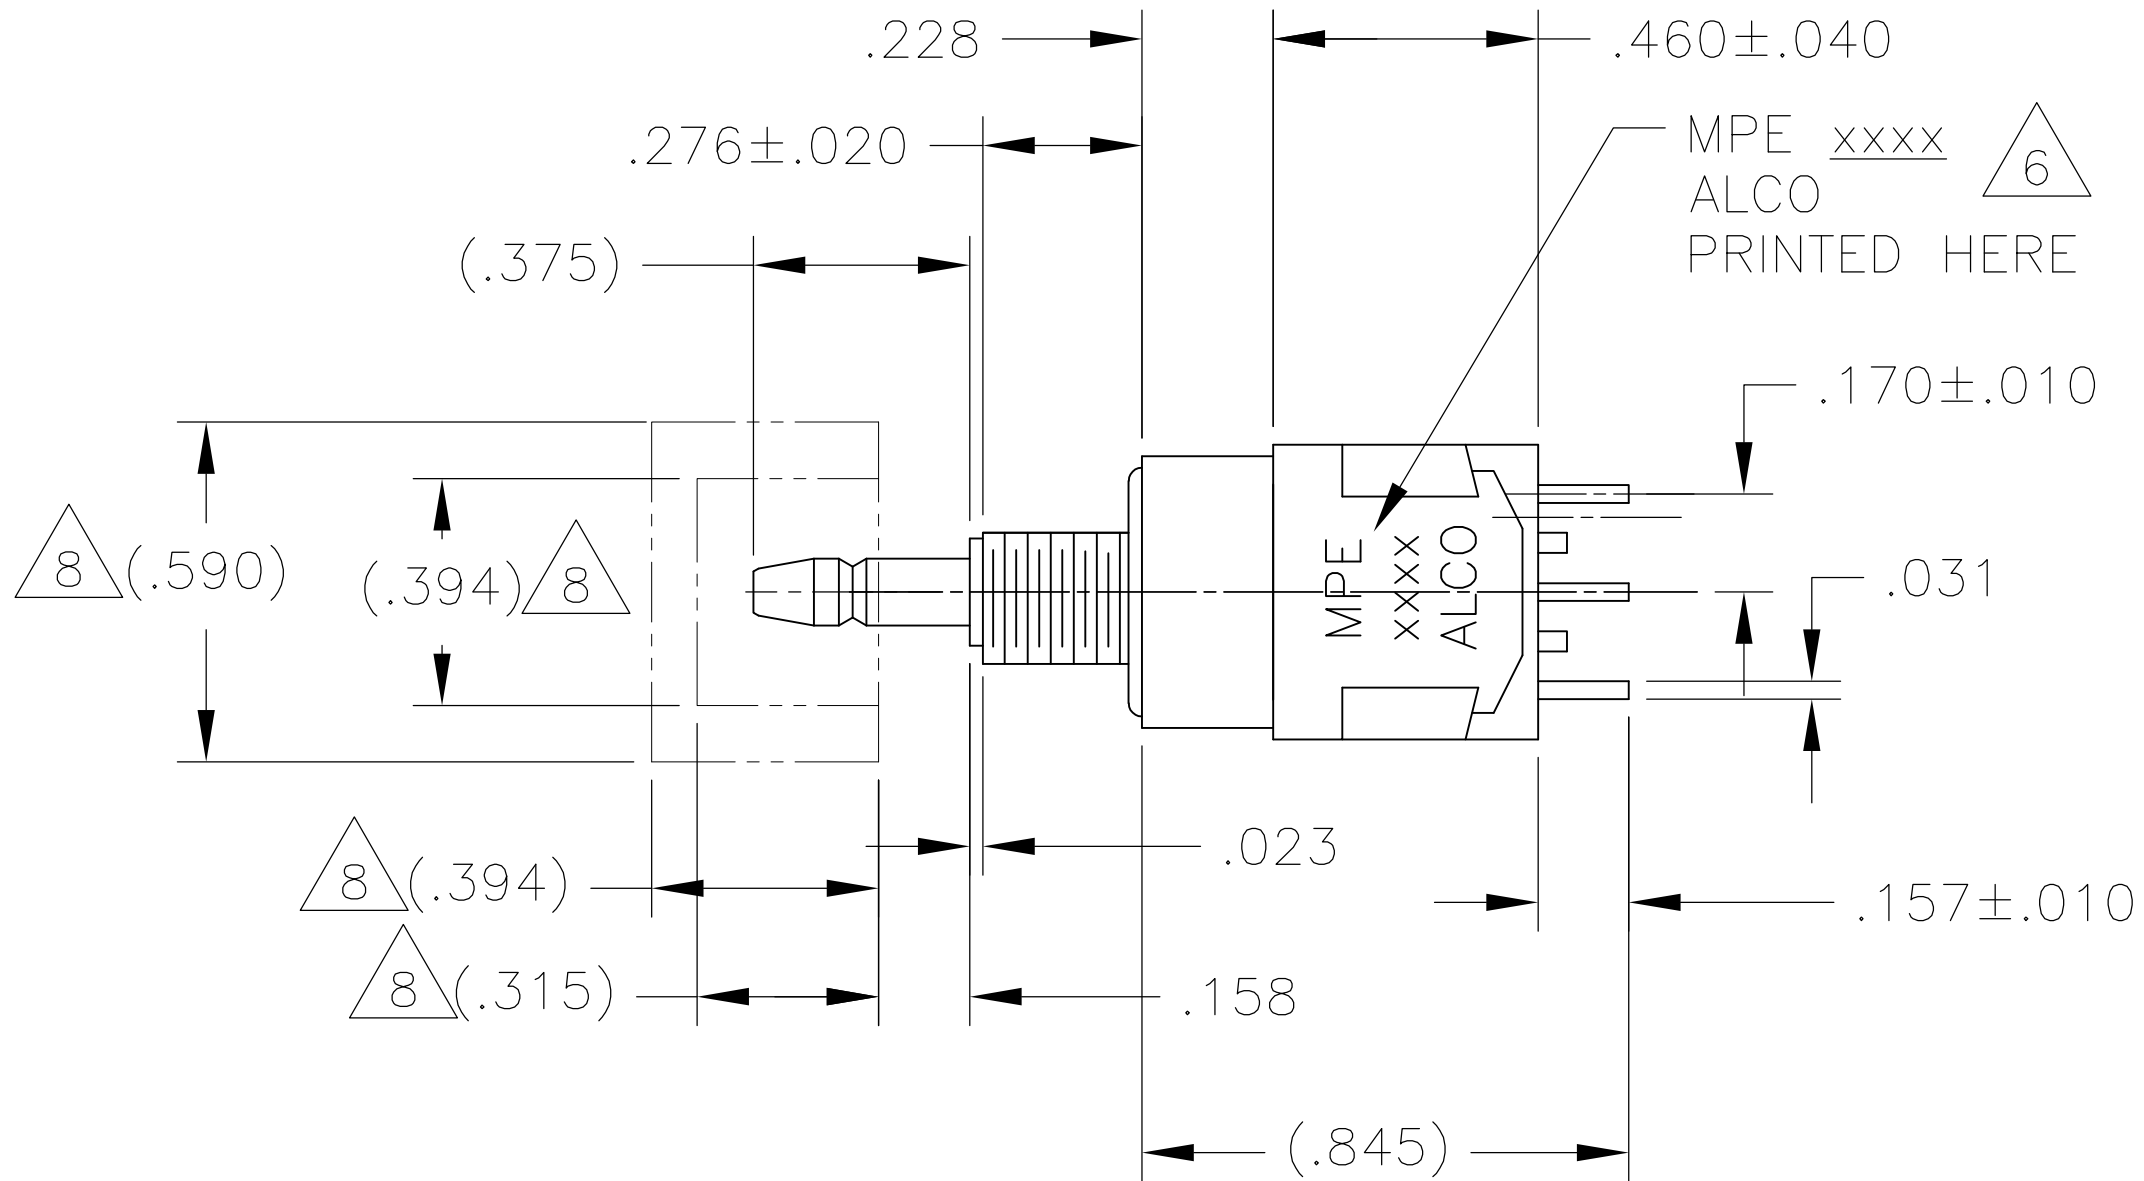


MPE-106


MPE-206

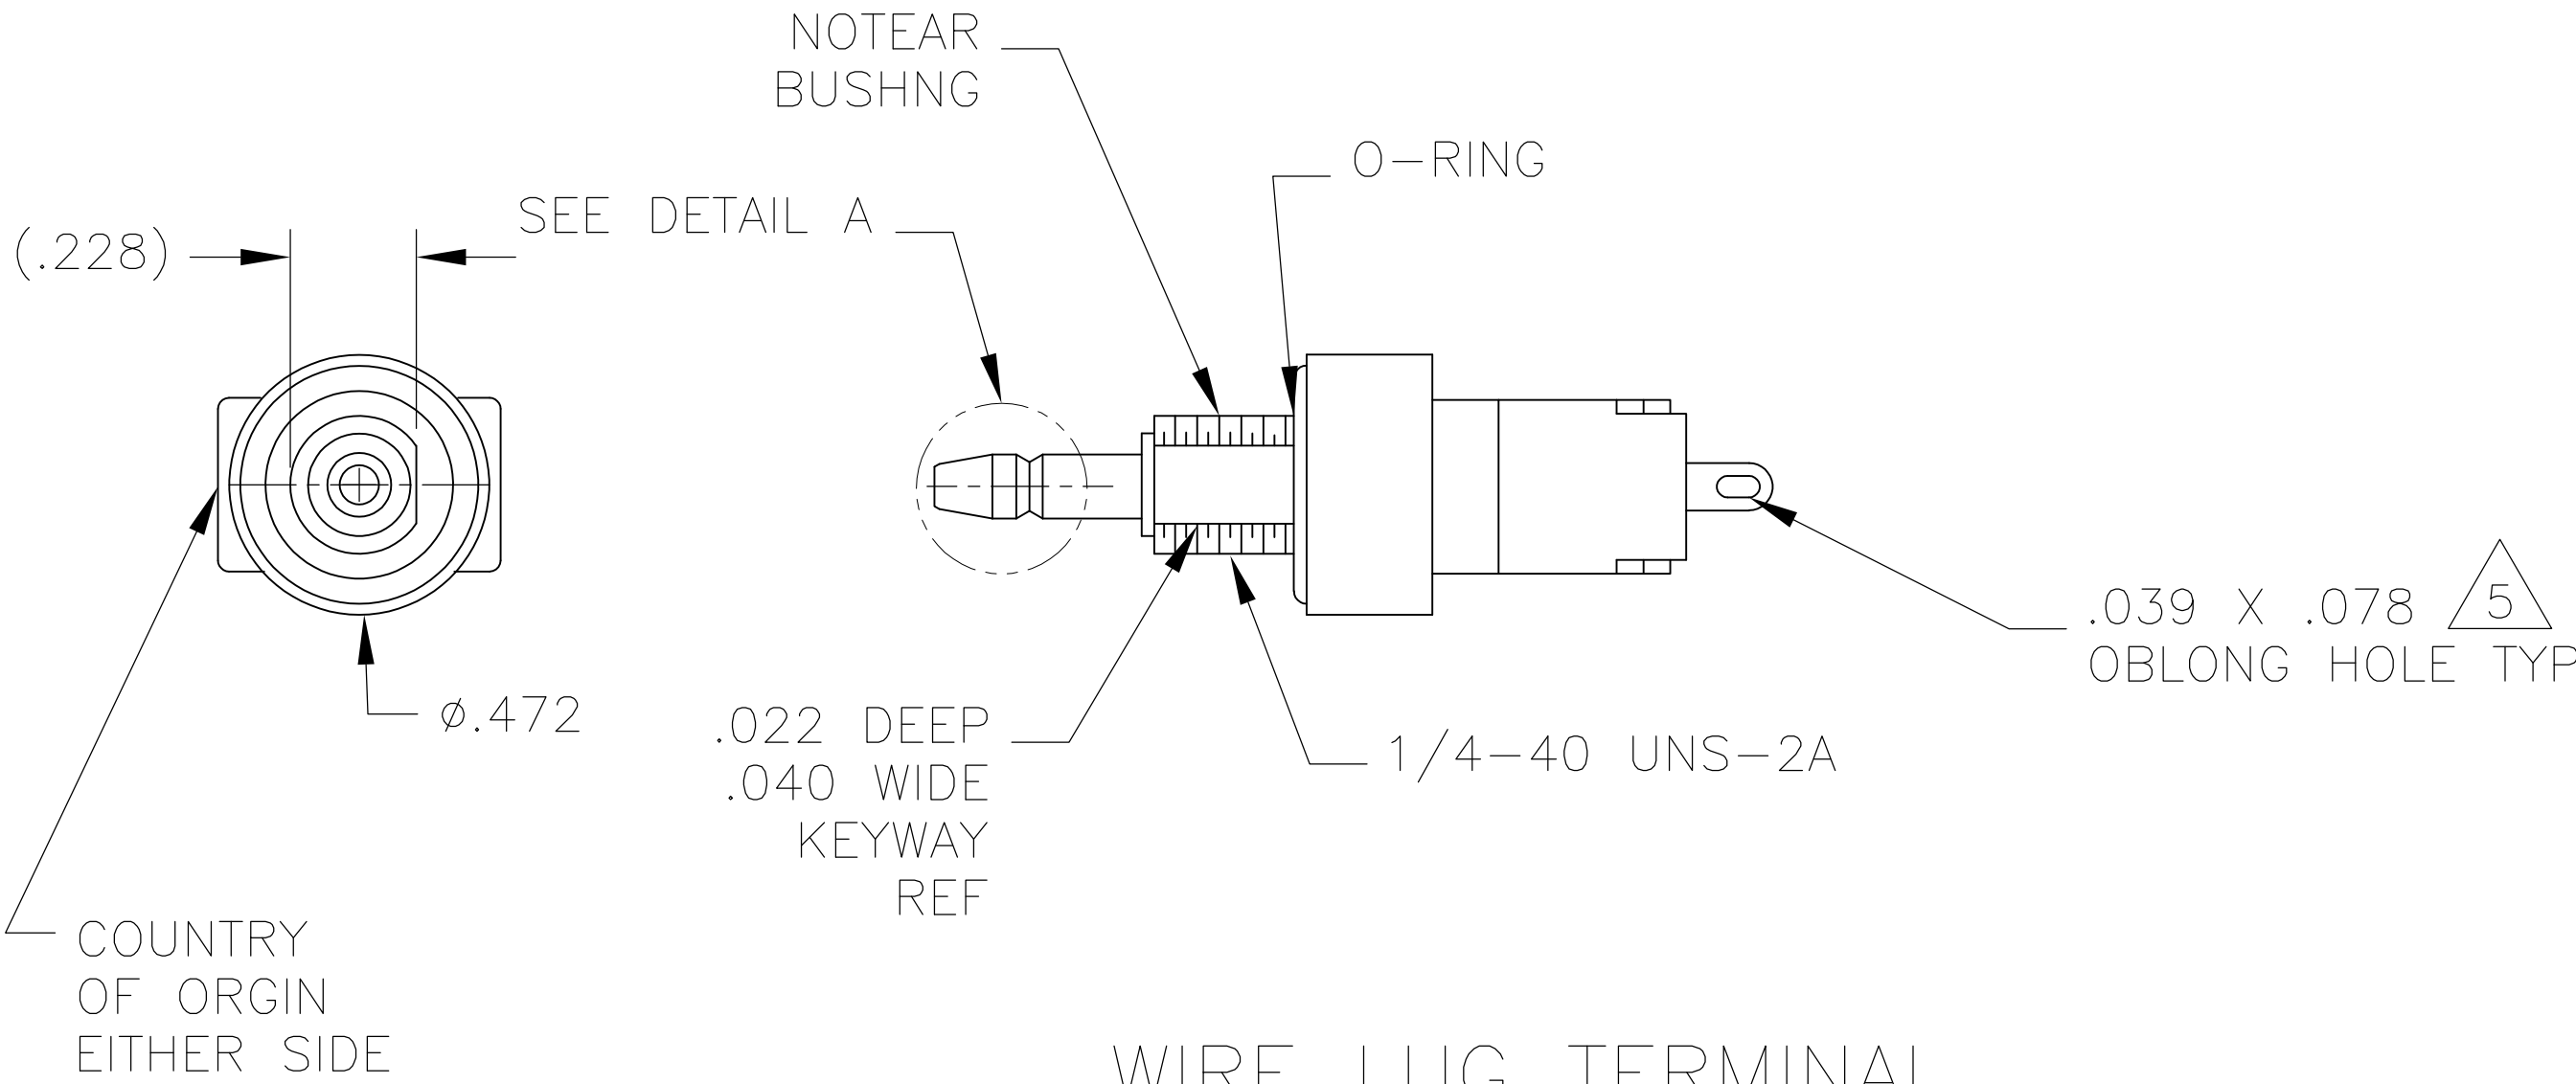

WIRE LUG TERMINAL

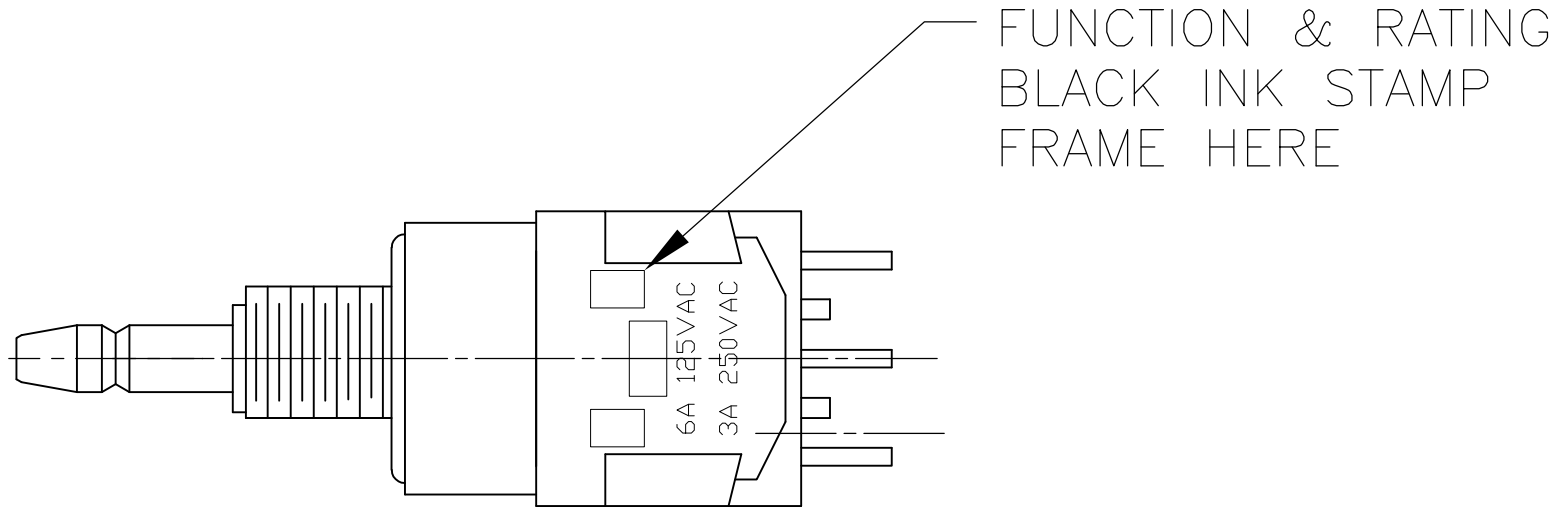

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BINNER	15NOV04	TE Connectivity	
		CHK M. ZITTO	15NOV04		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME ALCOSWITCH GREEN SERIES PUSHBUTTON SWITCH, MPE SERIES	
		0. PLC ± .012 1. PLC ± .012 2. PLC ± .012 3. PLC ± .012 4. PLC ± .012 ANGLES ± .012		APPLICATION SPEC	
MATERIAL		FINISH		WEIGHT	
-		-		-	
CUSTOMER DRAWING		SCALE 3:1		SHEET 2 OF 3	

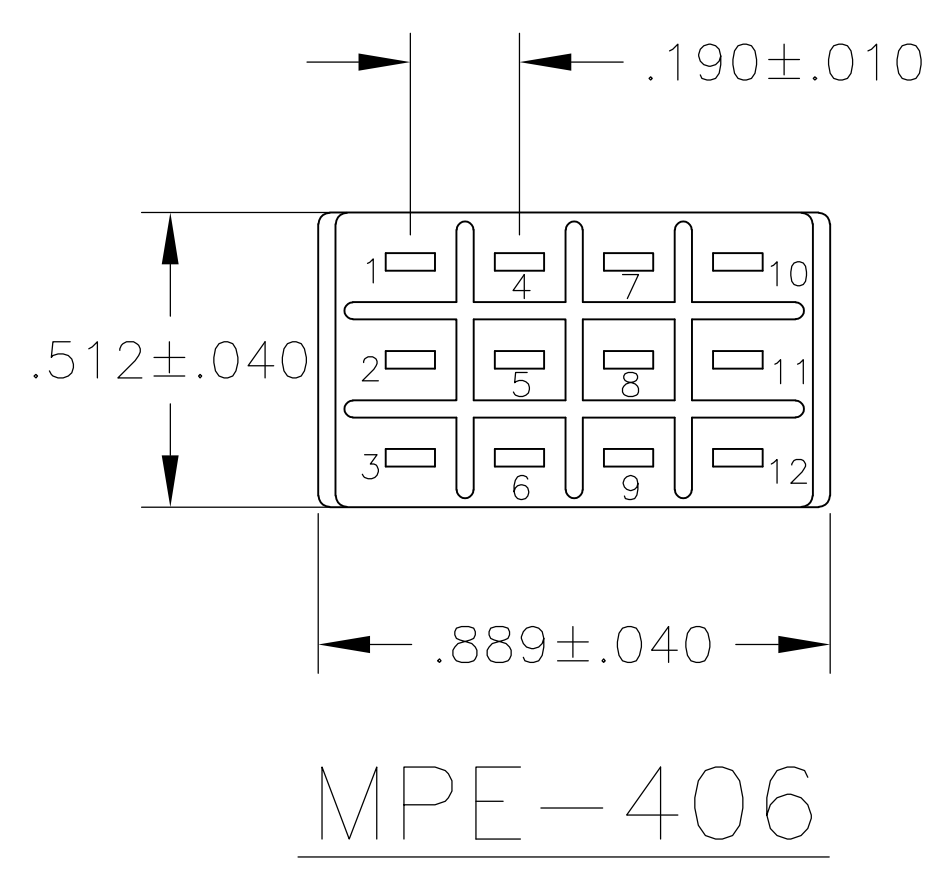

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 15NOV04 M.BINNER CHK 15NOV04 M.ZITTO APVD 15NOV04 M.ZITTO		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .012 4 PLC ± — ANGLES ± —		NAME ALCOSWITCH GREEN SERIES PUSHBUTTON SWITCH, MPE SERIES	
		PRODUCT SPEC — APPLICATION SPEC — WEIGHT —		SIZE CASE CODE DRAWING NO A1 00779 C4-1437567-3	
MATERIAL —		FINISH —		RESTRICTED TO —	
CUSTOMER DRAWING				SCALE 3:1 SHEET 3 OF 3 REV A6	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.