
REVISION HISTORY

| <u>Revision</u> | <u>Description</u> | <u>Issue Date</u> |
|-----------------|---|-------------------|
| Rev. 1.0 | Initial Issue | February 2007 |
| Rev. 1.1 | Revision of Supply current ISB1 – page 3 Commercial temp 20 μ A Industrial temp 30 μ A | March 26, 2013 |
| | Revision of Alliance Memory address | March 26, 2013 |
| Rev 1.2 | Further Revision of Supply current - page 3 Commercial temp 15 μ A Industrial temp 30 μ A IdR (data-retention current) to be 20uA - page 7 | March 23, 2016 |



32K X 8 BIT LOW POWER CMOS SRAM

FEATURES

- Access time : 55ns
- Low power consumption:
Operation current :
15mA (TYP.), $V_{CC} = 3.0V$
Standby current :
1 μ A (TYP.), $V_{CC} = 3.0V$
- Wide range power supply : 2.7 ~ 5.5V
- Fully Compatible with all Competitors 5V product
- Fully Compatible with all Competitors 3.3V product
- All inputs and outputs TTL compatible
- Fully static operation
- Tri-state output
- Data retention voltage :1.5V (MIN.)
- **All products ROHS Compliant**
- Package : 28-pin 600 mil PDIP
28-pin 330 mil SOP
28-pin 8mm x 13.4mm sTSOP


GENERAL DESCRIPTION

The AS6C62256 is a 262,144-bit low power CMOS static random access memory organized as 32,768 words by 8 bits. It is fabricated using very high performance, high reliability CMOS technology. Its standby current is stable within the range of operating temperature.

The AS6C62256 is well designed for low power application, and particularly well suited for battery back-up nonvolatile memory application.

The AS6C62256 operates with wide range power supply 2.7 ~ 5.5V

FUNCTIONAL BLOCK DIAGRAM

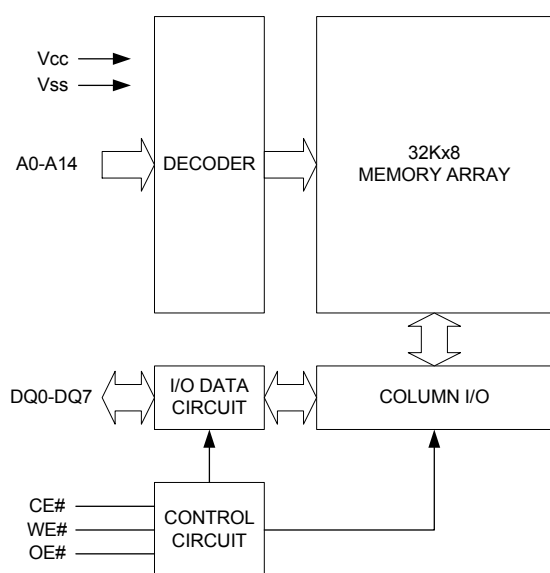


PIN DESCRIPTION

| SYMBOL | DESCRIPTION |
|-----------|---------------------|
| A0 - A14 | Address Inputs |
| DQ0 - DQ7 | Data Inputs/Outputs |
| CE# | Chip Enable Input |
| WE# | Write Enable Input |
| OE# | Output Enable Input |
| Vcc | Power Supply |
| Vss | Ground |



32K X 8 BIT LOW POWER CMOS SRAM

PIN CONFIGURATION

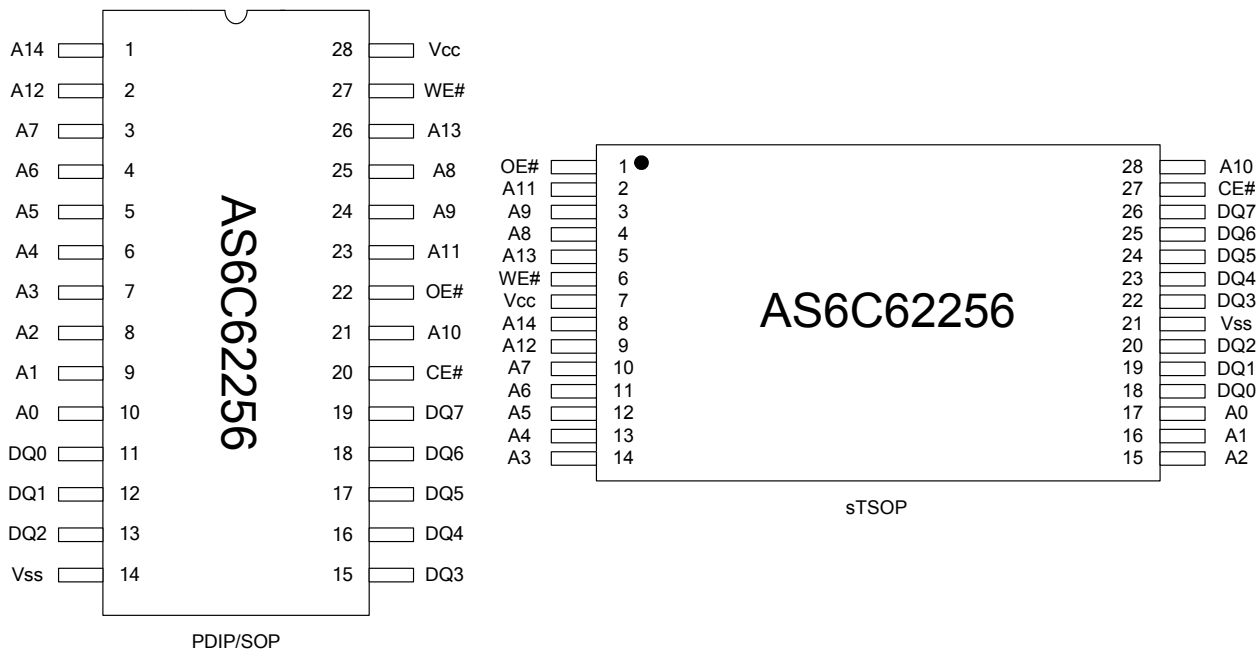

ABSOLUTE MAXIMUM RATINGS*

| PARAMETER | SYMBOL | RATING | UNIT |
|--|---------------------|--------------------|------|
| Terminal Voltage with Respect to V _{SS} | V _{TERM} | -0.5 to 7.0 | V |
| Operating Temperature | T _A | 0 to 70(C grade) | °C |
| | | -40 to 85(I grade) | °C |
| Storage Temperature | T _{STG} | -65 to 150 | |
| Power Dissipation | P _D | 1 | W |
| DC Output Current | I _{OUT} | 50 | mA |
| Soldering Temperature (under 10 sec) | T _{SOLDER} | 260 | °C |

*Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect device reliability.

TRUTH TABLE

| MODE | CE# | OE# | WE# | I/O OPERATION | SUPPLY CURRENT |
|----------------|-----|-----|-----|------------------|------------------------------------|
| Standby | H | X | X | High-Z | I _{SB} , I _{SB1} |
| Output Disable | L | H | H | High-Z | I _{CC} , I _{CC1} |
| Read | L | L | H | D _{OUT} | I _{CC} , I _{CC1} |
| Write | L | X | L | D _{IN} | I _{CC} , I _{CC1} |

Note: H = V_{IH}, L = V_{IL}, X = Don't care.



32K X 8 BIT LOW POWER CMOS SRAM

DC ELECTRICAL CHARACTERISTICS

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. ⁵ | MAX. | UNIT | |
|--|------------------------------|--|-------|-------------------|----------------------|-----------------|----|
| Supply Voltage | V _{CC} | | 2.7 | 3.3 | 5.5 | V | |
| Input High Voltage | V _{IH} ¹ | | 2.4 V | - | V _{CC} +0.5 | V | |
| Input Low Voltage | V _{IL} ² | | -0.5 | - | 0.6 | V | |
| Input Leakage Current | I _{LI} | V _{CC} ≥ V _{IN} ≥ V _{SS} | -1 | - | 1 | μA | |
| Output Leakage Current | I _{LO} | V _{CC} ≥ V _{OUT} ≥ V _{SS} , Output Disabled | -1 | - | 1 | μA | |
| Output High Voltage | V _{OH} | I _{OH} = -1mA | 2.4 | 3.0 | - | V | |
| Output Low Voltage | V _{OL} | I _{OL} = 2mA | - | - | 0.4 | V | |
| Average Operating Power supply Current | I _{CC} | Cycle time = Min. CE# = V _{IL} , I _{I/O} = 0mA | -55 | - | 15 | 45 | mA |
| | | | | | | | |
| | I _{CC1} | Cycle time = 1μs CE# ≤ 0.2V and I _{I/O} = 0mA other pins at 0.2V or V _{CC} -0.2V | - | 3 | 10 | mA | |
| Standby Power Supply Current | I _{SB} | CE# = V _{IH} | - | 1 | 3 | mA | |
| | I _{SB1} | CE# ≥ V _{CC} - 0.2V | -C | - | 1 | 15 ⁴ | μA |
| | | Others at 0.2V or V _{CC} -0.2V | -I | - | 1 | 30 ⁴ | μA |

Notes: C = Commercial Temperature I = Industrial Temperature

- V_{IH}(max) = V_{CC} + 3.0V for pulse width less than 10ns.
- V_{IL}(min) = V_{SS} - 3.0V for pulse width less than 10ns.
- Over/Undershoot specifications are characterized, not 100% tested.
- 10μA for special request
- Typical values are included for reference only and are not guaranteed or tested.
Typical values are measured at V_{CC} = V_{CC}(TYP.) and T_A = 25°C

CAPACITANCE (T_A = 25°C, f = 1.0MHz)

| PARAMETER | SYMBOL | MIN. | MAX | UNIT |
|--------------------------|------------------|------|-----|------|
| Input Capacitance | C _{IN} | - | 6 | pF |
| Input/Output Capacitance | C _{I/O} | - | 8 | pF |

Note : These parameters are guaranteed by device characterization, but not production tested.

AC TEST CONDITIONS

| | |
|--|---|
| Input Pulse Levels | 0.2V to V _{CC} - 0.2V |
| Input Rise and Fall Times | 3ns |
| Input and Output Timing Reference Levels | 1.5V |
| Output Load | C _L = 50pF + 1TTL, I _{OH} /I _{OL} = -1mA/2mA |



AC ELECTRICAL CHARACTERISTICS

(1) READ CYCLE

| PARAMETER | SYM | AS6C62256-55 | | UNIT |
|------------------------------------|--------------------|--------------|------|------|
| | | MIN. | MAX. | |
| Read Cycle Time | t _{RC} | 55 | - | ns |
| Address Access Time | t _{AA} | - | 55 | ns |
| Chip Enable Access Time | t _{ACE} | - | 55 | ns |
| Output Enable Access Time | t _{OE} | - | 30 | ns |
| Chip Enable to Output in Low-Z | t _{CLZ} * | 10 | - | ns |
| Output Enable to Output in Low-Z | t _{OLZ} * | 5 | - | ns |
| Chip Disable to Output in High-Z | t _{CHZ} * | - | 20 | ns |
| Output Disable to Output in High-Z | t _{OHZ} * | - | 20 | ns |
| Output Hold from Address Change | t _{OH} | 10 | - | ns |

(2) WRITE CYCLE


| PARAMETER | SYM | AS6C62256-55 | | UNIT |
|----------------------------------|--------------------|--------------|------|------|
| | | MIN. | MAX. | |
| Write Cycle Time | t _{WC} | 55 | - | ns |
| Address Valid to End of Write | t _{AW} | 50 | - | ns |
| Chip Enable to End of Write | t _{CW} | 50 | - | ns |
| Address Set-up Time | t _{AS} | 0 | - | ns |
| Write Pulse Width | t _{WP} | 45 | - | ns |
| Write Recovery Time | t _{WR} | 0 | - | ns |
| Data to Write Time Overlap | t _{DW} | 25 | - | ns |
| Data Hold from End of Write Time | t _{DH} | 0 | - | ns |
| Output Active from End of Write | t _{OW} * | 5 | - | ns |
| Write to Output in High-Z | t _{WHZ} * | - | 20 | ns |

*These parameters are guaranteed by device characterization, but not production tested.




TIMING WAVEFORMS

READ CYCLE 1 (Address Controlled) (1,2)

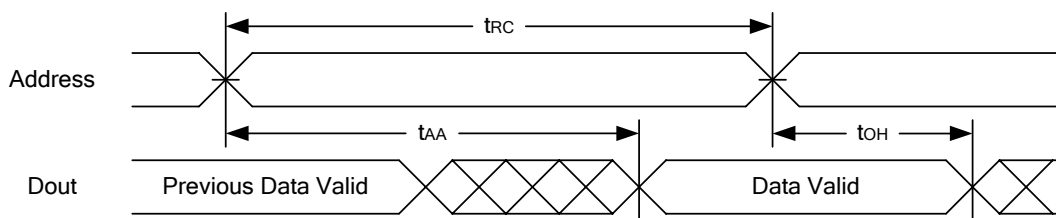

READ CYCLE 2 (CE# and OE# Controlled) (1,3,4,5)

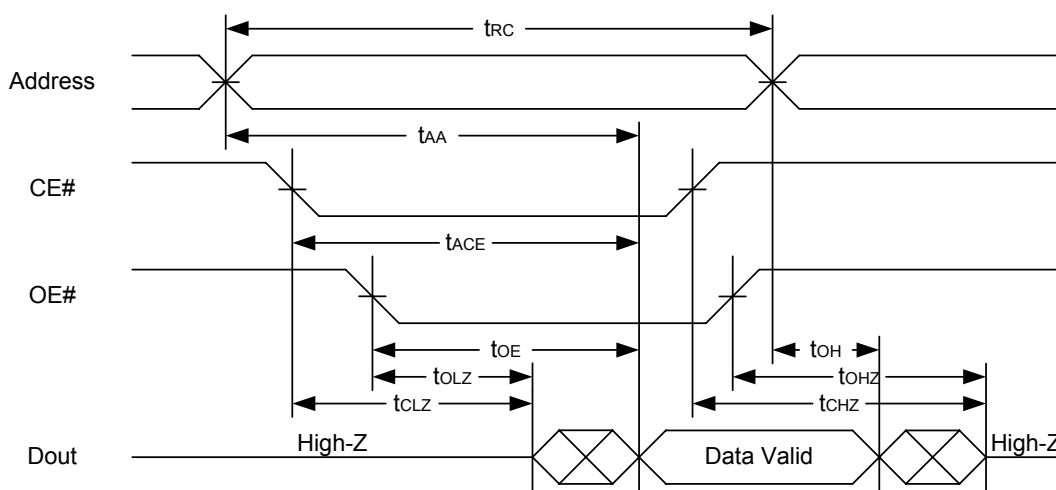


Notes :

1. WE# is high for read cycle.
2. Device is continuously selected OE# = low, CE# = low.
3. Address must be valid prior to or coincident with CE# = low,; otherwise t_{AA} is the limiting parameter.
4. t_{CLZ} , t_{OLZ} , t_{OCHZ} and t_{OCHZ} are specified with $C_L = 5pF$. Transition is measured $\pm 500mV$ from steady state.
5. At any given temperature and voltage condition, t_{CHZ} is less than t_{CLZ} , t_{OHZ} is less than t_{OLZ} .




32K X 8 BIT LOW POWER CMOS SRAM

WRITE CYCLE 1 (WE# Controlled) (1,2,3,5,6)

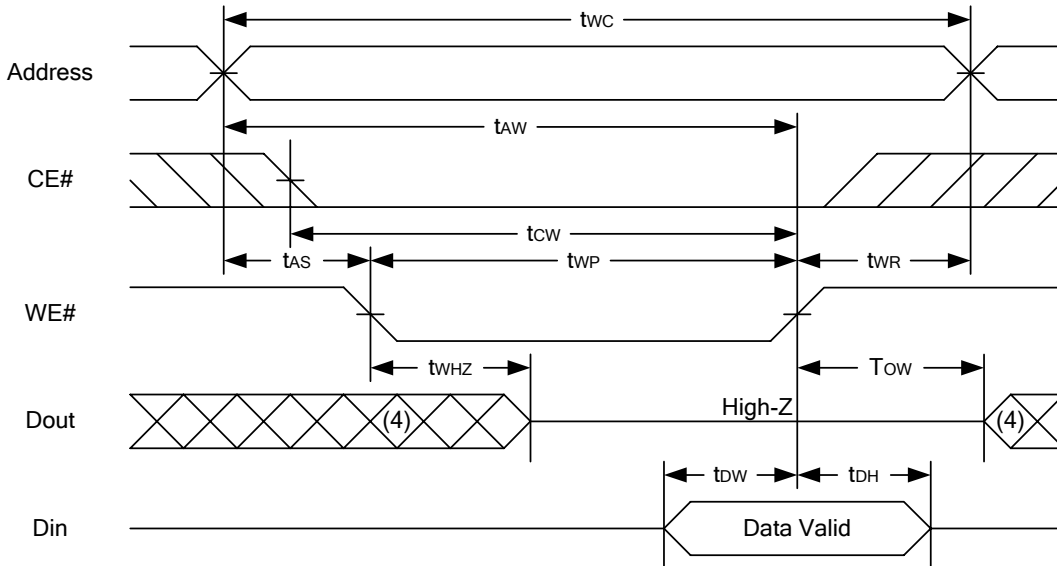

WRITE CYCLE 2 (CE# Controlled) (1,2,5,6)

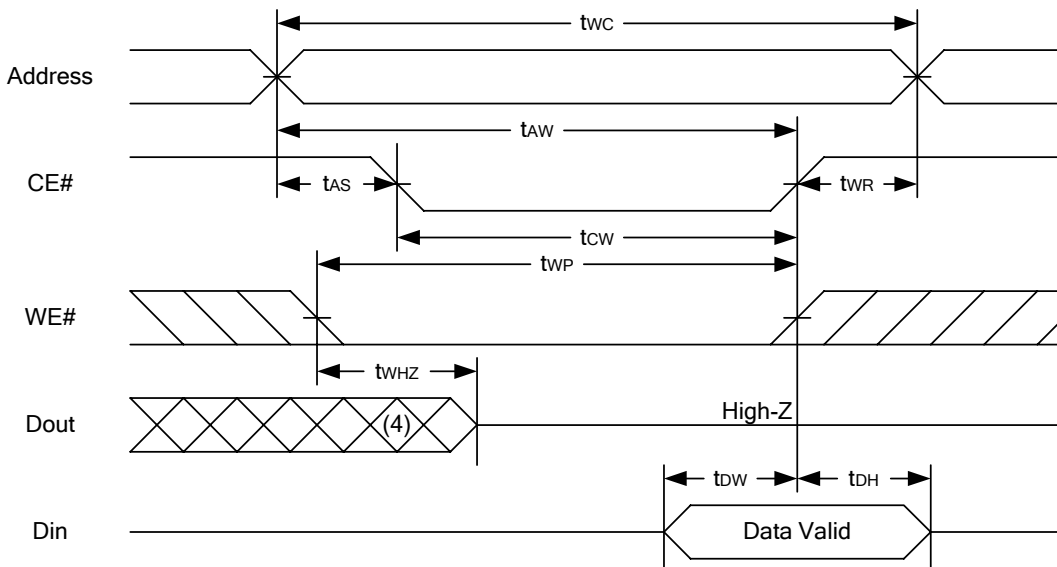

Notes :

1. WE#, CE# must be high during all address transitions.
2. A write occurs during the overlap of a low CE#, low WE#.
3. During a WE# controlled write cycle with OE# low, t_{wp} must be greater than $t_{whz} + t_{dw}$ to allow the drivers to turn off and data to be placed on the bus.
4. During this period, I/O pins are in the output state, and input signals must not be applied.
5. If the CE# low transition occurs simultaneously with or after WE# low transition, the outputs remain in a high impedance state.
6. t_{ow} and t_{whz} are specified with $C_L = 5pF$. Transition is measured $\pm 500mV$ from steady state.




32K X 8 BIT LOW POWER CMOS SRAM

DATA RETENTION CHARACTERISTICS

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|-------------------------------------|------------------|--|-------------------|------|------|------|
| V _{CC} for Data Retention | V _{DR} | CE# ≥ V _{CC} - 0.2V | 1.5 | - | 5.5 | V |
| Data Retention Current | I _{DR} | V _{CC} = 2.0V CE# ≥ V _{CC} - 0.2V | - | 0.5 | 20 | μA |
| Chip Disable to Data Retention Time | t _{CDR} | See Data Retention Waveforms (below) | 0 | - | - | ns |
| Recovery Time | t _R | | t _{RC} * | - | - | ns |

*t_{RC} = Read Cycle Time

DATA RETENTION WAVEFORM

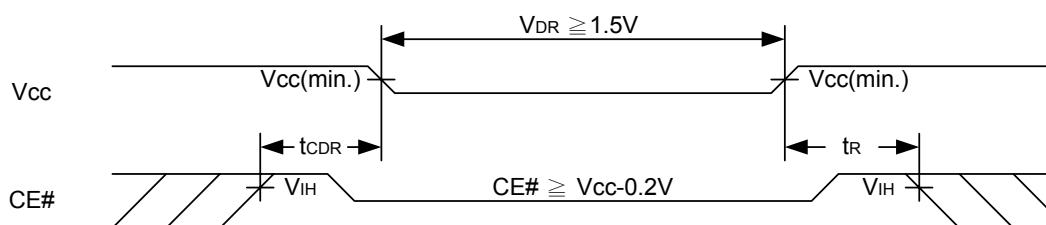




32K X 8 BIT LOW POWER CMOS SRAM

PACKAGE OUTLINE DIMENSION

28 pin 600 mil PDIP Package Outline Dimension

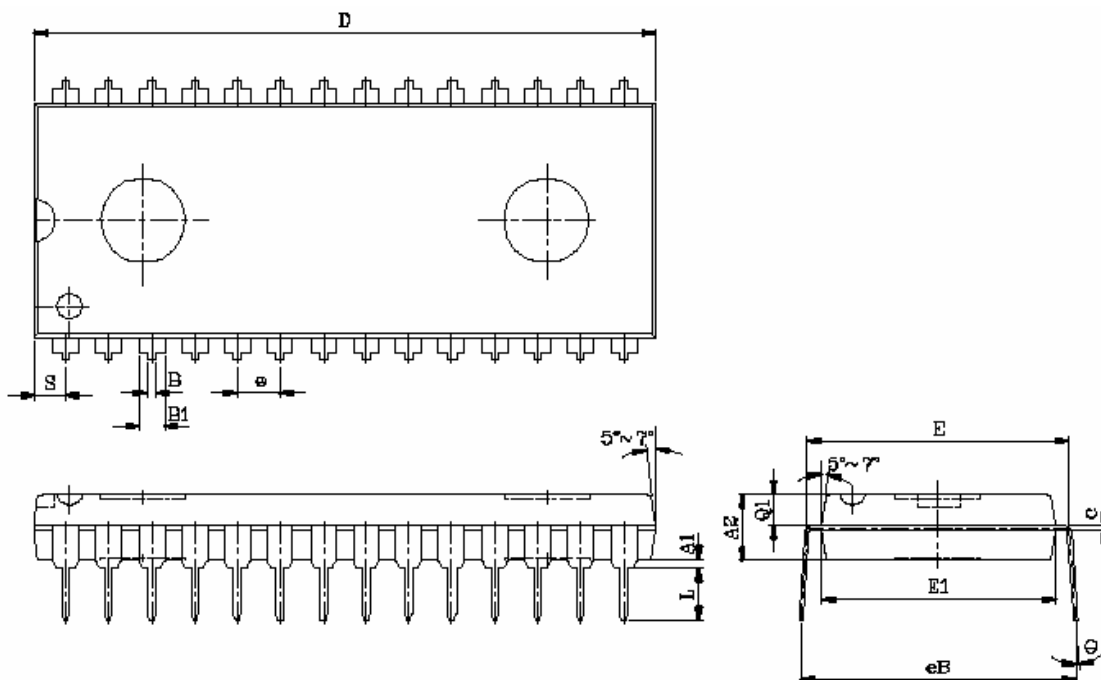


| SYM. | UNIT | INCH.(BASE) | MM(REF) |
|------|------|-------------|--------------|
| A1 | | 0.010 (MIN) | 0.254 (MIN) |
| A2 | | 0.150±0.005 | 3.810±0.127 |
| B | | 0.020 (MAX) | 0.508(MAX) |
| B1 | | 0.055 (MAX) | 1.397(MAX) |
| c | | 0.012 (MAX) | 0.304 (MAX) |
| D | | 1.430 (MAX) | 36.322 (MAX) |
| E | | 0.6 (TYP) | 15.24 (TYP) |
| E1 | | 0.52 (MAX) | 13.208 (MAX) |
| e | | 0.100 (TYP) | 2.540(TYP) |
| eB | | 0.625 (MAX) | 15.87 (MAX) |
| L | | 0.180(MAX) | 4.572(MAX) |
| S | | 0.06 (MAX) | 1.524 (MAX) |
| Q1 | | 0.08(MAX) | 2.032(MAX) |
| Θ | | 15°(MAX) | 15°(MAX) |



32K X 8 BIT LOW POWER CMOS SRAM

28 pin 330 mil SOP Package Outline Dimension

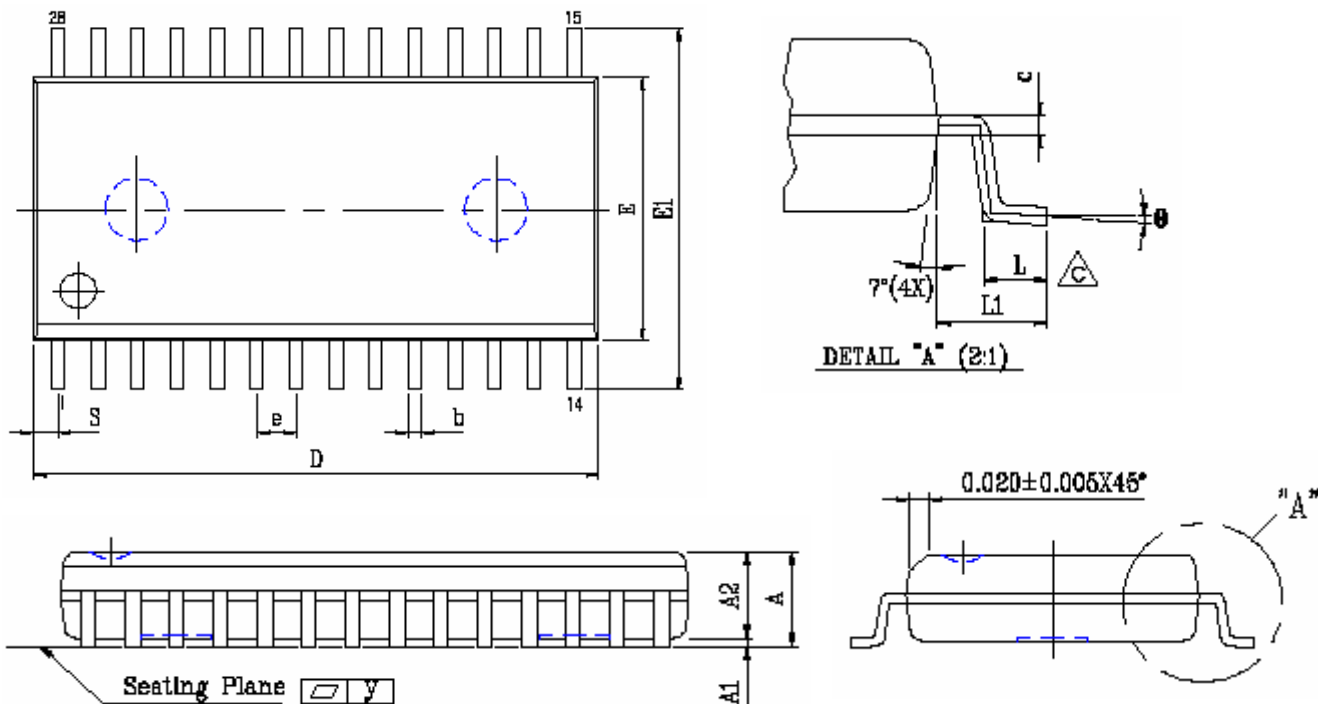


| SYM. | UNIT | INCH(BASE) | MM(REF) |
|------|------|-------------|--------------|
| A | | 0.120 (MAX) | 3.048 (MAX) |
| A1 | | 0.002(MIN) | 0.05(MIN) |
| A2 | | 0.098±0.005 | 2.489±0.127 |
| b | | 0.016 (TYP) | 0.406(TYP) |
| c | | 0.010 (TYP) | 0.254(TYP) |
| D | | 0.728 (MAX) | 18.491 (MAX) |
| E | | 0.340 (MAX) | 8.636 (MAX) |
| E1 | | 0.465±0.012 | 11.811±0.305 |
| e | | 0.050 (TYP) | 1.270(TYP) |
| L | | 0.05 (MAX) | 1.270 (MAX) |
| L1 | | 0.067±0.008 | 1.702 ±0.203 |
| S | | 0.047 (MAX) | 1.194 (MAX) |
| y | | 0.003(MAX) | 0.076(MAX) |
| θ | | 0°~10° | 0°~10° |



32K X 8 BIT LOW POWER CMOS SRAM

28 pin 8mm x 13.4mm sTSSOP Package Outline Dimension

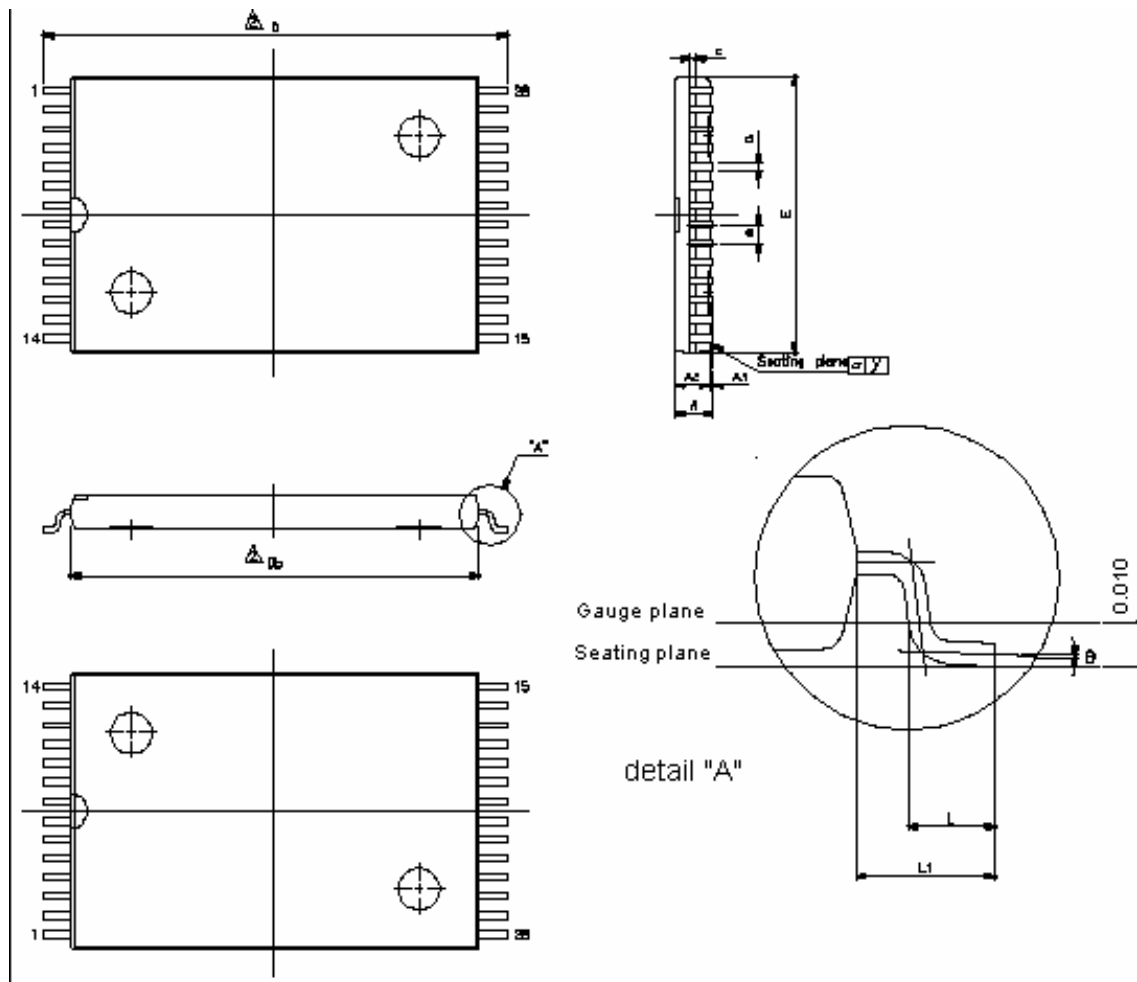

| SYM. | UNIT | INCH(BASE) | MM(REF) |
|------|------|--------------|------------|
| A | | 0.047 (MAX) | 1.20 (MAX) |
| A1 | | 0.004±0.002 | 0.10±0.05 |
| A2 | | 0.039±0.002 | 1.00±0.05 |
| b | | 0.006 (TYP) | 0.15(TYP) |
| c | | 0.010 (TYP) | 0.254(TYP) |
| Db | | 0.465±0.004 | 11.80±0.10 |
| E | | 0.315±0.004 | 8.00±0.10 |
| e | | 0.022 (TYP) | 0.55(TYP) |
| D | | 0.528±0.008 | 13.40±0.20 |
| L | | 0.020±0.004 | 0.50±0.10 |
| L1 | | 0.0315±0.004 | 0.80±0.10 |
| y | | 0.08(MAX) | 0.003(MAX) |
| θ | | 0°~5° | 0°~5° |

Note : E dimension is not including end flash. The total of both sides' end flash is not above 0.3mm.



32K X 8 BIT LOW POWER CMOS SRAM

ORDERING INFORMATION


Ordering Codes

| Alliance | Organization | VCC range | Package | Operating Temp | Speed ns |
|------------------|--------------|-----------|---------------------------|---------------------------------|----------|
| AS6C62256-55PCN | 32k x 8 | 2.7-5.5V | 28pin 600mil PDIP | Commercial ~ 0° C to 70° C | 55 |
| AS6C62256-55SCN | 32k x 8 | 2.7-5.5V | 28pin 330mil SOP | Commercial ~ 0° C to 70° C | 55 |
| AS6C62256-55SIN | 32k x 8 | 2.7-5.5V | 28pin 330mil SOP | Industrial ~ -40° C to 85° C | 55 |
| AS6C62256-55STCN | 32k x 8 | 2.7-5.5V | 28pin sTSOP (8 x 13.4 mm) | Commercial ~ 0° C to 70° C | 55 |
| AS6C62256-55STIN | 32k x 8 | 2.7-5.5V | 28pin sTSOP (8 x 13.4 mm) | Industrial ~ -40° C to 85° C | 55 |

Part numbering system

| AS6C | 62256 | - 55 | X | X | N |
|-----------------------|------------------------|-------------|---|---|-----------------------------------|
| low power SRAM prefix | Device Number 62256 | Access Time | Package Options: P = 28 pin 600 mil P-DIP S = 28 pin 330 mil SOP ST = 28 pin sTSOP (8mm x 13.4 mm) | Temperature Range: C = Commercial (0°C to +70° C) I = Industrial (-40° to +85° C) | N = Lead Free ROHS Compliant Part |

Rev 1.2



Alliance Memory, Inc.

511 Taylor Way, Suite#1,
San Carlos, CA 94070 Tel:

+1 650-610-6800

Fax: +1 650-620-9211

www.alliancememory.com

Copyright © Alliance Memory

All Rights Reserved

Part Number: AS6C62256

Document Version: v. 1.2

© Copyright 2003 Alliance Memory, Inc. All rights reserved. Our three-point logo, our name and Intelliwatt are trademarks or registered trademarks of Alliance. All other brand and product names may be the trademarks of their respective companies. Alliance reserves the right to make changes to this document and its products at any time without notice. Alliance assumes no responsibility for any errors that may appear in this document. The data contained herein represents Alliance's best data and/or estimates at the time of issuance. Alliance reserves the right to change or correct this data at any time, without notice. If the product described herein is under development, significant changes to these specifications are possible. The information in this product data sheet is intended to be general descriptive information for potential customers and users, and is not intended to operate as, or provide, any guarantee or warranty to any user or customer. Alliance does not assume any responsibility or liability arising out of the application or use of any product described herein, and disclaims any express or implied warranties related to the sale and/or use of Alliance products including liability or warranties related to fitness for a particular purpose, merchantability, or infringement of any intellectual property rights, except as express agreed to in Alliance's Terms and Conditions of Sale (which are available from Alliance). All sales of Alliance products are made exclusively according to Alliance's Terms and Conditions of Sale. The purchase of products from Alliance does not convey a license under any patent rights, copyrights; mask works rights, trademarks, or any other intellectual property rights of Alliance or third parties. Alliance does not authorize its products for use as critical components in life-supporting systems where a malfunction or failure may reasonably be expected to result in significant injury to the user, and the inclusion of Alliance products in such life-supporting systems implies that the manufacturer assumes all risk of such use and agrees to indemnify Alliance against all claims arising from such use.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.