

## Type SQ Series

### Key Features

- Choice of Styles
- Bracketed Types Available
- Temp. Op. -55°C to +250°C
- Wide Value Range
- Stable TCR 300ppm/°C
- Custom Designs Welcome
- Inorganic Flame Proof Construction




This flexible range of Power Wirewound Resistors either have wire or power oxide film elements. The SQ series resistors are wound or deposited on a fine non - alkali ceramic core then embodied in a ceramic case and sealed with an inorganic silica filler. This design provides a resistor with high insulation resistance, low surface temperature, excellent T.C.R., and entirely fire proof construction. These resistors are ideally suited to a range of areas where low cost, and efficient thermal performance are important design criteria. Metal film cores adjusted by laser spiral are used where the resistor value is above that suited to wire. Similar performance is obtained although short time overload is slightly derated.

### Characteristics - Electrical

|                                      | Test Condition                                     | Performance |
|--------------------------------------|--|-------------|
| <b>Resistance Temp. Coefficient:</b> | -55°C ~ 155°C                                      | ± 300ppm/°C |
| <b>*Short Time Overload:</b>         | 10 times rated power for 5 seconds                 | ± 2%        |
| <b>Rated Load:</b>                   | Rated power for 30 minutes                         | ± 1%        |
| <b>Voltage Withstand:</b>            | 1000V AC 1 minute                                  | no change   |
| <b>Insulation Resistance:</b>        | 500V megger  | 1000 Meg    |
| <b>Temperature Cycle:</b>            | -30°C ~ 85°C for 5 cycles                          | ± 1%        |
| <b>Load Life:</b>                    | 70°C on-off cycle for 1000 hours                   | ± 5%        |
| <b>Moisture-proof Load Life:</b>     | 40°C 95% RH on-off cycle 1000 hours                | ± 5%        |
| <b>Incombustibility:</b>             | 16 times rated wattage for 5 minutes               | No flame    |
| <b>Max. Overload Voltage:</b>        | 2 times max. working voltage                       |             |
| <b>*Metal Film Elements:</b>         | Short time overload 5 times rated power, 5 seconds |             |

### Type SQP - Horizontal

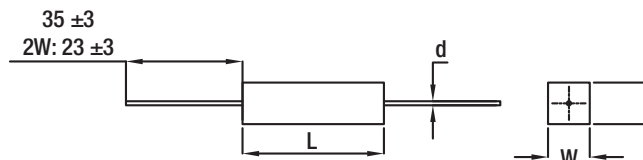

| Power Rating | Dimensions |       |         |          |         | Resistance Range |             | Max. Working Voltage |
|--------------|------------|-------|---------|----------|---------|------------------|-------------|----------------------|
|              | W ± 1      | H ± 1 | L ± 1.5 | d ± 0.05 | l ± 0.3 | Wire             | Metal Film  |                      |
| 2W           | 7          | 7     | 18      | 0.65     | 23      | R10 - 82R        | 83R - 10K   | 150V                 |
| 3W           | 8          | 8     | 22      | 0.8      | 35      | R10 - 180R       | 181R - 33K  | 350V                 |
| 5W           | 10         | 9     | 22      | 0.8      | 35      | R10 - 180R       | 181R - 100K | 350V                 |
| 7W           | 10         | 9     | 35      | 0.8      | 35      | R10 - 430R       | 431R - 100K | 500V                 |
| 10W          | 10         | 9     | 48      | 0.8      | 35      | R10 - 470R       | 471R - 100K | 750V                 |
| 15W          | 12.5       | 11.5  | 48      | 0.8      | 35      | R50 - 600R       | 601R - 150K | 1000V                |
| 20W - 25W    | 14         | 13.5  | 60      | 0.8      | 35      | R50 - 1K0        | 1.1K - 150K | 1000V                |

Rated Continuous Working Voltage (RCWV)  
 RCWV:  $\sqrt{\text{Rated Power} \times \text{Resistance Value}}$  or Maximum Working Voltage listed above whichever is lower

## Type SQ Series

### Type SQH - Horizontal with Faston Connectors



| Power Rating | Dimensions |       |         |        |        |         |          |          | Resistance Range |            |
|--------------|------------|-------|---------|--------|--------|---------|----------|----------|------------------|------------|
|              | W ± 1      | H ± 1 | L ± 1.5 | P      | H1 ± 1 | D ± 0.5 | P1 ± 0.2 | P2 ± 0.2 | Wire             | Metal Film |
| 10W          | 10         | 10    | 48      | 32 ± 1 | 21     | 5       | 2.5      | 1.7      | R50 - 600R       | 601R - 50K |
| 15W          | 12.5       | 11.5  | 48      | 32 ± 1 | 21     | 5       | 2.5      | 1.7      | 1R0 - 600R       | 601R - 50K |
| 20W          | 14.5       | 13.5  | 60      | 42 ± 1 | 24     | 6       | 3.0      | 2.5      | 1R0 - 1K0        | 1K1 - 50K  |
| 30W          | 19         | 19    | 75      | 55 ± 2 | 31     | 7.5     | -        | -        | 1R0 - 2K0        | -          |
| 40W          | 19         | 19    | 90      | 67 ± 2 | 31     | 7.5     | -        | -        | 1R0 - 2K0        | -          |

### Type SQB - Horizontal with Faston Connectors and Bracket

| Power Rating | Dimensions |         |         |         |
|--------------|------------|---------|---------|---------|
|              | A ± 0.5    | B ± 0.5 | C ± 0.5 | G ± 0.5 |
| 10W          | 8.0        | 5.0     | 12.0    | 3.0     |
| 15W          | 8.0        | 5.5     | 12.0    | 3.0     |
| 20W          | 8.0        | 5.5     | 12.0    | 3.0     |
| 30W          | 10.5       | 8.0     | 18.0    | 3.5     |
| 40W          | 10.5       | 8.0     | 18.0    | 3.5     |



### Power Derating Curve



### Load Against Temperature



### Type SQM - Vertical



| Power Rating | Dimensions |       |         |         | Resistance Range |             |
|--------------|------------|-------|---------|---------|------------------|-------------|
|              | W ± 1      | H ± 1 | S ± 1.5 | P ± 2.0 | Wire             | Metal Film  |
| 2W           | 11         | 20    | 7       | 5       | R10 - 82R        | 83R - 10K   |
| 3W           | 12         | 25    | 8       | 5       | R10 - 180R       | 181R - 33K  |
| 5W           | 13         | 25    | 9       | 5       | R10 - 180R       | 181R - 100K |
| 7W           | 13         | 39    | 9       | 5       | R10 - 430R       | 431R - 100K |
| 10W          | 13         | 51    | 9       | 5       | R10 - 470R       | 471R - 100K |
| 10WS         | 16         | 35    | 12      | 7.5     | R10 - 360R       | 361R - 100K |

N.B. Custom design versions in wire at low tolerances, better T.C.R., and higher ohmic values are available to special order. Please enquire.

## Type SQ Series

### Type SPS - Vertical Mounting with Stabilising Bracket



| Power Rating | Dimension |         | Resistance Range |             |
|--------------|-----------|---------|------------------|-------------|
|              | L ± 1.5   | K ± 0.5 | Wire             | Metal Film  |
| 7W           | 48        | 8.5     | R10 - 430R       | 431R - 100K |
| 10W          | 60        | 20      | R10 - 470R       | 471R - 100K |

### Type SQZ - Horizontal Pluggable



| Power Rating | Dimensions |     |       |       |     |    |    |     |      |      | Resistance Range |             |
|--------------|------------|-----|-------|-------|-----|----|----|-----|------|------|------------------|-------------|
|              | W±1        | H±1 | L±1.5 | P±1.5 | P1  | P2 | P3 | P4  | H1±1 | H2±1 | Wire             | Metal Film  |
| 5W           | 10         | 10  | 28    | 15    | 4.2 | 2  | 5  | 1.5 | 25   | 10.5 | R10 - 130R       | 131R - 100K |
| 7W           | 10         | 10  | 36    | 20    | 4.2 | 2  | 5  | 1.5 | 25   | 10.5 | R10 - 430R       | 431R - 100K |
| 10W          | 10         | 10  | 48    | 32    | 4.2 | 2  | 5  | 1.5 | 25   | 10.5 | R20 - 470R       | 471R - 100K |
| 15W          | 12.5       | 12  | 48    | 32    | 4.2 | 2  | 5  | 1.5 | 26   | 10.5 | 1R0 - 600R       | 601R - 150K |
| 20W-25W*     | 15         | 13  | 60    | 42    | 7   | 6  | 10 | 2.7 | 36   | 15.0 | 1R0 - 1K0        | 1K1 - 150K  |

\*NB: 20W & 25W Devices Terminations are not crimped

### Type SQZ - Recommended PCB Hole Dimensions

| Power Rating | a   | b   | p  |
|--------------|-----|-----|----|
| 5W           | 2.0 | 0.8 | 15 |
| 7W           | 2.0 | 0.8 | 20 |
| 10W          | 2.0 | 0.8 | 32 |
| 15W          | 2.0 | 0.8 | 32 |
| 20W_25W      | 3.5 | 1.0 | 42 |



### How to Order

| SQP   | W                              | 20  | 1R0   | F   |
|---|--------------------------------|---|---|---|
| Common Part   | Element                        | Rated Power   | Resistance Value  | Resistance Tolerance                                  |
| SQP - Axial Type<br>SQZ - Pluggable Type<br>SQM - Vertical Type<br>SPS - Vertical Type<br>SQH - Horizontal Type<br>SQB - Horizontal Type (with bracket) | W - Wire<br><br>R - Metal Film | 2 - 2 Watts<br><br>3 - 3 Watts<br><br>5 - 5 Watts etc | 0.1 ohm (1 milliohm) R10<br>1 ohm (1000 milliohms) 1R0<br>1K ohm (1000 ohms) 1K0<br>1M ohm (1000000 ohms) 1M0 | F - ±1%<br><br>G - ±2%<br><br>J - ±5%<br><br>K - ±10% |

TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks. Other logos, product and Company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this datasheet, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this datasheet are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.