lumbergautomation
A BELDEN BRAND

M12-Round-Plug Connector, Double-Ended Cordsets, According to IEC 61076-2-101

RST -RKT I RST-RKWT

3-, 4-, 5- and 8-Poles

Actuator/sensor cordset, double-ended, M12, 3-, 4-, 5- and 8-poles, male straight to female straight connector with self-locking thread and molded TPE, PUR, or PVC cable, IEC color code.

RST-RKT



Actuator/sensor cordset, double-ended, M12, 3-, 4-, 5- and 8-poles, male straight to female 90° connector with self-locking thread and molded TPE, PUR, or PVC cable, IEC color code.

RST-RKWT

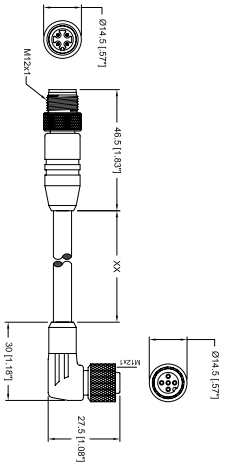

Pin Assignments

M12 - Male/Female

3 poles



1 = brown
3 = blue
4 = black

4 poles

1 = brown
2 = white
3 = blue
4 = black

5 poles (794)



1 = brown
2 = white
3 = blue
4 = black
5 = green/yellow

5 poles (all others)



1 = brown
2 = white
3 = blue
4 = black
5 = grey

8 poles



1 = white
2 = brown
3 = green
4 = yellow
5 = grey
6 = pink
7 = blue
8 = red

M12-Round-Plug Connector, Double-Ended Cordsets, According to IEC 61076-2-101

RST-RKT | RST-RKWT

Technical Data

Environmental

Degree of protection	IP 67 / NEMA 6P
Operating temperature range	PUR: -40°C (-40°F) / +80°C (176°F) PVC: -40°C (-40°F) / +90°C (194°F) TPE: -40°C (-40°F) / +90°C (194°F)

Mechanical

Housing / Molded body	PUR, yellow RST 8-RKT 8-627: PUR, black RST 8-RKWT 8-627: PUR, black
Insert	PUR, Yellow RST 8-RKT 8-627: PUR, orange RST 8-RKWT 8-627: PUR, orange
Contacts	CuSn, gold over nickel-plated
Coupling nut	CuZn, nickel-plated
O-ring (female only)	FKM or Viton

Electrical

Current rating	4 A
RST 8-RKT 8-XXX:	1.5A
Voltage rating	250 V 5-Pole: 60V 8-Pole: 30 V AC /36 V DC

Cable Specifications

Cable No.	Outer Jacket	Gauge	Jacket Color	OD
602	**PUR**	**18**AWG	Yellow	.230" (5.8 mm)
Continuous flex rating and suitable for general C-track usage. 1 million cycles at minimum bend radius 10X cable diameter.				
610	**PUR**	**22**AWG	Yellow	.190" (4.8 mm)
612	**PVC**	**22**AWG	Yellow	.210" (5.3 mm)
627	**PVC**	**24**AWG	Black	.232" (5.9 mm)
632	**PVC**	**22**AWG	Yellow	.190" (4.8 mm)
633	**PVC**	**22**AWG	Yellow	.190" (4.8 mm)
637	**TPE/PLTC**	**18**AWG	Yellow	.280" (7.1 mm)
643	**TPE/PLTC**	**22**AWG	Yellow	.246" (6.2 mm)
644	**PUR**	**22**AWG	Yellow	.210" (5.3 mm)
645	**PUR**	**18**AWG	Yellow	.220" (5.6 mm)
679	**PUR**	**22**AWG	Yellow	.190" (4.8 mm)
713	**TPE/PLTC**	**22**AWG	Yellow	.280" (7.1 mm)
727	**TPE/PLTC**	**22**AWG	Yellow	.335" (8.5 mm)
731	**TPE/PLTC**	**18**AWG	Yellow	.261" (6.6 mm)
794	**TPE/PLTC**	**18**AWG	Yellow	.304" (7.7 mm)

Part Number		Pins	Outer Jacket	Standard Cable Lengths	Characteristics
RST 3-RKT 4-3-731/...M	RST 3-RKWT 4-3-731/...M	**3**	TPE/PLTC	2 M / 5 M / 10 M	
RST 3-RKT 4-3-632/...M	RST 3-RKWT 4-3-632/...M		PVC	2 M / 5 M / 10 M	
RST 3-RKT 4-3-645/...M	RST 3-RKWT 4-3-645/...M		PUR	2 M / 5 M / 10 M	
RST 3-RKT 4-3-610/...M	RST 3-RKWT 4-3-610/...M		PUR	2 M / 5 M / 10 M	
RST 4-RKT 4-637/...M	RST 4-RKWT 4-637/...M	**4**	TPE/PLTC	1 M / 2 M / 3 M / 5 M / 6 M / 10 M	
RST 4-RKT 4-633/...M	RST 4-RKWT 4-633/...M		PVC	2 M / 5 M / 10 M	
RST 4-RKT 4-643/...M	RST 4-RKWT 4-643/...M		TPE/PLTC	1 M / 2 M / 5 M / 10 M	
RST 4-RKT 4-602/...M	RST 4-RKWT 4-602/...M		PUR	1 M / 2 M / 3 M / 4 M / 5 M / 6 M / 10 M	
RST 4-RKT 4-679/...M	RST 4-RKWT 4-679/...M		PUR	2 M / 5 M / 10 M	
RST 5-RKT 5-612/...M	RST 5-RKWT 5-612/...M	**5**	PVC	2 M / 5 M / 10 M	
RST 5-RKT 5-644/...M	RST 5-RKWT 5-644/...M		PUR	2 M / 5 M / 10 M	
RST 5-RKT 5-713/...M	RST 5-RKWT 5-713/...M		TPE/PLTC	2 M / 5 M / 10 M	
RST 5-RKT 5-794/...M	RST 5-RKWT 5-794/...M		TPE/PLTC	2 M / 5 M / 10 M	
RST 8-RKT 8-627/...M	RST 8-RKWT 8-627/...M	**8**	PVC	2 M / 5 M / 10 M	
RST 8-RKT 8-727/...M	RST 8-RKWT 8-727/...M		TPE/PLTC	2 M / 5 M / 10 M	

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.