

## LPQ250 Series

250 Watts

**Total Power:** 250 Watts  
**Input Voltage:** 85-264 Vac  
120 - 300 Vdc  
**# of Outputs:** Quad



Rev. 04.29.11\_157  
LPQ250 Series  
1 of 3



### Special Features

- Active power factor correction
- IEC EN61000-3-2 compliance
- Remote sense on main output
- Power fail and remote inhibit
- Single wire current sharing
- Built-in EMI filter
- Adjustable floating 4th output
- 2 Supervisory outputs 5 V and 12 V
- Overvoltage protection
- Overload protection
- Thermal overload protection
- DC power good
- 120 KHz switching frequency
- Cover -C
- Optional with fan cover -CF
- Optional end fan cover -CEF

### Safety

- **VDE** 0805/EN60950 (IEC950)  
11774-3336-1262
- **UL** UL1950 EI32002
- **CSA** CSA 22.2-234 Level 5  
LR53982C
- **NEMKO** EN 60950/EMKO-TUE  
P95102999 (74-sec) 203
- **CB** Certificate & report 2186
- **CE** Mark (LVD)

## Electrical Specifications

### Input

Input range:	85-264 Vac; 120 - 300 Vdc
Frequency:	47-440 Hz
Inrush current:	20 A max, cold start @ 25 °C
Efficiency:	75% typical at full load
EMI filter:	FCC Class B conducted and radiated CISPR 22 Class B conducted and radiated EN55022 Class B conducted and radiated VDE 0878 PT3 Class B conducted and radiated
Safety ground leakage current:	< 0.5 mA @ 50/60 Hz, 264 VAC input

### Output

Maximum power:	With cover: 250 W with 30 CFM forced air. (-C) (-CF) (CEF)
Adjustment range:	± 5% min. on main: 5-25 V on 4th output
Supervisory outputs:	5 V @ 100 mA regulated, 12 V @ 500 mA
Hold-up time:	16 ms @ 250 W load, 115 VAC nominal line
Overload protection:	Short circuit protection on all outputs. Case overload protected @ 110-145% above peak rating
Overvoltage protection:	5 V output: 5.7 to 6.7 VDC. Other models 10% to 25% above nominal output



### Logic Control

Power fail:	TTL Logic signal goes high 50-150 msec after 5 V output. It goes low at least 4 ms before loss of regulation
Remote on/off:	Requires an external contact (N.O or N.C) to inhibit outputs
DC-OK:	TTL logic goes high 50-150 msec after the output. It goes low when there is loss of regulation.
Remote sense:	Compensates for 0.5 V lead drop minimum, will operate without remote sense connected. Reverse connection protected

## Environmental Specifications

Operating temperature:	0° to 50 °C ambient; derate each output at 2.5% per degree from 50° to 70 °C
Storage temperature:	-40 °C to +85 °C
Temperature coefficient:	± 0.4% per °C
Electromagnetic susceptibility:	Designed to meet IEC 801, -2, -3, -4, -5, -6, Level 3
Humidity:	Operating; non-condensing 5% to 95%
Vibration:	Three orthogonal axes, sweep at 1 oct/min, 5 min. dwell at four major resonances 0.7 G peak 5 Hz to 500 Hz, operational
MTBF demonstrated:	> 550,000 hours at full load and 25 °C ambient conditions


### Ordering Information

Model Number	Output Voltage	Minimum Load	Maximum Load with 30CFM Forced Air	Peak Load <sup>1</sup>	Regulation <sup>2</sup>	Ripple P/P (PARD) <sup>3</sup>
LPQ252-C	+5 V	3 A	35 A	40 A	±2%	50 mV
	+12 V	0 A	10 A	12 A	±3%	120 mV
	-12 V	0 A	6 A	8 A	±3%	120 mV
	± 5 - 25 V	0 A	6 A	8 A	±3%	240 mV max.
LPQ253-C	+5 V	3 A	35 A	40 A	±2%	50 mV
	+15 V	0 A	10 A	12 A	±3%	150 mV
	-15 V	0 A	6 A	8 A	±3%	150 mV
	± 5 - 25 V	0 A	6 A	8 A	±3%	240 mV max.

1. Peak current lasting < 30 seconds with a maximum 10% duty cycle.
2. At 25 °C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 µF in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.
4. 4th output 5 - 25 V factory set at 5 V.
5. Minimum Load is required.
6. If optional CF or CEF fans are not used, 30CFM forced air cooling needs to be provided and is required through the length of the power supply. Not convection rated.

Note: -CF suffix added to the model number indicates cover with top fan. -CEF suffix added to the model number indicates cover with dual end mounted fan cover and AC inlet.

Mechanical Drawing

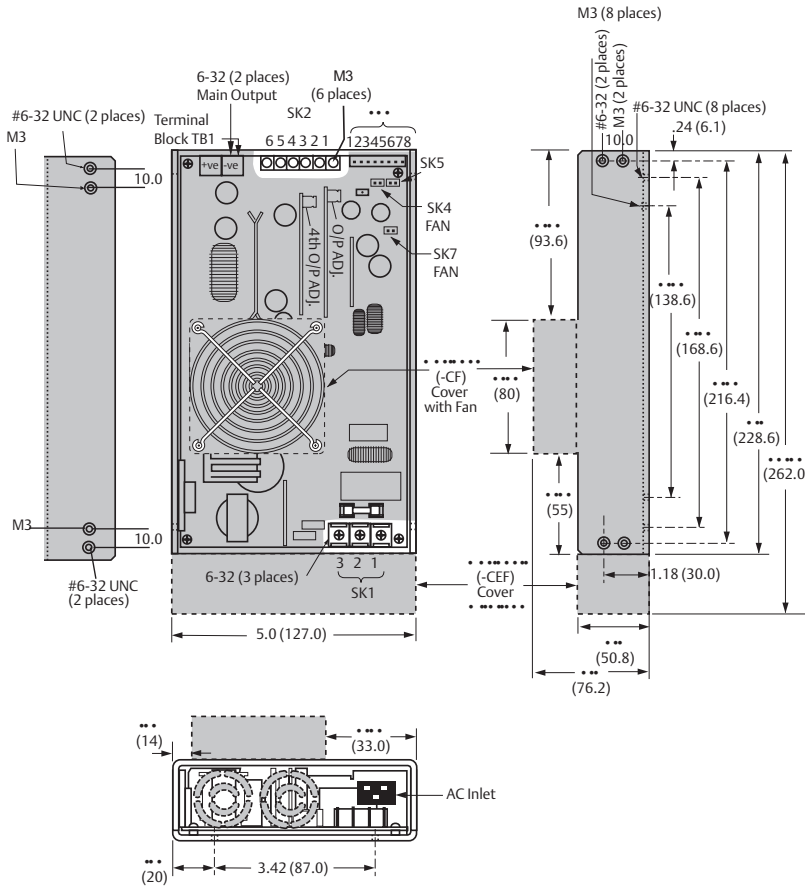

Pin Assignments

Connector	PIN	Assignment	
SK1	PIN 1	Neutral	
	PIN 2	Line	
	PIN 3	Ground	
	SK2	PIN 1	+ 12 / 15V
		PIN 2	Common
		PIN 3	Common
SK3	PIN 4	- 12 / 15V	
	PIN 5	5-25 V RET Float	
	PIN 6	5-25 V Float	
	SK4	PIN 1	+ Remote sense
		PIN 2	- Remote sense
		PIN 3	Remote inhibit (N.O.)
PIN 4		Remote inhibit (N.C.)	
PIN 5		Common	
PIN 6		Current sharing	
PIN 7		Power Fail	
PIN 8		DC Power Good	
SK4	PIN 1	+ Fan's power source (12 V @ 500 mA)	
	PIN 2	- Fan's power source (12 V @ 500 mA)	
SK5	PIN 1	+ Supervisory output supply (5 V @ 100 mA)	
	PIN 2	- Supervisory output supply (5 V @ 100 mA)	
SK7	PIN 1	+ Fan's power source (12 V @ 500 mA)	
	PIN 2	- Fan's power source (12 V @ 500 mA)	

Mating Connectors

SK3	Molex 22-01-1084 PINS: 08-70-0057
SK4	Molex 22-01-3027 PINS: 08-50-0114
SK5	Molex 22-01-3027 PINS: 08-50-0114
SK7	Molex 22-01-3027 PINS: 08-50-0114

Emerson Network Power Connector Kit #70-841-005, includes all of the above.

- Specifications subject to change without notice.
- All dimensions in inches (mm), tolerance is ± 0.02" (± 0.5mm)
- Specifications are at factory settings.
- To enable normally closed remote inhibit, cut jumper J1.
- Mounting maximum insertion depth is 0.12".
- Warranty: 2 years
- Weight: 3.1 lb / 1.41 kg

Americas

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
Telephone: +852 2176 3333  
Facsimile: +852 2176 3888

For global contact, visit:

[www.Emerson.com/EmbeddedPower](http://www.Emerson.com/EmbeddedPower)  
[techsupport.embeddedpower@emerson.com](mailto:techsupport.embeddedpower@emerson.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2011 Emerson Electric Co.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.