




Presentation of the range


The RXM Optimum miniature relay range comprises:

- 1 5 A relay with 2 C/O contacts or 3 A relays with 4 C/O contacts.
The relays have the same dimensions.
- 2 Socket with mixed contact terminals.
- 3 Metal maintaining clamps (accessories).

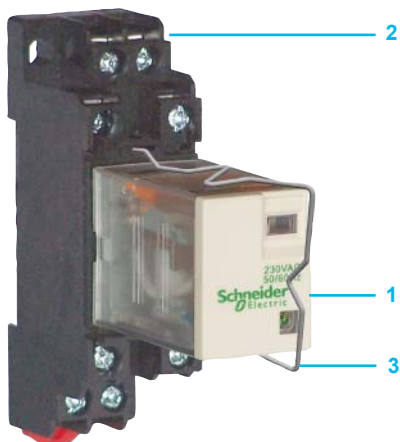

Relay description

- 1 Area by which the product can be easily gripped.
- 2 Mechanical "relay status" indicator.
- 3 LED (depending on version) indicating the relay status.
- 4 Four notches for rail mounting adapter or panel mounting adapter with fixing lugs.
- 5 Eight or fourteen Faston type pins.

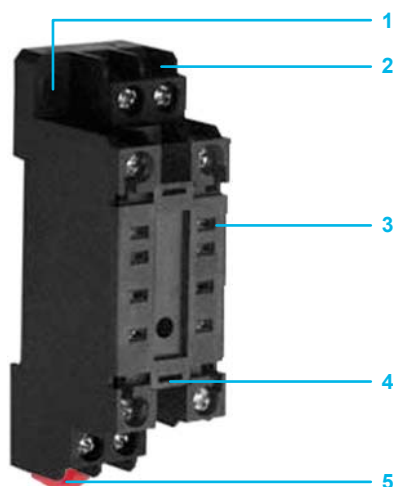

Socket description

- 1 Two fixing holes for panel mounting.
- 2 Connection by screw clamp terminals.
- 3 Eight or fourteen female contacts for the relay pins.
- 4 Two fixing holes for metal maintaining clamp.
- 5 Locating slot for mounting on DIN rail with fixing clip.

General characteristics

Conforming to standards		CE, ROHS, IEC/EN 61810-1 (iss.2)
Product certifications		None
Ambient air temperature around the device	Storage	°C - 40... + 85
	Operation	°C - 40... + 55
Vibration resistance conforming to IEC/EN60068-2-6	Operating	3 gn (10...50 Hz)
	Not operating	6 gn (10...50 Hz)
Degree of protection conforming to IEC/EN 60529		IP 40
Shock resistance conforming to IEC/EN 60068-2-27	Opening	10 gn
	Closing	5 gn
Protection category		RT I
Mounting position		Any

Insulation characteristics


Rated insulation voltage (Ui)	V	250 (IEC)
Rated impulse withstand voltage (Uimp)	kV	3.6 (1.2/50 μs)
Dielectric strength (rms voltage)	Between coil and contact	~ V 2000
	Between poles	~ V 2000
	Between contacts	~ V 1000

Contact characteristics


Relay type				RXM 2LB●●●	RXM 4LB●●●
Number and type of contacts				2 C/O	4 C/O
Contact materials				Silver Alloy	Silver Alloy
Conventional thermal current (Ith)		For ambient temperature ≤55 °C	A	5	3
Rated operational current in utilisation categories AC-1 and DC-1	Conforming to IEC	N/O		5	3
		N/C		2.5	1.5
Minimum switchable current			mA	10	
Switching voltage	Maximum		V	---/~ 250	
	Minimum		V	17	
Rated load (resistive)			A	5 / 250 VAC	3 / 250 VAC
			A	5 / 28 VDC	3 / 28 VDC
Switching capacity	Maximum	~	VA	1250	750
		---	W	140	84
	Minimum		mW	170	170
Maximum operating rate in operating cycles/hour	No-load			18 000	
	Under load			1200	
Utilisation coefficient				20 %	
Mechanical durability			In millions of operating cycles	10	
Electrical durability			Resistive load	0.1	
In millions of operating cycles			Inductive load	See curves below	

Electrical durability of contacts

For 2 poles relay




For 4 poles relay




A Inductive load
B Resistive load

Maximum switching capacity

For 2 poles relay



For 4 poles relay



A Inductive load ~
B Resistive load ~
C Inductive load ---
D Resistive load ---

Durability (inductive load) = durability (resistive load) x reduction coefficient.


Coil characteristics										
Average consumption		~	VA	1.2						
		---	W	0,9						
Drop-out voltage threshold		~		≥ 0.15 Uc						
		---		≥ 0.1 Uc						
Operating time (response time)	Between coil energisation and making of the On-delay contact	~	ms	20						
		---	ms	20						
	Between coil de-energisation and making of the Off-delay contact	~	ms	20						
		---	ms	20						
Control circuit voltage Uc			V	12	24	36	48	110	120	230
Relay control voltage codes				JD	BD	CD	ED	FD	—	—
DC supply	Average resistance at 20 °C ± 10%		Ω	160	630	1500	2600	11000	—	—
	Operating voltage limits	Min.	V	9.6	19.2	28.8	38.4	88	—	—
		Max.	V	13.2	26.4	39.6	52.8	121	—	—
Relay control voltage codes				—	B7	—	—	—	F7	P7
AC supply	Average resistance at 20 °C ± 15%		Ω	—	160	—	—	—	4500	15000
	Operating voltage limits	Min.	V	—	19.2	—	—	—	96	184
		Max.	V	—	26.4	—	—	—	132	253
Socket characteristics										
Socket Type				RXZ E1M2C				RXZ E1M4C		
Relay Type				RXM 2●●●●●				RXM 2●●●●●, RXM 4●●●●●		
Contact terminal arrangement				Mixed						
Wire connection method				Screw clamp						
Width			mm	22.5				29		
Product certifications				None						
Conformity to standards				CE, ROHS, IEC 61984						
Electrical Ratings										
Conventional Thermal Current (Ith)			A	7						
Nominal Voltage Rating			V	250 (IEC)						
Dielectric Strength										
Output to Adjacent Output Terminals			Vrms	2 500						
Output to Input Terminals			Vrms	2 500						
General Characteristics										
Temperature range		Operating	°C	- 40...+ 55						
		Storage	°C	- 55...+ 85						
Degree of protection	Conforming to IEC/EN 60529			IP 20						
Connection	Solid cable without cable end	1 conductor	mm²	0.5...1.5						
			AWG	20...16						
		2 conductors	mm²	0.5...1.5						
			AWG	20...16						
	Flexible cable with cable end	1 conductor	mm²	0.25...1						
			AWG	22...17						
		2 conductors	mm²	0.25...1						
			AWG	22...17						
Screw Size			mm	M3						
Maximum tightening torque			Nm	0.8 (M3 Screw)						
Mounting				35 mm DIN Rail / Panel						
DIN Rail locking method				Red Plastic Clip						
Terminal Marking				IEC, NEMA						
Relay fixing plastic clip compatible				No				No		
Relay fixing metal clip compatible				Yes				Yes		
Protection modules				No				No		
Clip-In legend				No				No		




RXM 2LB2JD



RXZ E1M4C



RXZ 420



RXZ 430

References

Miniature relays without lockable test-button, with LED (sold in lots of 10)

Control circuit voltage	Number and type of contacts - Thermal current (Ith)			
	2 C/O - 5 A		4 C/O - 3 A	
	Unit reference	Weight	Unit reference	Weight
V		kg		kg
~ 12	RXM 2LB2JD	0.033	RXM 4LB2JD	0.035
~ 24	RXM 2LB2BD	0.032	RXM 4LB2BD	0.034
~ 36	RXM 2LB2CD	0.034	RXM 4LB2CD	0.036
~ 48	RXM 2LB2ED	0.033	RXM 4LB2ED	0.035
~ 110	RXM 2LB2FD	0.031	RXM 4LB2FD	0.033
~ 24	RXM 2LB2B7	0.033	RXM 4LB2B7	0.035
~ 120	RXM 2LB2F7	0.032	RXM 4LB2F7	0.033
~ 230	RXM 2LB2P7	0.031	RXM 4LB2P7	0.032

Miniature relays without lockable test-button, without LED (sold in lots of 10)

Control circuit voltage	Number and type of contacts - Thermal current (Ith)			
	2 C/O - 5 A		4 C/O - 3 A	
	Unit reference	Weight	Unit reference	Weight
V		kg		kg
~ 12	RXM 2LB1JD	0.032	RXM 4LB1JD	0.034
~ 24	RXM 2LB1BD	0.032	RXM 4LB1BD	0.033
~ 48	RXM 2LB1ED	0.033	RXM 4LB1ED	0.034
~ 24	RXM 2LB1B7	0.033	RXM 4LB1B7	0.034
~ 120	RXM 2LB1F7	0.031	RXM 4LB1F7	0.033
~ 230	RXM 2LB1P7	0.030	RXM 4LB1P7	0.032

Sockets

(sold in lots of 10)

Contact terminal arrangement	Connection	Relay type	Unit reference	Weight kg
Mixed	Screw clamp	RXM2	RXZ E1M2C	0.034
	Screw clamp	RXM2 RXM4	RXZ E1M4C	0.053

Accessories


(sold in lots of 10)

Description	For use with	Unit reference	Weight kg
Metal maintaining clamp	RXZ E1M2C	RXZ 420	0.001
	RXZ E1M4C	RXZ 430	0.001


nota: If protection module needed, please used the RZE2 sockets with the associated protection module RXM0. You can find all the details in the RXM0AB range.

RXM 4●●●●

Pin side view





RXZ E1M4C

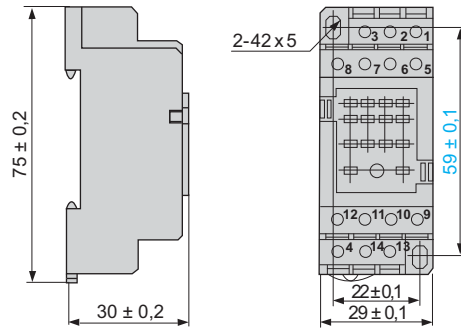



Schemes

Miniature relays

RXM 2●●●●●



RXM 4●●●●●



Symbols shown in blue correspond to Nema marking.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.