

# MPB125 Single-Output AC-DC Series



The MPB125 Series incorporates patented high efficiency circuitry, high power density and active Power Factor Correction (PFC) to meet the requirements of networking and data communications systems, as well as commercial and industrial configurations.

MPB125 single-output models deliver a fully-regulated output. The MPB125 is rated for convection as well as forced air cooling. Full output power is available with as few as 5 Cubic Feet per Minute (CFM) forced-air cooling.

The MPB125 product line is approved to the latest international regulatory standards and displays the CE Mark.

## Key Features & Benefits

- RoHS Compliant
- High Power Density
- Industry-Standard 3" x 5" Footprint
- Power Factor Correction (PFC) meets EN61000-3-2
- CE Marked to Low Voltage Directive (Pending)
- Input Transient & ESD Compliance to EN61000-4-2/-3/-4/-5
- MTBF In Excess of 1 Million Hours
- Output Adjustment Potentiometer

### North America

+1-866.513.2839

### Asia-Pacific

+86.755.29885888

### Europe, Middle East

+353 61 225 977

tech.support@psbel.com  
[belpowersolutions.com](http://belpowersolutions.com)

# MPB125 Single-Output AC-DC Series

## Single Output Model Selection

| MODEL                       | OUTPUT VOLTAGE [V] | MAXIMUM OUTPUT CURRENT (AMPS), 130 LFM | TOTAL REGULATION [%] | RIPPLE & NOISE <sup>1</sup> % pk-pk | ADJUSTMENT RANGE |
|-----------------------------|--------------------|----------------------------------------|----------------------|-------------------------------------|------------------|
| MPB125-1012G <sup>2,3</sup> | 12V                | 10.5A                                  | ±1%                  | 1%                                  | 11.76 to 12.24V  |

### NOTES:

- <sup>1</sup> Maximum peak-to-peak noise expressed as a percentage of output voltage, 20 MHz bandwidth.
- <sup>2</sup> Maximum forced-air output power is 125 watts with 5 CFM airflow.
- <sup>3</sup> Maximum convection output power is 70 watts.

## Input Specifications

| PARAMETER              | CONDITIONS/DESCRIPTION                                                      | MIN                | NOM | MAX      | UNITS            |
|------------------------|-----------------------------------------------------------------------------|--------------------|-----|----------|------------------|
| Input Voltage- AC      | Continuous input range                                                      | 90                 |     | 264      | VAC              |
| Input Frequency        | AC Input                                                                    | 47                 |     | 63       | Hz               |
| Brownout Protection    | Lowest AC input voltage that regulation is maintained with full rated loads | 90                 |     |          | VAC              |
| Hold-up Time           | Over full AC input voltage range at full rated load                         | 17                 |     |          | ms               |
| Input Current          | 90 VAC at full rated load                                                   |                    |     | 1.8      | A <sub>RMS</sub> |
| Input Protection       | Non-user serviceable internally located AC input line fuse, 3.15A           |                    |     |          |                  |
| Inrush Surge Current   | Internally limited by thermistor, one cycle, 25°C                           | 110VAC:<br>220VAC: |     | 23<br>46 | A <sub>PK</sub>  |
| Power Factor Circuitry | Active PFC meets requirements of EN61000-3-2                                |                    |     |          |                  |
| Operating Frequency    | Switching frequency of main transformer                                     |                    | 45  |          | kHz              |

## Output Specifications

| PARAMETER             | CONDITIONS/DESCRIPTION                                                                                                                                   | MIN | NOM                       | MAX       | UNITS |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----|---------------------------|-----------|-------|
| Efficiency            | Full Load, 230VAC                                                                                                                                        |     | 80                        |           | %     |
| Minimum Loads         | No Minimum Load is Required                                                                                                                              |     |                           |           | Amps  |
| Ripple and Noise      | Full load, 20 MHz bandwidth                                                                                                                              |     | See Model Selection Chart |           |       |
| Output Power (Note 1) | At 5 CFM forced-air cooling. See Application Note #M3 for details<br>Convection:                                                                         |     |                           | 125<br>70 | Watts |
| Overshoot /Undershoot | Output voltage overshoot/undershoot at turn-on.                                                                                                          |     |                           | 10        | %     |
| Regulation            | Varies by output. Total regulation includes: line changes from 85-132 VAC or 170-264 VAC, changes in load starting at 20% load and changing to 100% load |     | See Model Selection Chart |           |       |
| Transient Response    | Maximum deviation due to a 25% load change with unit at 75% load                                                                                         |     | 3                         |           | %     |
| Turn-on Delay         | Time required for initial output voltage stabilization                                                                                                   | 0.2 |                           | 1.5       | Sec   |
| Turn-on Rise Time     | Time required for output voltage to rise from 10% to 90%                                                                                                 | 0.2 |                           | 20        | ms    |

# MPB125 Single-Output AC-DC Series

## Interface Signals and Internal Protection

| PARAMETER              | CONDITIONS/DESCRIPTION                                                                                            | MIN  | NOM | MAX  | UNITS |
|------------------------|-------------------------------------------------------------------------------------------------------------------|------|-----|------|-------|
| Overvoltage Protection | MPB125-1012G                                                                                                      | 13.5 |     | 16.5 | VDC   |
| Overload Protection    | Fully protected against output short circuit or overload<br>Automatic recovery upon removal of overload condition |      |     |      |       |
| Thermal Shutdown       | Protected against overtemperature conditions<br>Unit recovers when overtemperature condition is removed           |      |     |      |       |

## Safety, Regulatory, and EMI Specifications


| PARAMETER                    | CONDITIONS/DESCRIPTION                                                                          | MIN  | NOM | MAX | UNITS |
|------------------------------|-------------------------------------------------------------------------------------------------|------|-----|-----|-------|
| Agency Approvals             | Approved to latest edition of the following standards: UL/CSA60950-1, IEC60950-1 and EN60950-1. |      |     |     |       |
| Dielectric Withstand Voltage | Input to Chassis                                                                                | 2121 |     |     | VDC   |
|                              | Input to Output (Tested by manufacturer only)                                                   | 4242 |     |     | VDC   |
| Electromagnetic Interference | EN55022 Conducted                                                                               | B    |     |     | Class |
| ESD Susceptibility           | Per EN61000-4-2, Level 4                                                                        | 8    |     |     | kV    |
| Flicker                      | Per EN61000-3-3                                                                                 |      |     |     |       |
| Radiated Susceptibility      | Per EN61000-4-3                                                                                 |      | 3   |     | V/m   |
| EFT/Burst                    | Per EN61000-4-4                                                                                 | 1    |     |     | kV    |
| Input Transient Protection   | Per EN61000-4-5, Level 3,<br>2 kV (Line-to-Ground) minimum,<br>1 kV (Line-to-Line) minimum.     |      |     |     |       |
| RF Immunity                  | Per EN61000-4-6. 0.15 to 80 MHz (1 kHz sine wave)                                               |      | 3   |     | V/m   |
| Magnetic Fields              | Per EN61000-4-8                                                                                 |      | 1   |     | A/m   |
| Voltage Dips                 | Per EN61000-4-11                                                                                |      |     |     |       |
| Insulation Resistance        | Input to output                                                                                 |      | 10  |     | MΩ    |
| Leakage Current              | Per EN60950 (264 VAC)                                                                           |      |     | 1.0 | mA    |

## Environmental Specifications

| PARAMETER               | CONDITIONS/DESCRIPTION                                                                                                                                                                                                                                 | MIN       | NOM | MAX | UNITS            |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----|-----|------------------|
| Altitude                | Operating                                                                                                                                                                                                                                              |           |     | 10K | ASL Feet         |
|                         | Non-Operating                                                                                                                                                                                                                                          |           |     | 50K |                  |
| Operating Temperature   | Derate linearly from 50 to 70°C to 50% power at 70°C                                                                                                                                                                                                   | At 100% I | 0   | 50  | °C               |
| Storage Temperature     |                                                                                                                                                                                                                                                        | -40       |     | 85  | °C               |
| Forced-Air Cooling      | Forced-air cooling of 5 CFM is required for full output power.<br>Air velocity is measured with power supply mounted on 0.375" (9.5mm) standoffs. Airflow direction is from the input section to the output section. See Application Note for details. |           |     |     |                  |
| Temperature Coefficient | Included in total regulation of outputs                                                                                                                                                                                                                |           |     |     |                  |
| Relative Humidity       | Non-Condensing                                                                                                                                                                                                                                         | 5         |     | 95  | %RH              |
| Shock                   | Operating: 11 ±3ms, 3 axes, Half Sine                                                                                                                                                                                                                  |           |     | 15  | Gpk              |
|                         | Non-operating: 11 ±3ms, 3 axes, Half Sine                                                                                                                                                                                                              |           |     | 40  |                  |
| Vibration               | Operating: Random vibration, 5-500 Hz, 10 minutes each axis                                                                                                                                                                                            |           |     | 2.4 | G <sub>RMS</sub> |
|                         | Non-Operating: Random vibration, 5-500 Hz, 10 minutes each axis                                                                                                                                                                                        |           |     | 6.0 |                  |

# MPB125 Single-Output AC-DC Series

Figure 1 - Mechanical Drawing (MPB125-1012G Model)

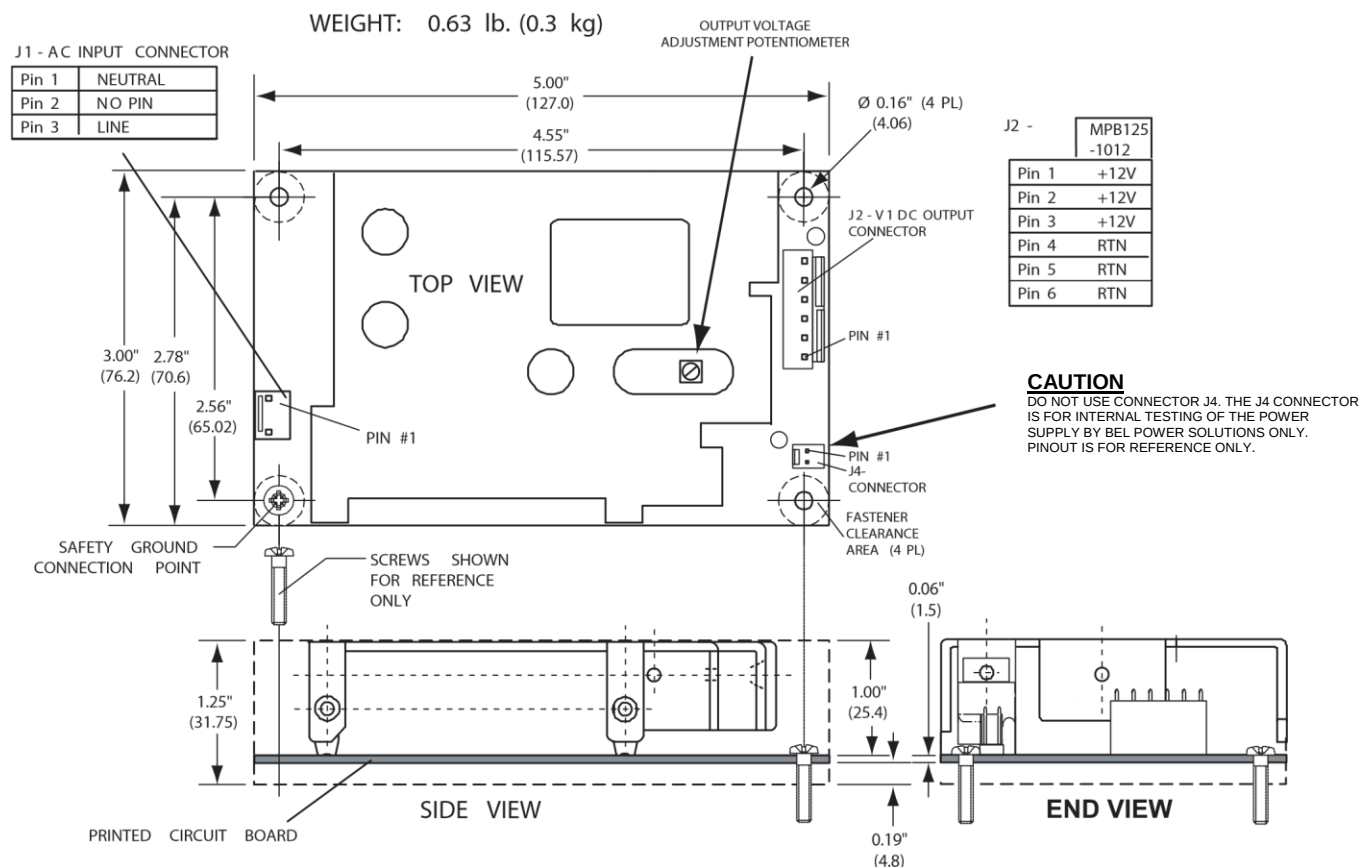

## Mating Connectors

| MPB125-1012G |         |            |
|--------------|---------|------------|
| J1           | Housing | 09-50-8033 |
|              | Pins    | 08-52-0113 |
| J2           | Housing | 09-50-8063 |
|              | Pins    | 08-52-0113 |

**NOTE:** Part numbers are MOLEX; equivalents are acceptable.

**For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)**

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.