

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.

© COPYRIGHT

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC DW	DIST —	REVISIONS							
		P	LTR	DESCRIPTION			DATE	DWN	APVD
			G	REVISED PER ECR-16-003830			14MAR16	FL	SY

8.7	GEN II & GEN III		2.30	71.35	70	73.15	89	71.65	164	BLACK	30u"	4-1734774-8
5.45				38.35	37	40.15	56	38.65	98	WHITE		4-1734774-7
3.85				21.35	20	23.15	39	21.65	64	BLACK		4-1734774-6
2.55				7.35	6	9.15	25	7.65	36	WHITE		4-1734774-5
8.7				71.35	70	73.15	89	71.65	164	BLACK		4-1734774-4
5.45				38.35	37	40.15	56	38.65	98	WHITE		4-1734774-3
3.85				21.35	20	23.15	39	21.65	64	BLACK		4-1734774-2
2.55				7.35	6	9.15	25	7.65	36	WHITE		4-1734774-1
8.7				71.35	70	73.15	89	71.65	164	BLACK	15u"	4-1734774-0
5.45				38.35	37	40.15	56	38.65	98	WHITE	G/F	3-1734774-9
3.85				21.35	20	23.15	39	21.65	64	BLACK	15u"	3-1734774-8
2.55				7.35	6	9.15	25	7.65	36	WHITE	G/F	3-1734774-7
8.7				38.35	37	40.15	56	38.65	98	BLACK	15u"	3-1734774-6
5.45				21.35	20	23.15	39	21.65	64	WHITE	G/F	3-1734774-5
3.85				7.35	6	9.15	25	7.65	36	BLACK	15u"	3-1734774-4
2.55				71.35	70	73.15	89	71.65	164	WHITE	G/F	3-1734774-3
8.7				38.35	37	40.15	56	38.65	98	BLACK	15u"	3-1734774-2
5.45				21.35	20	23.15	39	21.65	64	WHITE	G/F	3-1734774-1
3.85				7.35	6	9.15	25	7.65	36	BLACK	15u"	3-1734774-0
2.55				71.35	70	73.15	89	71.65	164	WHITE	G/F	3-1734774-9
8.7				38.35	37	40.15	56	38.65	98	BLACK	15u"	2-1734774-8
5.45				21.35	20	23.15	39	21.65	64	WHITE	G/F	2-1734774-7
3.85				7.35	6	9.15	25	7.65	36	BLACK	15u"	2-1734774-6
2.55				71.35	70	73.15	89	71.65	164	WHITE	G/F	2-1734774-5
8.7				38.35	37	40.15	56	38.65	98	BLACK	30u"	2-1734774-4
5.45				21.35	20	23.15	39	21.65	64	WHITE		2-1734774-3
3.85				7.35	6	9.15	25	7.65	36	BLACK		2-1734774-2
2.55				71.35	70	73.15	89	71.65	164	WHITE		2-1734774-1
8.7				38.35	37	40.15	56	38.65	98	BLACK		2-1734774-0
5.45				21.35	20	23.15	39	21.65	64	WHITE		1-1734774-9
3.85				7.35	6	9.15	25	7.65	36	BLACK	30u"	1-1734774-8
2.55				71.35	70	73.15	89	71.65	164	WHITE		1-1734774-7
8.7				38.35	37	40.15	56	38.65	98	BLACK	15u"	1-1734774-6
5.45				21.35	20	23.15	39	21.65	64	WHITE	G/F	1-1734774-5
3.85				7.35	6	9.15	25	7.65	36	BLACK	15u"	1-1734774-4
2.55				71.35	70	73.15	89	71.65	164	WHITE	G/F	1-1734774-3
8.7				38.35	37	40.15	56	38.65	98	BLACK	15u"	1-1734774-2
5.45				21.35	20	23.15	39	21.65	64	WHITE	G/F	1-1734774-1
3.85				7.35	6	9.15	25	7.65	36	BLACK	15u"	1-1734774-0
2.55				71.35	70	73.15	89	71.65	164	WHITE	G/F	1-1734774-9
8.7				38.35	37	40.15	56	38.65	98	BLACK	15u"	1734774-8
5.45				21.35	20	23.15	39	21.65	64	WHITE	G/F	1734774-7
3.85				7.35	6	9.15	25	7.65	36	BLACK	15u"	1734774-6
2.55				71.35	70	73.15	89	71.65	164	WHITE	G/F	1734774-5
8.7				38.35	37	40.15	56	38.65	98	BLACK	15u"	1734774-4
5.45				21.35	20	23.15	39	21.65	64	WHITE	G/F	1734774-3
3.85				7.35	6	9.15	25	7.65	36	BLACK	15u"	1734774-2
2.55				71.35	70	73.15	89	71.65	164	WHITE	G/F	1734774-1
WEIGHT(g)	PCI-E COMPLIANCE	HOUSING MATERIAL	DIM. L	DIM. E	DIM. D	DIM. C	DIM. B	DIM. A	POS.	HOUSING COLOR	MIN. GOLD THICKNESS	PART NUMBER

8.8	GEN II	PA46	2.30	71.35	70	73.15	89	71.65	164	BLACK	30u"	9-1734774-7
5.5				38.35	37	40.15	56	38.65	98	WHITE		9-1734774-6
3.9				21.35	20	23.15	39	21.65	64	BLACK		9-1734774-5
2.55				7.35	6	9.15	25	7.65	36	WHITE		9-1734774-4
8.8				71.35	70	73.15	89	71.65	164	BLACK		9-1734774-3
5.5				38.35	37	40.15	56	38.65	98	WHITE		9-1734774-2
3.9				21.35	20	23.15	39	21.65	64	BLACK		9-1734774-1
2.55				7.35	6	9.15	25	7.65	36	WHITE		9-1734774-0
8.8				71.35	70	73.15	89	71.65	164	BLACK	15u"	8-1734774-9
5.5				38.35	37	40.15	56	38.65	98	WHITE	G/F	8-1734774-8
3.9				21.35	20	23.15	39	21.65	64	BLACK	15u"	8-1734774-7
2.55				7.35	6	9.15	25	7.65	36	WHITE	G/F	8-1734774-6
8.8				71.35	70	73.15	89	71.65	164	BLACK	15u"	8-1734774-5
5.5				38.35	37	40.15	56	38.65	98	WHITE	G/F	8-1734774-4
3.9				21.35	20	23.15	39	21.65	64	BLACK	15u"	8-1734774-3
2.55				7.35	6	9.15	25	7.65	36	WHITE	G/F	8-1734774-2
8.8				71.35	70	73.15	89	71.65	164	BLACK	15u"	8-1734774-1
5.5				38.35	37	40.15	56	38.65	98	WHITE	G/F	8-1734774-0
3.9				21.35	20	23.15	39	21.65	64	BLACK	15u"	7-1734774-9
2.55				7.35	6	9.15	25	7.65	36	WHITE	G/F	7-1734774-8
8.8				71.35	70	73.15	89	71.65	164	BLACK	15u"	7-1734774-7
5.5				38.35	37	40.15	56	38.65	98	WHITE	G/F	7-1734774-6
3.9				21.35	20	23.15	39	21.65	64	BLACK	15u"	7-1734774-5
2.55				7.35	6	9.15	25	7.65	36	WHITE	G/F	7-1734774-4
8.8			3.10	71.35	70	73.15	89	71.65	164	BLACK	30u"	7-1734774-3
5.5				38.35	37	40.15	56	38.65	98	WHITE		7-1734774-2
3.9				21.35	20	23.15	39	21.65	64	BLACK		7-1734774-1
2.55				7.35	6	9.15	25	7.65	36	WHITE		7-1734774-0
8.8				71.35	70	73.15	89	71.65	164	BLACK		6-1734774-9
5.5				38.35	37	40.15	56	38.65	98	WHITE		6-1734774-8
3.9				21.35	20	23.15	39	21.65	64	BLACK	30u"	6-1734774-7
2.55				7.35	6	9.15	25	7.65	36	WHITE		6-1734774-6
8.8				71.35	70	73.15	89	71.65	164	BLACK	15u"	6-1734774-5
5.5				38.35	37	40.15	56	38.65	98	WHITE	G/F	6-1734774-4
3.9				21.35	20	23.15	39	21.65	64	BLACK	15u"	6-1734774-3
2.55				7.35	6	9.15	25	7.65	36	WHITE	G/F	6-1734774-2
8.8				71.35	70	73.15	89	71.65	164	BLACK	15u"	6-1734774-1
5.5				38.35	37	40.15	56	38.65	98	WHITE	G/F	6-1734774-0
3.9				21.35	20	23.15	39	21.65	64	BLACK	15u"	5-1734774-9
2.55				7.35	6	9.15	25	7.65	36	WHITE	G/F	5-1734774-8
8.8				71.35	70	73.15	89	71.65	164	BLACK	15u"	5-1734774-7
5.5				38.35	37	40.15	56	38.65	98	WHITE	G/F	5-1734774-6
3.9				21.35	20	23.15	39	21.65	64	BLACK	15u"	5-1734774-5
2.55				7.35	6	9.15	25	7.65	36	WHITE	G/F	5-1734774-4
8.8				71.35	70	73.15	89	71.65	164	BLACK	15u"	5-1734774-3
5.5				38.35	37	40.15	56	38.65	98	WHITE	G/F	5-1734774-2
3.9				21.35	20	23.15	39	21.65	64	BLACK	15u"	5-1734774-1
2.55				7.35	6	9.15	25	7.65	36	WHITE	G/F	5-1734774-0
WEIGHT(g)	PCI-E COMPLIANCE	HOUSING MATERIAL	DIM. L	DIM. E	DIM. D	DIM. C	DIM. B	DIM. A	POS.	HOUSING COLOR	MIN. GOLD THICKNESS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.3
2 PLC ± 0.2
3 PLC ± 0.15
4 PLC ± -
ANGLES ± 3°
FINISH

DWN
B. HSING
15JUL2009

CHK
S. CHIEN
15JUL2009

APVD
W. KODAMA
15JUL2009

PRODUCT SPEC
108-57871

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1

NOTES:

1. MATERIAL:

1.1 HOUSING: 1.PA46 WITH 40% G.F, UL94 V-0, COLOR: SEE TABLE.

2.PA9T WITH 30% GF, UL94 V-0, COLOR: SEE TABLE.

1.2 CONTACT: PHOSPHOR BRONZE

2. FINISH:

CONTACT: (SEE TABLE) GOLD PLATING ON CONTACT AREA.

2.54um [100u"] MIN. MATTE-TIN PALTING ON SOLDER TAIL AREA.

1.27um [50u"] MIN. NICKEL UNDERPLATING OVERALL.

3. CONNECTOR HAS MET THE REQUIREMENTS

PER PCI EXPRESS GEN 2 TECHNICAL DOCUMENT.

4. WEIGHT:

36 POS.: 2.55 GRAMS; 64 POS.: 3.90 GRAMS


98 POS.: 5.50 GRAMS; 164 POS.: 8.80 GRAMS

5. WAVE SOLDER CAPABLE TO 265°C PER TEST SPEC. 109-202 CONDITION B.

6. REFLOW SOLDER CAPABLE TO 260°C PER TEST SPEC. 109-201 CONDITION B.
(REFLOW SOLDERING PLEASE USE PN : 1734774-1 TO 4-1734774-8)


D

D

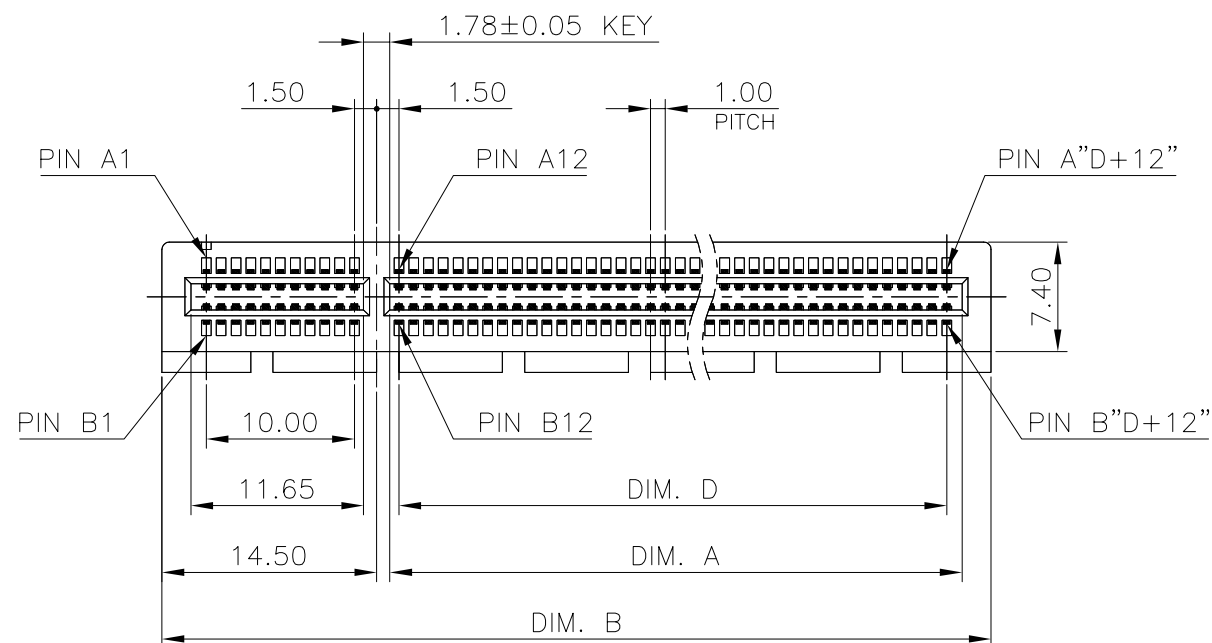



C

C

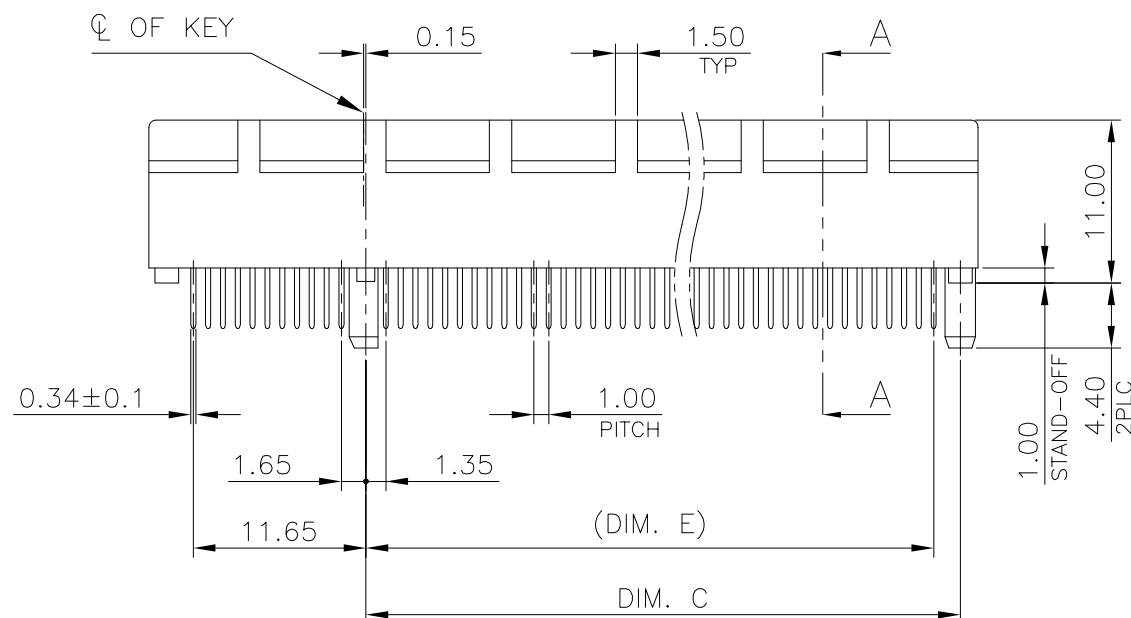


B

B

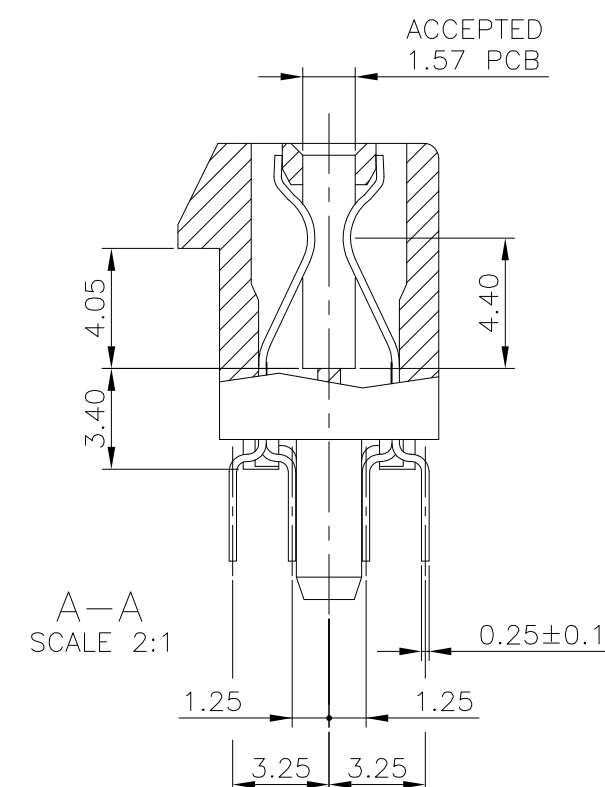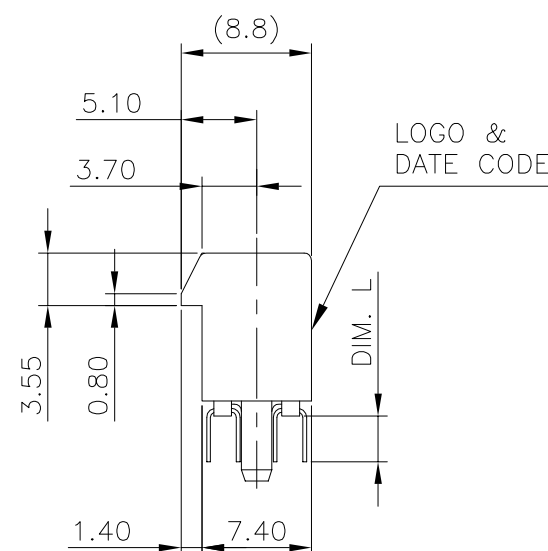

A

A

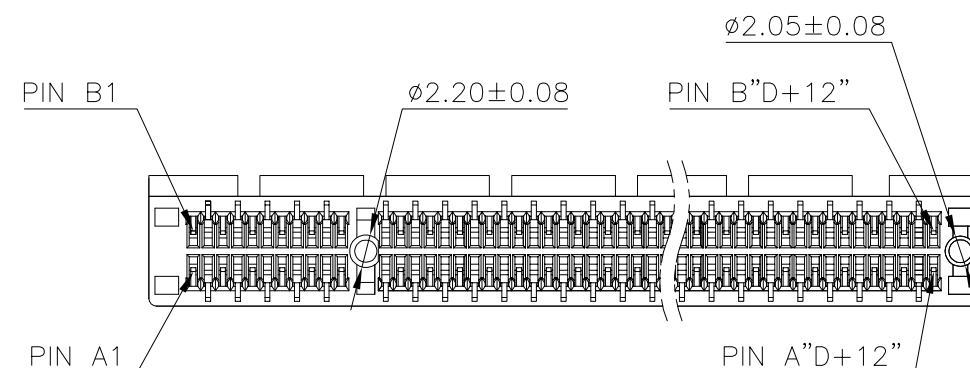

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD


PRODUCT SPEC

APPLICATION SPEC

WEIGHT

SEE NOTE 4

CUSTOMER DRAWING

DIMENSIONS:
MMTOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± 0.3
2 PLC ± 0.2
3 PLC ± 0.15
4 PLC ± -
ANGLES ± 3°

MATERIAL

SEE NOTE

FINISH

SEE NOTE



TE Connectivity

NAME

PCI EXPRESS CARD EDGE CONNECTOR
VERTICAL, DIP TYPE, 3GIO

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO


A300779C-1734774

SCALE

SHEET

2 OF 5

REV G

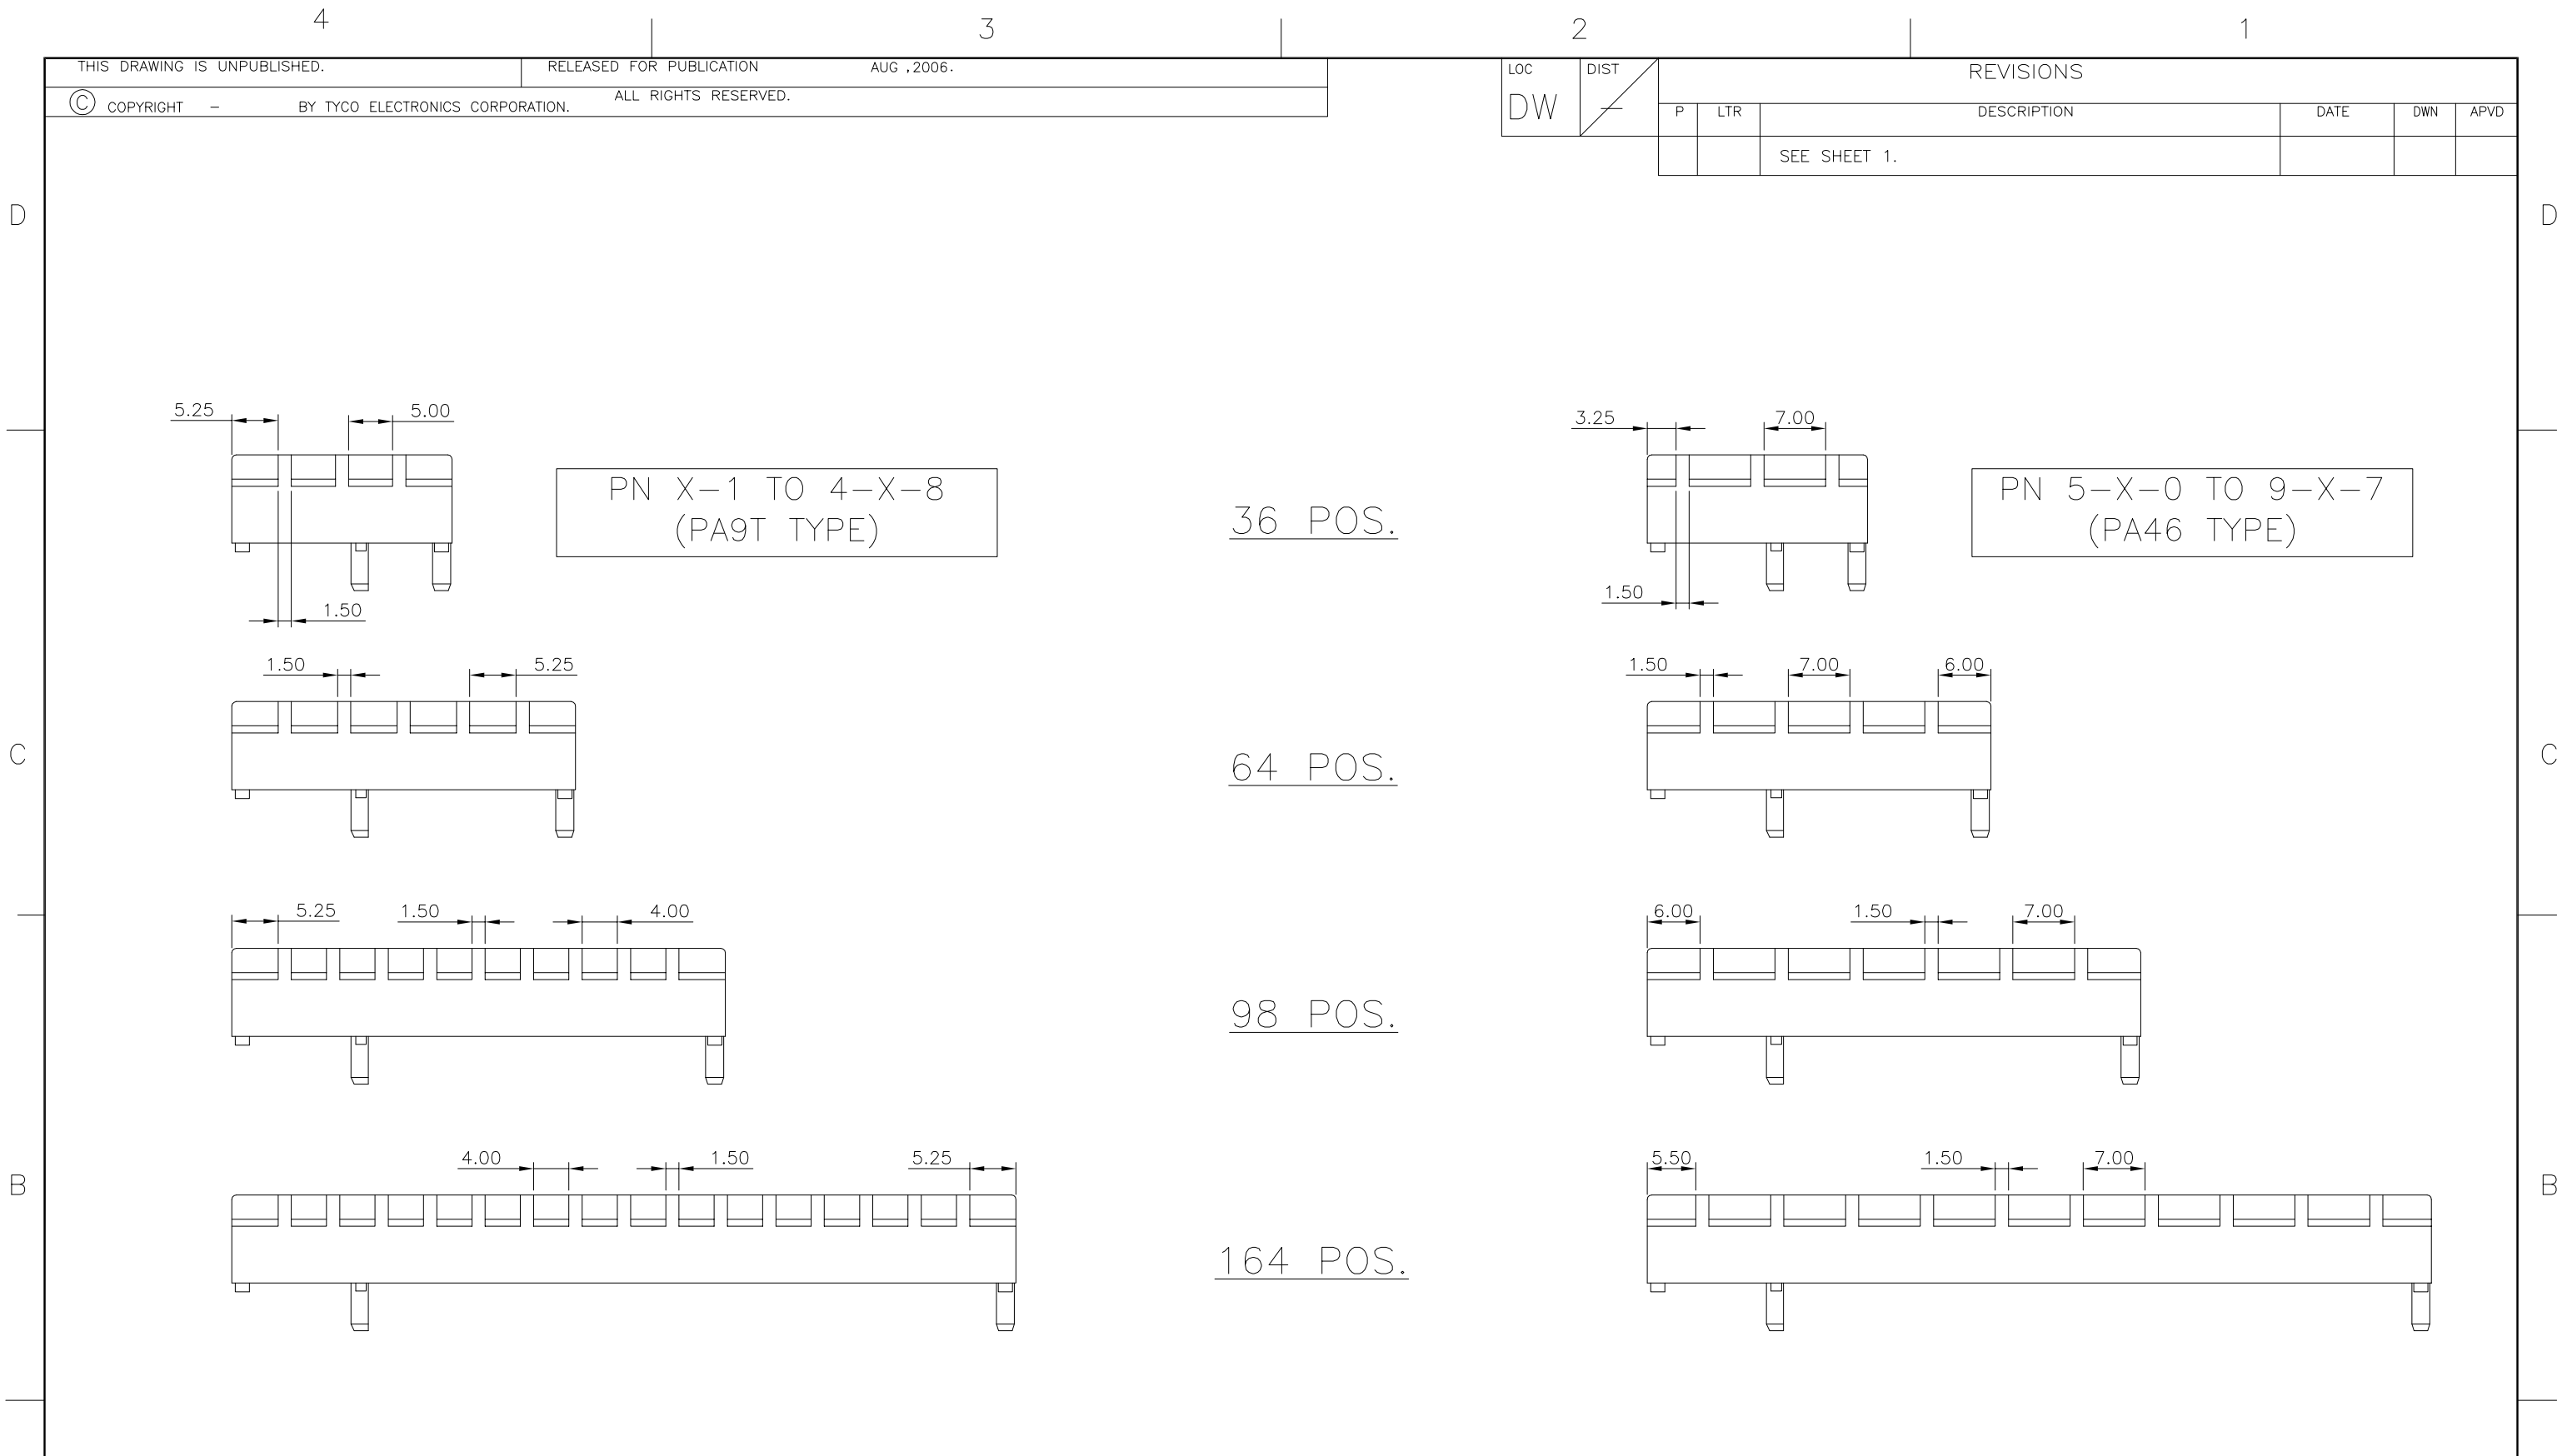

4

3

2

1


LOC	DIST	REVISIONS				
DW		P	LTR	DESCRIPTION	DATE	APVD
				SEE SHEET 1.		

D

D


ADD-IN CARD EDGE-FINGER DIMENSIONS

NOTES:
CHAMFER EDGE MUST BE FREE OF CUTTING BURRS

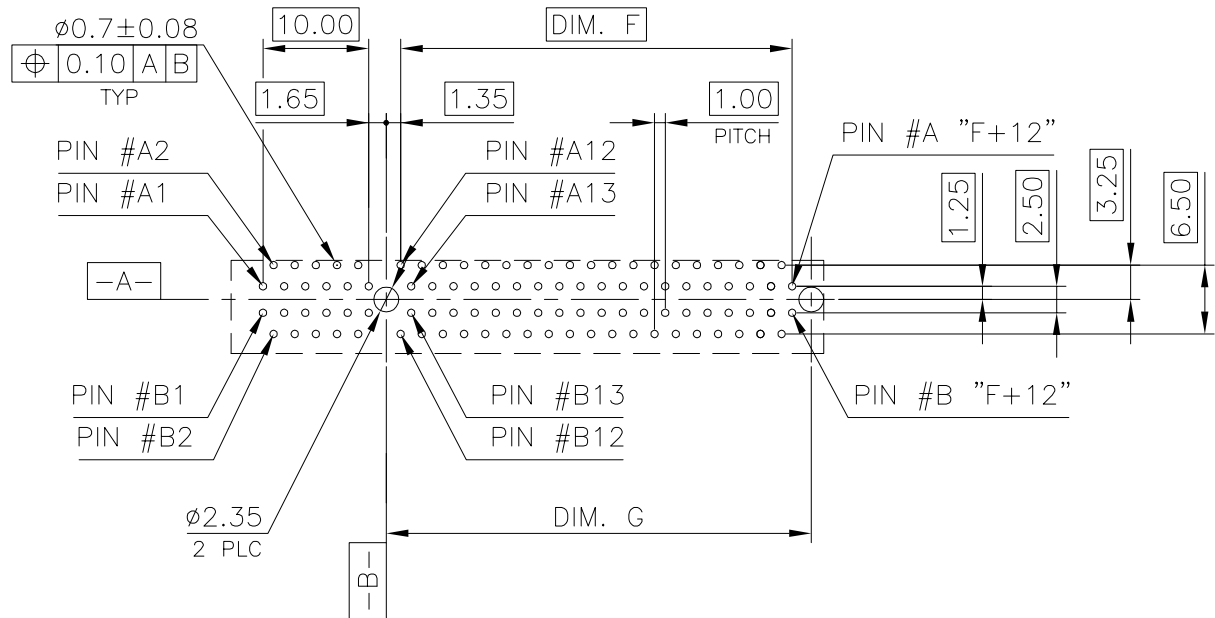


RECOMMENDED PCB LAYOUT

TOLERANCE: ±0.05
FOR DIM.L=3.1mm PCB THICKNESS: 2.4mm
FOR DIM.L=2.3mm PCB THICKNESS: 1.6mm

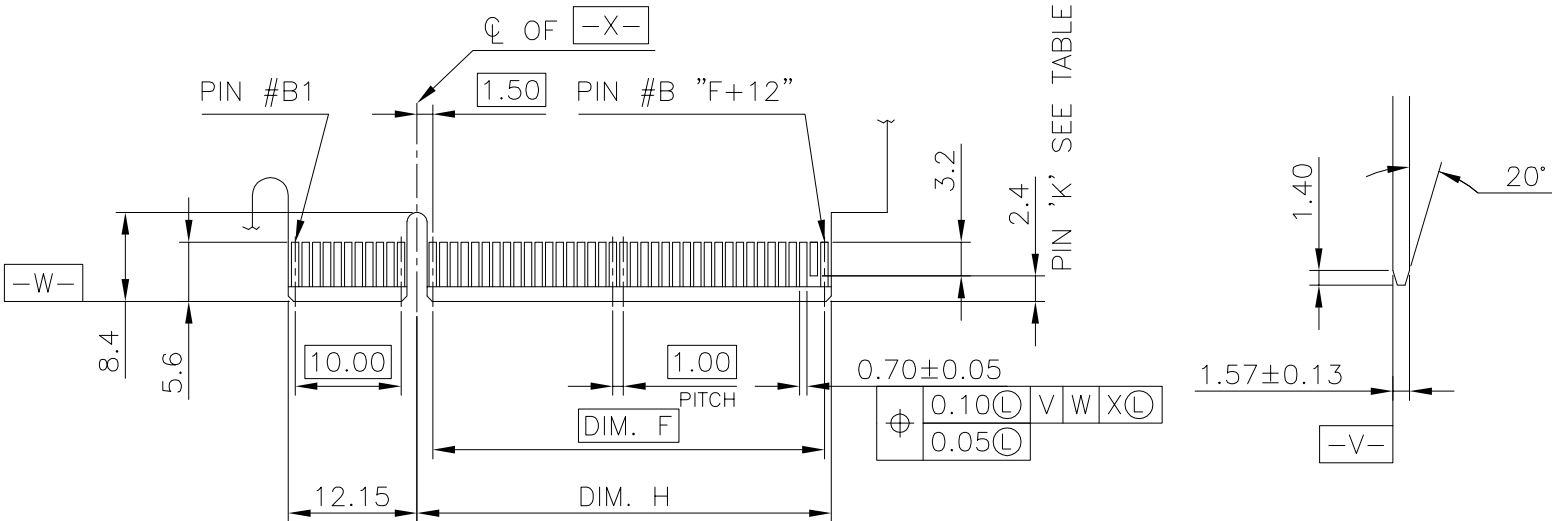

I/O PANEL DIRECTION
PRIMARY (COMPONENT) SIDE

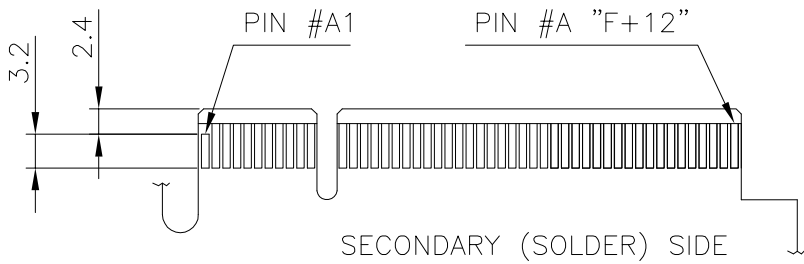

SECONDARY (SOLDER) SIDE

164	70.0	73.15	72.15	A1, B17, B31, B48, B81
98	37.0	40.15	39.15	A1, B17, B31, B48
64	20.0	23.15	22.15	A1, B17, B31
36	6.0	9.15	8.15	A1, B17
POS.	DIM. F	DIM. G	DIM. H	"K"

A

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity		
		CHK			
		APVD	NAME		
		PRODUCT SPEC	PCI EXPRESS CARD EDGE CONNECTOR VERTICAL, DIP TYPE, 3GIO		
		APPLICATION SPEC			
		WEIGHT	SIZE	CAGE CODE	DRAWING NO
		CUSTOMER DRAWING	A3	00779	C=1734774
			SCALE	SHEET	REV
				4 OF 5	G



4

3


2

1

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

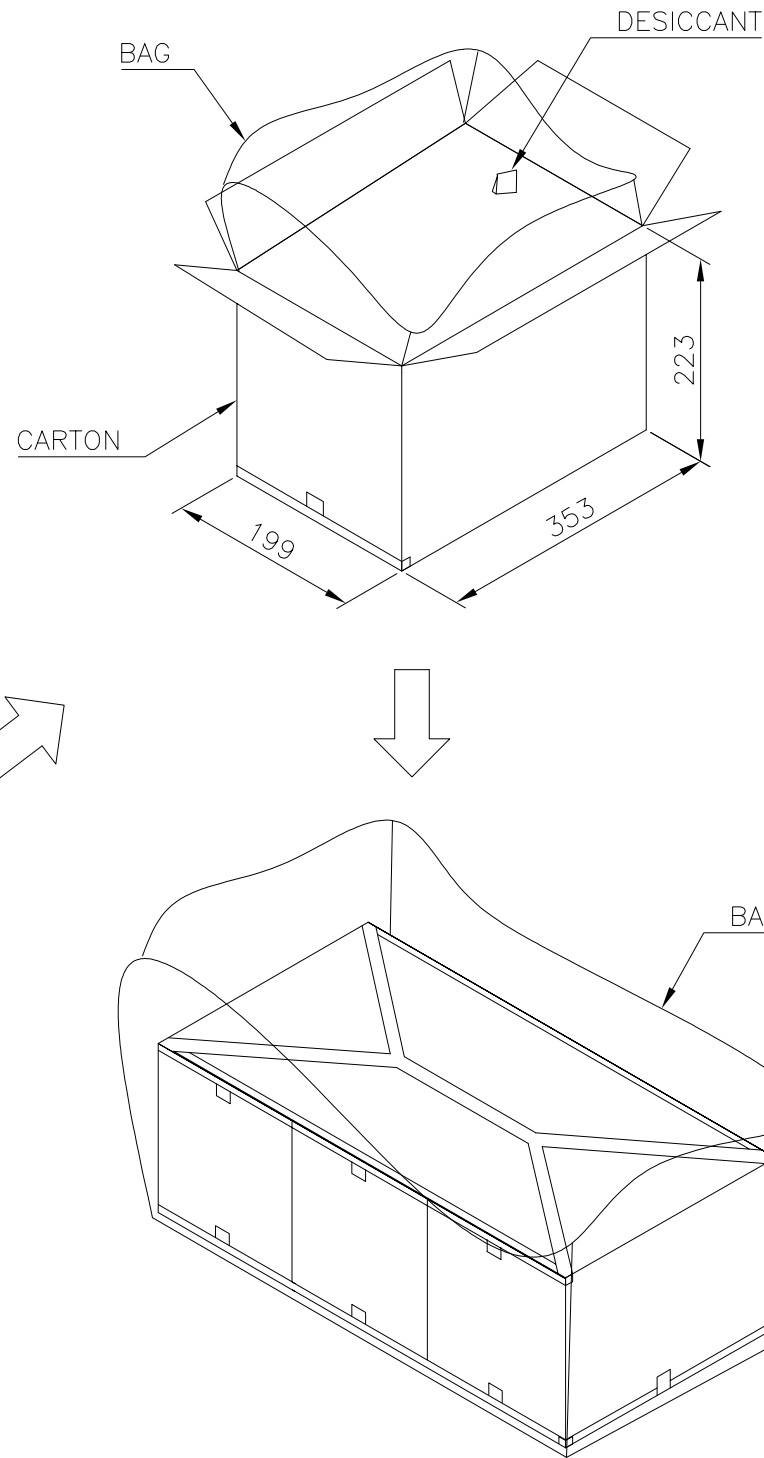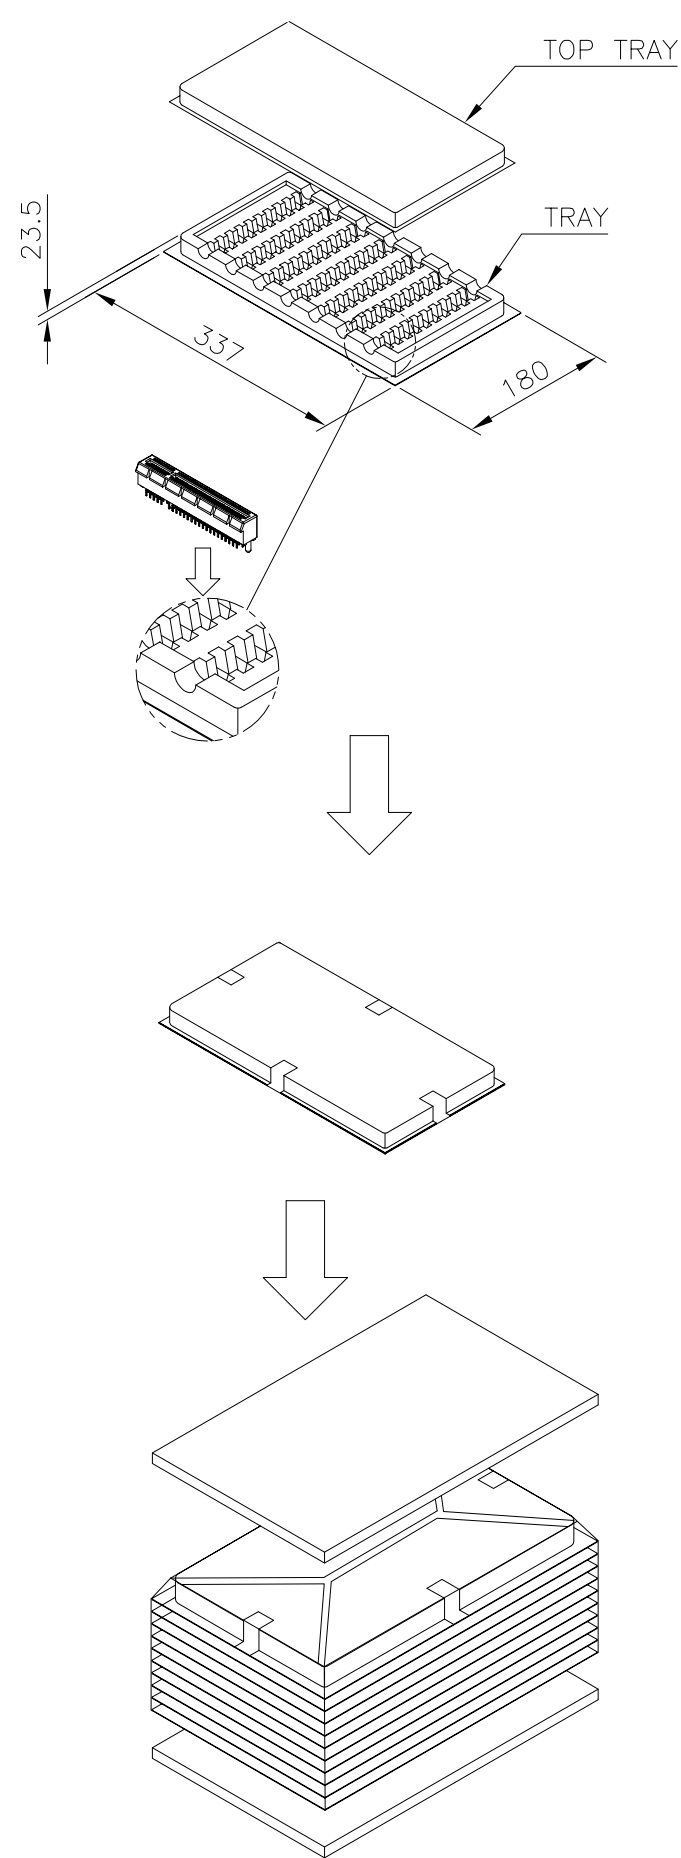

- NOTES :
- MATERIAL :
TRAY : PVC, COLOR: TRANSPARENT.
CARTON: CORRUGATED FIBER
BOX: CORRUGATED FIBER
 - DIMENSION :
TRAY: SEE DRAWING
CARTON: SEE DRAWING
BOX : SEE DRAWING
 - QUANTITY : SEE TABLE
 - WEIGHT : SEE TABLE

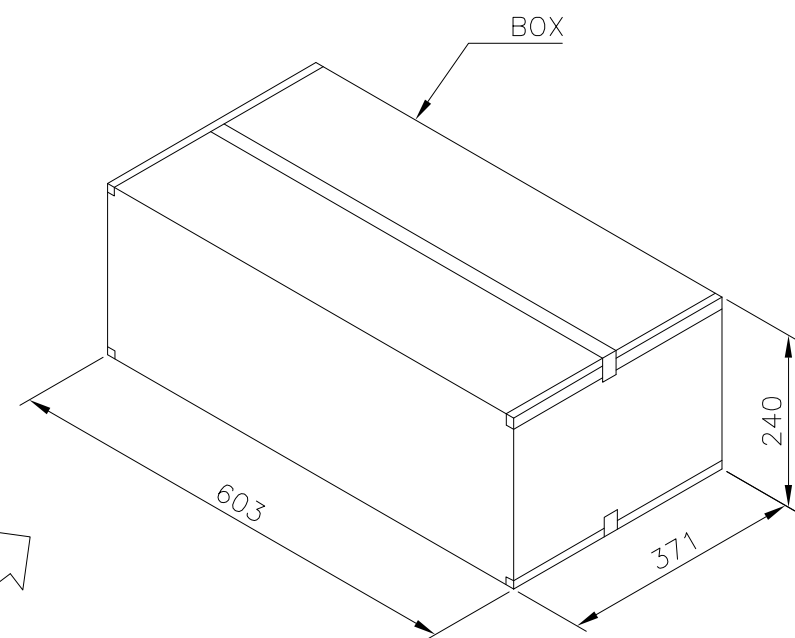

10.2 Kg	8.2 Kg	30	10	3	900	164
9.0 Kg	7.0 Kg	40	10	3	1200	98
8.5 Kg	6.5 Kg	60	10	3	1800	64
7.6 Kg	5.6 Kg	70	10	3	2100	36
GROSS WEIGHT	NET WEIGHT	PCS/ TRAY	TRAY/ CARTON	CARTON/ BOX	PCS/ BOX	POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE Connectivity	
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD			
0 PLC ± -		PRODUCT SPEC			
1 PLC ± -		APPLICATION SPEC		NAME	
2 PLC ± -		WEIGHT		SIZE	
3 PLC ± -		CUSTOMER DRAWING		CAGE CODE	
4 PLC ± -		SCALE		DRAWING NO	
ANGLES ± -		SHEET		RESTRICTED TO	
FINISH		5 of 5		REV G	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.