




80 A VRPower[®], Smart Power Stage With Current Sensing and Temperature Monitor

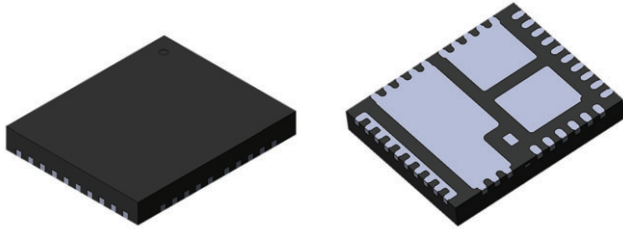

DESCRIPTION

The SiC830 is an integrated power stage solution optimized for synchronous buck applications to offer high current, high efficiency, and high power density performance. Packaged in Vishay's proprietary 5 mm x 6 mm MLP package, SiC830 enables voltage regulator design to deliver in excess of 80 A per phase current.

The internal power MOSFETs utilize Vishay's state-of-the-art TrenchFET[®] Gen IV technology that delivers industry bench mark performance to significantly reduce switching and conduction losses.

The SiC830 incorporates an advanced MOSFET gate driver IC that features high current driving capability, adaptive dead-time control, and integrated bootstrap switch, a thermal monitor that alerts the system of excessive junction temperature. This driver is also compatible with wide range of PWM controllers with the support of both 3.3 V and 5 V PWM logic with tri-state. Diode emulation mode can be enabled at light loads through the use of GLCTRL signal. The device also integrates a current monitor to provide a real time scale down of inductor current (I_{MON}). A temperature monitor provides the system an indication of the power stage internal temperature (T_{MON}) and can be used to throttle the system operation down to a safer level if needed. The device also integrates fault alerts such as HS FET overcurrent, over temperature and HS MOSFET short failures.

FEATURES

- Thermally enhanced PowerPAK[®] MLP56-39L package
- Optimize MOSFET switching performance with integrated Schottky diode in LS MOSFET
- Up to 80 A continuous current
- High frequency operation up to 2 MHz
- Power MOSFETs optimized for 12 V to 19 V input stage and 10 % to 15 % duty cycle operation
- 3.3 V / 5 V PWM logic with tri-state and hold-off
- PWM minimum controllable on time of 30 ns
- Diode emulation mode at light loads for high efficiency over the full load range using GLCTRL pin
- Low PWM propagation delay (< 20 ns)
- Current sense monitor (I_{MON})
- Temperature monitor (T_{MON})
- Over temperature alert
- HS MOSFET over-current and short alert
- Under voltage lockout for V_{DRV} and $BOOT$
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

APPLICATIONS

- Synchronous buck converters
- Multi-phase VRDs for CPU, GPU, and memory
- DC/DC VR modules

EFFICIENCY

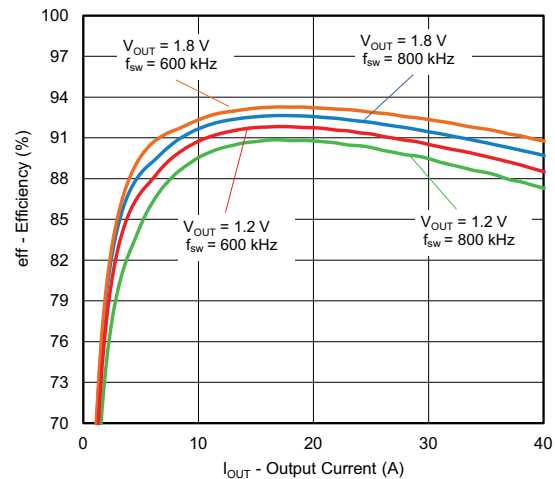


Fig. 1 - Efficiency vs. Output Current ($V_{IN} = 12 V$, $L = 150 nH$, $V_{CC} = V_{DRV} = 5 V$)



“For more details, please contact VRPower@vishay.com”



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.