

General Specifications

Electrical Capacity (Resistive Load)

Logic Level: 0.4VA maximum @ 28V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance: 80 milliohms maximum
Insulation Resistance: 500 megohms minimum @ 500V DC
Dielectric Strength: 500V AC minimum for 1 minute minimum
Mechanical Life: 100,000 operations minimum
Electrical Life: 100,000 operations minimum
10,000 operations minimum @ 0.1A @ 28V AC/DC
Nominal Operating Force: 1.30N
Angle of Throw: 28°

Materials & Finishes

Actuator: Polyamide
Case: Glass fiber reinforced polyamide
Sealing Rings: Nitrile butadiene rubber
Movable Contacts: Phosphor bronze with gold plating
Stationary Contacts: Phosphor bronze with gold plating
Base: Glass fiber reinforced polyamide
Power Terminals: Phosphor bronze with gold plating
Lamp Terminals: Phosphor bronze with gold plating

Environmental Data

Operating Temperature Range: -25°C through +55°C (-13°F through +131°F)
Humidity: 90 ~ 95% humidity for 240 hours @ 40°C (104°F)
Vibration: 10 ~ 500Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

PCB Processing

Soldering: Wave Soldering recommended. See Profile A in Supplement section.
Manual Soldering: See Profile A in Supplement section.
Cleaning: Automated cleaning. See Cleaning specifications in Supplement section.

Standards & Certifications

The G Series toggles have not been tested for UL recognition or CSA certification. These switches are designed for use in a low-voltage, low-current, logic-level circuit. When used as intended in a logic-level circuit, the results do not produce hazardous energy.

Distinctive Characteristics

Fully illuminated toggle for highly visible status indication with LED in red, green, or amber for single color and red/green for bicolor.


Ultra-miniature size allows high density mounting, and extremely light weight makes these switches ideal for handheld equipment.

Totally sealed body construction prevents contact contamination and allows time- and money-saving automated soldering and cleaning.


Molded-in, epoxy sealed terminals lock out flux, solvents, and other contaminants.

Award-winning STC contact mechanism with benefits unavailable in conventional mechanisms: smooth, positive detent actuation, increased contact stability, and unparalleled logic-level reliability. (Additional STC details in Terms & Acronyms; see Supplement section.)

.100" x .100" (2.54mm x 2.54mm) terminal spacing conforms to standard PC board grid spacing. Round terminals facilitate easier through-hole mounting on PC boards.

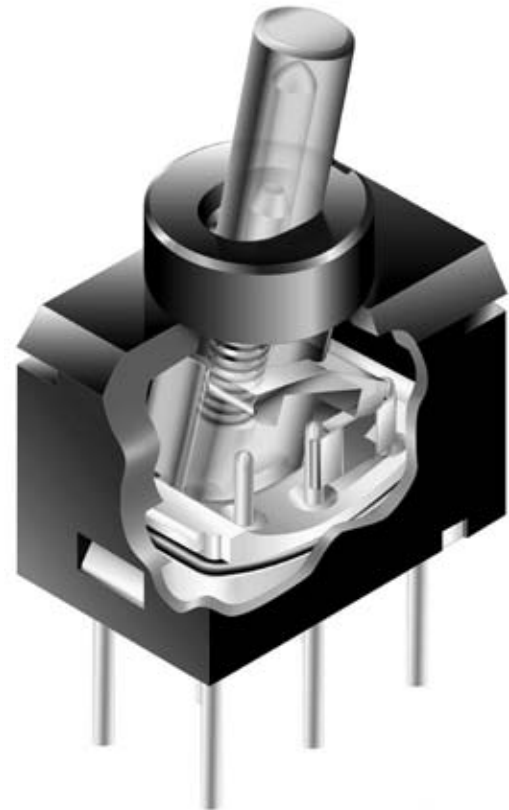

Actual Size

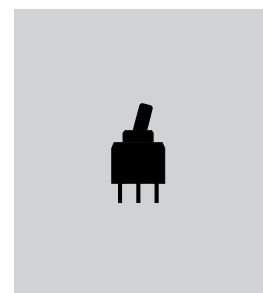

A

Toggles

Rockers

Pushbuttons

Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch

Indicators

Accessories

Supplement

TYPICAL SWITCH ORDERING EXAMPLE

| | | | | | | |
|-------------|--|----------|----------|-----------------|---------------------|------------------------|
| G | 1 | 2 | J | H | C | |
| Pole | Circuits | | | Actuator | PC Terminals | LEDS |
| 1 SPDT | 2 ON NONE ON | Clear | | | P Straight | Single Color |
| | Combines with single color or bicolor LEDs | | | | H Right Angle | C Red |
| | 3 ON OFF ON | | | | V Vertical | D Amber |
| | Combines with bicolor LED only | | | | | F Green |
| | | | | | | ON-NONE-ON only |
| | | | | | | Bicolor |
| | | | | | | CF Red/Green |
| | | | | | | ON-NONE-ON & ON-OFF-ON |

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE
G12JHC


SPDT — ON-NONE-ON Circuit — Clear Toggle, Red LED — Right Angle PC Terminals

POLES & CIRCUITS

| Pole Throw | Model | Toggle Position | | | Connected Terminals | | | Schematics | |
|------------|------------|-----------------|-------------|----------|---------------------|--------------|------------|---|-------------|
| | | Up | Center | Down | Up | Center | Down | Note: Terminal numbers are not actually on the switch. LED circuit is isolated and requires an external power source. | |
| SPDT | G12 G13 | ON ON | NONE OFF | ON ON | 2-3 2-3 | NONE OPEN | 2-1 2-1 | Single Color | Bicolor |

ACTUATOR

J Clear Toggle



LED COLORS & SPECIFICATIONS


| | Colors | Single Color | | | Bicolor |
|--|--------------|--|-------------------|-------------------|------------------------|
| | | C Red | D Amber | F Green | CF Red/Green |
| LEDs are an integral part of the switch and not available separately. The electrical specifications shown are determined at a basic temperature of 25°C. | | | | | |
| Forward Peak Current | I_{FM} | 30mA | 30mA | 25mA | 30mA/25mA |
| Typical Forward Current | I_F | 20mA | 20mA | 20mA | 20mA/20mA |
| Forward Voltage | V_F | 2.0V | 2.0V | 2.1V | 2.0V/2.1V |
| Reverse Peak Voltage | V_{RM} | 5V | 5V | 5V | 5V/5V |
| Current Reduction Rate Above 25°C | ΔI_F | 0 - No current Reduction Rate within Ambient Temperature Range | | | |
| Ambient Temperature Range | | -25° ~ +55°C | | | |

If the source voltage exceeds the rated voltage, a ballast resistor is required.


The resistor value can be calculated by using the formula in the Supplement; see Supplement Index.

PC TERMINALS


P Straight

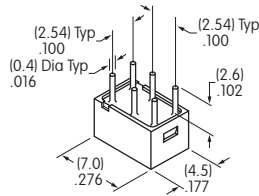




H Right Angle

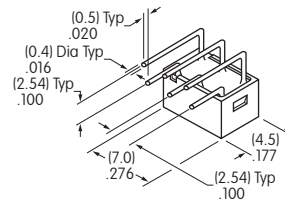

V Vertical

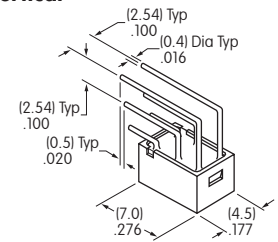

TYPICAL SWITCH DIMENSIONS

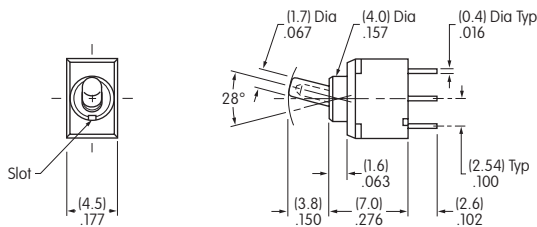



Straight PC



5 & 6 are LED terminals; 4 is a support pin on single color models & an LED terminal on bicolor models.

G12JPC




Right Angle PC

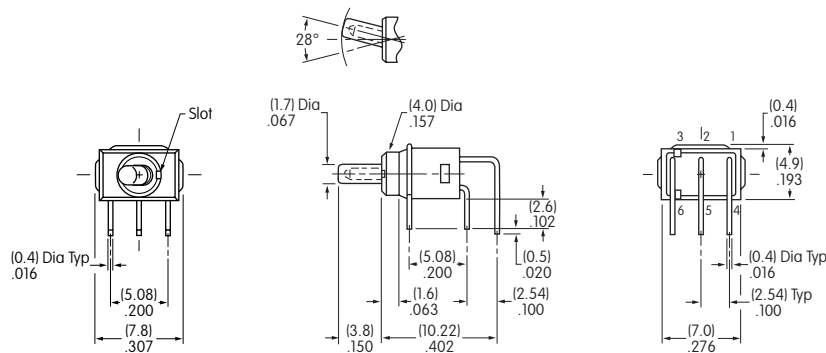

5 & 6 are LED terminals; 4 is a support pin on single color models & an LED terminal on bicolor models.

G12JHD

Vertical PC

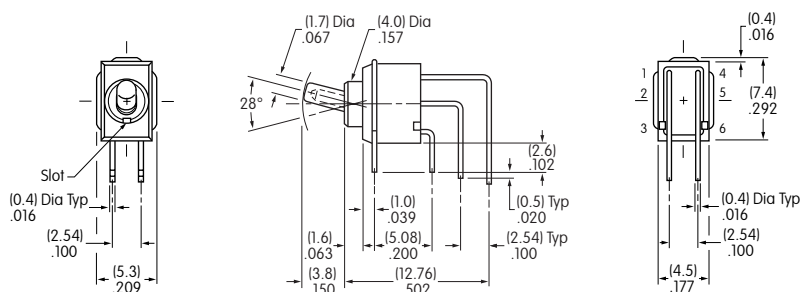

5 & 6 are LED terminals; 4 is a support pin on single color models & an LED terminal on bicolor models.

G12JVCF



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.