

FLM BK ETH M12 DI 8 M12-2TX


Order No.: 2736916



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2736916>

The Ethernet bus coupler opens a local bus for up to 16 devices. Additional functions: 10 Mbps and 100 Mbps, auto negotiation, auto crossover, 8 digital inputs, channel-specific diagnostics, short-circuit and overload protection, M12 fast connection technology.

Ethernet

| Commercial data | |
|--------------------------|---|
| GTIN (EAN) |  |
| sales group | L040 |
| Pack | 1 pcs. |
| Customs tariff | 85389091 |
| Catalog page information | Page 369 (AX-2009) |

Product notes

WEEE/RoHS-compliant since: 12/08/2009



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Product description

The Fieldline Modular FLM BK ETH M12 DI8 M12 bus coupler with 8 digital inputs couples a Fieldline Modular local bus station to an Ethernet network and is also used for measuring digital signals. The bus coupler consists of two Ethernet connections that are designed as D-encoded M12 sockets. Additional Ethernet devices can be connected due to the integrated, manageable 3-port switch to implement a line structure. The transmission speeds are 10 Mbps and 100 Mbps and are automatically selected by the device (autonegotiation). The interfaces can automatically interchange the receive and transmit cables (autocrossover). Following network protocols are supported by the FLM BK ETH M12 DI8 M12 bus coupler:

- Modbus/TCP
- Modbus/UDP
- DDI (Device Driver Interface)

The Ethernet bus coupler provides a powerful local bus as lower-level bus. The total length of the local bus is 20 m and it can connect up to 16 I/O units. Selectable transmission speeds in the range 500 kBaud to 2 Mbaud allow for flexible adaptation to the application and also permit savings on warehousing costs. The local bus connection is provided by 5-pos. B-encoded M12 connectors. The four double-occupied sensor slots can be assigned through 5-pos. A-encoded M12 connectors with sensors in 2, 3 or 4 conductor technology respectively.

The sensor supply is short-circuit and overload-protected and thus guarantees a high plant availability. The diagnosis and status indicators for voltage supply, network and local bus operation with the corresponding monitoring functions reduce bus downtime and provide support if service becomes necessary.

The high-performance SPEEDCON technology used allows connection times to be reduced by up to 90%. The classic M12 connections can continued to be used with full compatibility.

Technical data

General data

| | |
|--|---|
| Width | 70 mm |
| Height | 178 mm |
| Depth | 50 mm |
| Drill hole spacing | 178 mm |
| Weight | 280 g |
| Mounting type | Wall mounting |
| Ambient temperature (operation) | -25 °C ... 60 °C |
| Ambient temperature (storage/transport) | -25 °C ... 85 °C |
| Permissible humidity (storage/transport) | 95 % |
| Air pressure (operation) | 80 kPa ... 106 kPa (up to 2000 m above sea level) |
| Air pressure (storage/transport) | 70 kPa ... 106 kPa (up to 3000 m above sea level) |
| Degree of protection | IP65/67 |
| Protection class | III, IEC 61140, EN 61140, VDE 0140-1 |
| Test section | To I/O 500 V DC |

Interface

| | |
|------------------------------|---------------------------------------|
| Fieldbus system | Ethernet |
| Name | Ethernet |
| Type of connection | M12 plug connectors, D-coded |
| Designation connection point | Copper cable |
| Transmission speed | 10/100 Mbps, autonegotiation |
| | 10/100 MBit/s (mit Autonegotiation) |

| | |
|---------------------|---|
| Number of positions | 4 |
|---------------------|---|

Local bus gateway

| | |
|----------------------------------|-------------------------------------|
| Name | Local bus gateway |
| Type of connection | M12 connector, B-coded |
| Transmission speed | 500 kBaud/ 2 MBaud, can be selected |
| Max. number of local bus devices | 16 |
| Max. length of local bus | 20 m |

Power supply for module electronics

| | |
|----------------------|--|
| Type of connection | M12 male connector |
| Name | U_L |
| Supply voltage | 24 V DC |
| Supply voltage range | 18 V DC ... 30 V DC IEC 61131-2 (including ripple) |
| Supply current | < 100 mA |

Fieldline potential routing

| | |
|--------------------------------|---|
| Voltage supply U_L | 24 V DC |
| Power supply at U_L | max. 4 A |
| Current consumption from U_L | max. 118 mA (At 2 Mbaud) |
| | Typ. 118 mA (At 2 Mbaud) |
| | max. 60 mA (At 500 kBaud) |
| | Typ. 60 mA (At 500 kBaud) |
| Voltage supply U_s | 24 V DC |
| Power supply at U_s | max. 4 A |
| Current consumption from U_s | Typ. 5 mA (plus power supply for sensors) |
| | max. 600 mA |

Digital inputs

| | |
|--------------------------|--|
| Input name | Digital inputs |
| Description of the input | EN 61131-20 type 1 |
| Type of connection | M12 male connector |
| Connection method | 2, 3, 4-wire |
| Number of inputs | 8 |
| Protective circuit | Short-circuit protection, overload protection of the sensor supply Protection against polarity reversal |
| Filter time | 3 ms |

| | |
|--------------------------------|---------------------|
| Input characteristic curve | IEC 61131-2 type 1 |
| Input voltage | 24 V DC |
| Input voltage range "0" signal | -30 V DC ... 5 V DC |
| Input voltage range "1" signal | 13 V DC ... 30 V DC |

Certificates / Approvals



| | |
|-------------------|---------------|
| Certification | CUL, UL |
| Certification Ex: | CUL-EX, UL-EX |

Accessories

| Item | Designation | Description |
|------------------------|---------------------------|---|
| Cable/conductor | | |
| 1518368 | SAC-5P- 2,0-186/FS SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Free conductor end, on Socket, straight M12-SPEEDCON, A-coded, Cable length: 2 m |
| 1518371 | SAC-5P- 5,0-186/FS SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Free conductor end, on Socket, straight M12-SPEEDCON, A-coded, Cable length: 5 m |
| 1518384 | SAC-5P-10,0-186/FS SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Free conductor end, on Socket, straight M12-SPEEDCON, A-coded, Cable length: 10 m |
| 1518397 | SAC-5P-15,0-186/FS SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Free conductor end, on Socket, straight M12-SPEEDCON, A-coded, Cable length: 15 m |
| 1518407 | SAC-5P-MS/ 0,3-186/FS SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Plug, straight M12-SPEEDCON, A-coded, on Socket, straight M12-SPEEDCON, A-coded, Cable length: 0.3 m |
| 1518410 | SAC-5P-MS/ 0,5-186/FS SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Plug, straight M12-SPEEDCON, A-coded, on Socket, straight M12-SPEEDCON, A-coded, Cable length: 0.5 m |
| 1518423 | SAC-5P-MS/ 1,0-186/FS SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Plug, straight M12-SPEEDCON, A-coded, on Socket, straight M12-SPEEDCON, A-coded, Cable length: 1 m |
| 1518326 | SAC-5P-MS/ 2,0-186 SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Plug, straight M12-SPEEDCON, A-coded, on Free conductor end, Cable length: 2 m |

| | | |
|---------|---------------------------|--|
| 1518436 | SAC-5P-MS/ 2,0-186/FS SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Plug, straight M12-SPEEDCON, A-coded, on Socket, straight M12-SPEEDCON, A-coded, Cable length: 2 m |
| 1518339 | SAC-5P-MS/ 5,0-186 SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Plug, straight M12-SPEEDCON, A-coded, on Free conductor end, Cable length: 5 m |
| 1518449 | SAC-5P-MS/ 5,0-186/FS SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Plug, straight M12-SPEEDCON, A-coded, on Socket, straight M12-SPEEDCON, A-coded, Cable length: 5 m |
| 1518342 | SAC-5P-MS/10,0-186 SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Plug, straight M12-SPEEDCON, A-coded, on Free conductor end, Cable length: 10 m |
| 1518452 | SAC-5P-MS/10,0-186/FS SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Plug, straight M12-SPEEDCON, A-coded, on Socket, straight M12-SPEEDCON, A-coded, Cable length: 10 m |
| 1518355 | SAC-5P-MS/15,0-186 SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Plug, straight M12-SPEEDCON, A-coded, on Free conductor end, Cable length: 15 m |
| 1518465 | SAC-5P-MS/15,0-186/FS SCO | Sensor/Actuator cable, 5-position, PUR, Black-gray RAL 7021, Plug, straight M12-SPEEDCON, A-coded, on Socket, straight M12-SPEEDCON, A-coded, Cable length: 15 m |
| 1657575 | VS-M12MSD-RJ45-931/ 1,0 | Assembled Ethernet cable, CAT5e, shielded, 2-pair, AWG 26 stranded (7-wire), RAL 5021 (water blue), M12 4-pos. D-coded on RJ45 connector, length: 1 m |
| 1657588 | VS-M12MSD-RJ45-931/ 2,0 | Assembled Ethernet cable, CAT5e, shielded, 2-pair, AWG 26 stranded (7-wire), RAL 5021 (water blue), M12 4-pos. D-coded on RJ45 connector, length: 2 m |
| 1657591 | VS-M12MSD-RJ45-931/ 5,0 | Assembled Ethernet cable, CAT5e, shielded, 2-pair, AWG 26 stranded (7-wire), RAL 5021 (water blue), M12 4-pos. D-coded on RJ45 connector, length: 5 m |

General

| | | |
|---------|--------------------------------|--|
| 1524006 | SAC-4P-M12MSD/ 2,0-930 | Bus system cable, 4-position, PUR, halogen-free, water blue RAL 5021, shielded, Plug, straight M12, D-coded, on Free conductor end, Cable length: 2 m |
| 1521533 | SAC-4P-M12MSD/ 2,0-930/ M12MSD | Bus system cable, 4-position, PUR, halogen-free, water blue RAL 5021, shielded, Plug, straight M12, D-coded, on Plug, straight M12, D-coded, Cable length: 2 m |
| 1524051 | SAC-4P-M12MSD/ 5,0-930/ M12MSD | Bus system cable, 4-position, PUR, halogen-free, water blue RAL 5021, shielded, Plug, straight M12, D-coded, on Plug, straight M12, D-coded, Cable length: 5 m |
| 1524022 | SAC-4P-M12MSD/10,0-930 | Bus system cable, 4-position, PUR, halogen-free, water blue RAL 5021, shielded, Plug, straight M12, D-coded, on Free conductor end, Cable length: 10 m |
| 1524035 | SAC-4P-M12MSD/15,0-930 | Bus system cable, 4-position, PUR, halogen-free, water blue RAL 5021, shielded, Plug, straight M12, D-coded, on Free conductor end, Cable length: 15 m |

| | | |
|---------|--------------------------|---|
| 1521258 | SACC-M12MSD-4CON-PG 7-SH | Bus system plug connector, male, straight, 4-pos., M12, shielded, D-coded, screw connection, metal knurl, cable screw connection Pg7 |
| 1521261 | SACC-M12MSD-4CON-PG 9-SH | Bus system plug connector, male, straight, 4-pos., M12, shielded, D-coded, screw connection, metal knurl, cable screw connection Pg9 |
| 1657562 | VS-M12MSD-RJ45-931/ 0,5 | Assembled Ethernet cable, CAT5e, shielded, 2-pair, AWG 26 stranded (7-wire), RAL 5021 (water blue), M12 4-pos. D-coded on RJ45 connector, length: 0.5 m |

Marking


| | | |
|---------|-------------------|---|
| 0809735 | ZBF 12:UNBEDRUCKT | Zack strip, flat, unprinted, 5-section, divisible, for labeling by the customer |
| 2809128 | ZBN 18:UNBEDRUCKT | Unprinted marker labels, strips with 5 labels for individual labeling with M-PEN or CMS system, for terminal block width: 17.5 mm, color: White |

Plug/Adapter


| | | |
|---------|------------------|---|
| 1508200 | SACC-M12FS-5SC M | Sensor/actuator connector, female, straight, 5-pos., M12, A-coded, spring-cage connection, metal knurl, cable cross section max. 8 mm |
| 1508187 | SACC-M12MS-5SC M | Sensor/actuator connector, male, straight, 5-pos., M12, A-coded, spring-cage connection, metal knurl, cable cross section max. 8 mm |

Diagrams/Drawings

Connection diagram

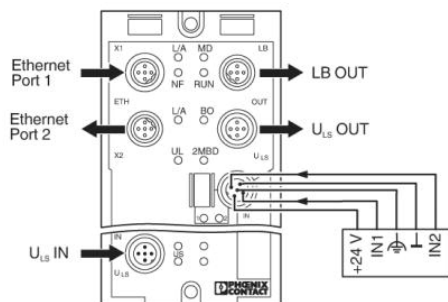

Dimensioned drawing

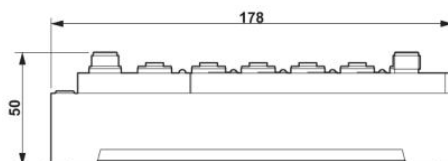

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.