


# Type CD Low Resistance Precision Chip Resistors

Page 1 of 2

## Low Resistance Chip down to $0.010\Omega$ at $\pm 1\%$ with unique Pedestal Terminal Design for Current Sense in Hybrid and SMT Applications

Type CD Low Resistance Precision Chip Resistors utilize the proven Caddock Micronox® resistance films to achieve the unique low resistance range in this family. The special performance features of the Type CD Low Resistance Precision Film Resistor include:


- **Style FC** - Flip Chip version for surface mount applications.
- **Style WB** - Wire Bond version for hybrid applications with metallized back surface for solder down heat sinking of the chip, includes bondable termination pedestals to receive aluminum wire bonds.
- Resistance as low as  $0.010\Omega$  at  $\pm 1\%$ .
- Pedestal terminals in this design provide an ultra low resistance connection pad which maintains the precision  $0.010\Omega \pm 1\%$  at the point of customer Kelvin connection to the resistor chip. The pedestal terminal with its copper core also provides heat spreading which enhances the high power handling capability.
- Thermal resistance is provided to optimize high power designs when utilizing higher thermal conductivity circuit board substrates such as IMS or Alumina.
- High pulse handling and overload capability.
- Low inductance provides excellent high frequency and pulse response.

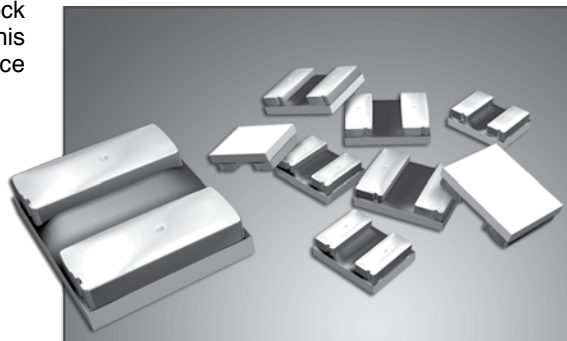

**Style FC - Flip Chip Version** is a surface mount version with solderable pedestal terminals for flip chip soldering.

| Model    | Resistance |        | Power Capability Information                                     |                                                                                                                |                          | Dimensions in inches and (millimeters) |                           |                           |                          | Comments            |
|----------|------------|--------|------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|--------------------------|----------------------------------------|---------------------------|---------------------------|--------------------------|---------------------|
|          |            |        | General Applications<br>Power Rating<br>at 70° C<br>(see note 1) | High Power Applications<br>Thermal Resistance - R <sub>θJC</sub><br>Film (J) to Solder Pad (C)<br>(see note 2) | Max. Chip<br>Temperature |                                        |                           |                           |                          |                     |
|          | Min.       | Max.   | A                                                                | B                                                                                                              | C                        | D                                      |                           |                           |                          |                     |
| CD2015FC | 0.010 Ω    | 0.20 Ω | 1.0 Watt                                                         | 12.0°C/Watt                                                                                                    | 150°C                    | .200 ±.012<br>(5.08 ±.30)              | .150 ±.012<br>(3.81 ±.30) | .063 ±.006<br>(1.60 ±.15) | .062 min.<br>(1.57 min.) | Solderable Pedestal |
| CD2520FC | 0.010 Ω    | 0.20 Ω | 1.5 Watts                                                        | 9.0°C/Watt                                                                                                     | 150°C                    | .250 ±.012<br>(6.35 ±.30)              | .200 ±.012<br>(5.08 ±.30) | .063 ±.006<br>(1.60 ±.15) | .078 min.<br>(1.98 min.) | Solderable Pedestal |

### Style FC Derating Curve For General Applications

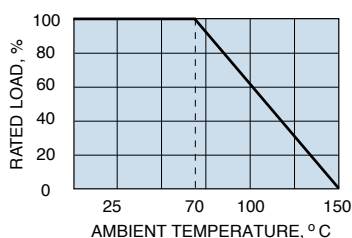


**Note 1: General Applications** - The power rating for general applications is based upon 0.5 sq. in. (300 mm<sup>2</sup>) of termination pad or trace area (2 oz. copper) connected to each end of the resistor. Maximum chip temperature is  $150^\circ\text{C}$ . Use Derating Curve to derate appropriately for the maximum ambient temperature and for the temperature limitations of the adjacent materials.

**Note 2: Thermal Resistance** - In High Power Applications where the circuit board material provides high heat sinking benefits (such as IMS, Alumina, or other) the thermal resistance of the chip resistor is useful to establish the maximum power capability of the chip resistor in the application. The film temperature is measured at the center of the resistor element and solder pad temperature at the center of the solderable pedestal (point X in the recommended circuit layout shown below). Maximum temperature of the chip resistor (at the center of chip) should not exceed  $150^\circ\text{C}$  through the temperature range of the application.

### Recommended Circuit Board Layout (current and sense connections):

Fig. 1A: Recommended Kelvin layout.

C = Current connection  
S = Sense connection



Note: Actual width of current trace is based on magnitude of current. Point of connection should be in the area shown.

### CD2015FC Standard Resistance Values:

Tolerance CD2015FC  $\pm 1\%$  Standard.

|               |               |               |
|---------------|---------------|---------------|
| $0.010\Omega$ | $0.030\Omega$ | $0.075\Omega$ |
| $0.015\Omega$ | $0.033\Omega$ | $0.10\Omega$  |
| $0.020\Omega$ | $0.040\Omega$ | $0.20\Omega$  |
| $0.025\Omega$ | $0.050\Omega$ |               |

### CD2520FC Standard Resistance Values:

Tolerance CD2520FC  $\pm 1\%$  Standard.

|               |               |               |
|---------------|---------------|---------------|
| $0.010\Omega$ | $0.030\Omega$ | $0.075\Omega$ |
| $0.015\Omega$ | $0.033\Omega$ | $0.10\Omega$  |
| $0.020\Omega$ | $0.040\Omega$ | $0.20\Omega$  |
| $0.025\Omega$ | $0.050\Omega$ |               |

Custom resistance values and non-standard tolerances can be manufactured for high quantity applications. Please contact Caddock Applications Engineering.

# Type CD Low Resistance Precision Chip Resistors

Page 2 of 2


**Style WB - Wire Bond Version** is a hybrid mountable version with copper pedestal terminals and an aluminum surface layer for wire bonding. The back surface of these devices is metallized for solder attachment of the chip resistor to a heat sinking substrate.

| Model     | Resistance     |               | Power Capability Information                             |                       | Dimensions in inches and (millimeters) |                                     |                                     |                          | Comments                                                                                         |
|-----------|----------------|---------------|----------------------------------------------------------|-----------------------|----------------------------------------|-------------------------------------|-------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------|
|           |                |               | Thermal Resistance                                       | Max. Chip Temperature |                                        |                                     |                                     |                          |                                                                                                  |
|           | Min.           | Max.          | $R_{thJC}$<br>Film (J) to Solder Pad (C)<br>(see note 3) |                       | A                                      | B                                   | C                                   | D                        |                                                                                                  |
| CD2015WBA | 0.010 $\Omega$ | 0.20 $\Omega$ | 8.33°C/Watt                                              | 150°C                 | .200 $\pm$ .012<br>(5.08 $\pm$ .30)    | .150 $\pm$ .012<br>(3.81 $\pm$ .30) | .061 $\pm$ .005<br>(1.55 $\pm$ .13) | .062 min.<br>(1.57 min.) | Terminals have an Aluminum surface layer for wire bonding. Aluminum wire to be used for bonding. |
| CD2520WBA | 0.010 $\Omega$ | 0.20 $\Omega$ | 5.00°C/Watt                                              | 150°C                 | .250 $\pm$ .012<br>(6.35 $\pm$ .30)    | .200 $\pm$ .012<br>(5.08 $\pm$ .30) | .061 $\pm$ .005<br>(1.55 $\pm$ .13) | .078 min.<br>(1.98 min.) | Terminals have an Aluminum surface layer for wire bonding. Aluminum wire to be used for bonding. |

**Note 3: Thermal Resistance** - In High Power Applications where the circuit board material provides high heat sinking benefits (such as IMS, Alumina, or other) the thermal resistance of the chip resistor is useful to establish the maximum power capability of the chip resistor in the application. The film temperature is measured at the center of the resistor element and the solder pad temperature is measured at the soldered interface with the circuit board. Maximum temperature of the chip resistor (at the center of chip) should not exceed 150°C through the temperature range of the application.

## Location for Sense (Potential) Connection:

Note: The sense connection for each pedestal is positioned inboard of the current connection (single or multiple current wires).

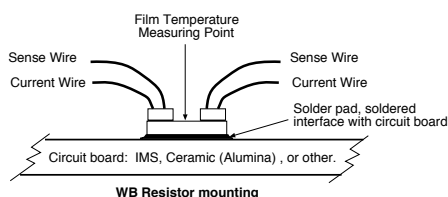

## CD2015WBA

### Standard Resistance Values:

Tolerance CD2015WBA  $\pm$ 1% Standard.

|                |                |                |
|----------------|----------------|----------------|
| 0.010 $\Omega$ | 0.030 $\Omega$ | 0.075 $\Omega$ |
| 0.015 $\Omega$ | 0.033 $\Omega$ | 0.10 $\Omega$  |
| 0.020 $\Omega$ | 0.040 $\Omega$ | 0.20 $\Omega$  |
| 0.025 $\Omega$ | 0.050 $\Omega$ |                |

## CD2520WBA

### Standard Resistance Values:

Tolerance CD2520WBA  $\pm$ 1% Standard.

|                |                |                |
|----------------|----------------|----------------|
| 0.010 $\Omega$ | 0.030 $\Omega$ | 0.075 $\Omega$ |
| 0.015 $\Omega$ | 0.033 $\Omega$ | 0.10 $\Omega$  |
| 0.020 $\Omega$ | 0.040 $\Omega$ | 0.20 $\Omega$  |
| 0.025 $\Omega$ | 0.050 $\Omega$ |                |

Custom resistance values and non-standard tolerances can be manufactured for high quantity applications. Please contact Caddock Applications Engineering.

## General Information for Type CD - Style FC and Style WB - Chip Resistors

### Specifications:

**Temperature Coefficient:** TC referenced to +25°C,  $\Delta R$  taken at +150°C.

0.050 ohm to 0.20 ohm, 0 to +100 ppm/°C.  
0.010 ohm to 0.049 ohm, 0 to +200 ppm/°C.

**Inductance:** Less than 5 nH typical.

**Load Life:** 1000 hours at rated power, based upon 150°C max. chip temperature,  $\Delta R \pm (0.5\% + 0.0005 \text{ ohm})$ .

**Momentary Overload:** 1.5 times rated power, for 5 seconds,  $\Delta R \pm (0.5\% + 0.0005 \text{ ohm})$ .

**Operating Temperature:** -55°C to +150°C.

**Measurement Note:** All measurements are taken using Kelvin connections per the recommended connection locations.

### Solder attachment notes:

During soldering of the Type CD Resistor the soldering temperature profile must not cause the pedestal terminals of this device to exceed 220°C.

**Style FC - Flip Chip version** resistors have a bare ceramic back surface. The recommended solder for flip chip solder attachment is 62Sn / 36Pb / 2Ag.


**Style WB - Wire Bond version** resistors have a metallized back surface for soldering to a substrate or a heat sink. The recommended solder is 62Sn / 36Pb / 2Ag.

### Packaging information:

**Style FC**, flip chip resistors, are shipped with the bare ceramic side up in the pocket, with the solderable pedestals facing down.

**Style WB**, wire bondable resistors, are shipped with the wire bondable pedestals facing up in the pocket.

The illustration shows the orientation of the CD2015 chip resistors in the tape. The CD2520 chip resistors are rotated 90° from what is shown in the illustration.

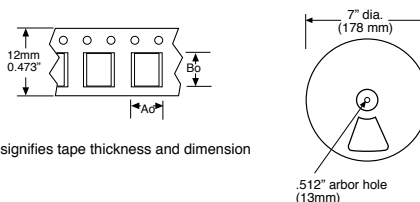

Ko signifies tape thickness and dimension

|    | Size 2015       | Size 2520       |
|----|-----------------|-----------------|
| Ao | 0.189" (4.80mm) | 0.271" (6.88mm) |
| Bo | 0.209" (5.31mm) | 0.216" (5.49mm) |
| Ko | 0.087" (2.21mm) | 0.066" (1.68mm) |


Carrier Tape and pocket dimensions:  
Tape is 12mm Carrier Tape (8mm pitch)

Full reel quantities:

1000 pieces per reel for CD2015 and CD2520

Quantities of less than 250 will be shipped in tape without reel and without tape leader at the option of Caddock.

Tape dimensions and materials will be consistent with EIA-481-1. Reels will be marked with a label containing Caddock logo, part number, resistor value, tolerance, packaging date, and quantity.

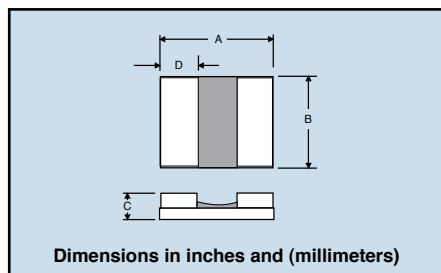

### Ordering Information:

**Physical Size**  
2015 = 0.200" x 0.150"  
2520 = 0.250" x 0.200"

**CD 2520 FC - 0.10 - 1%**

**Type CD**  
Style: FC or WBA

**Resistor Value ( $\Omega$ )**  
See charts for availability

**Tolerance:**  
 $\pm$ 1% 0.010  $\Omega$  and above.

**Applications Engineering**  
17271 North Umpqua Hwy.  
Roseburg, Oregon 97470-9422  
Phone: (541) 496-0700  
Fax: (541) 496-0408

**CADDOCK ELECTRONICS, INC.**

e-mail: caddock@caddock.com • web: www.caddock.com  
For Caddock Distributors listed by country see caddock.com/contact/dist.html

**Sales and Corporate Office**  
1717 Chicago Avenue  
Riverside, California 92507-2364  
Phone: (951) 788-1700  
Fax: (951) 369-1151



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.