

# MP800 Series Kool-Pak® Power Film Resistors

## TO-220 Style and TO-126 Style - Non-Inductive Designs

Page 1 of 2

Use your thermal design experience with power semiconductors in TO-220 and TO-126 style power packages to help you get the most out of this unique family of power resistors. The thermal design issues are the same where power handling capability is based on the case temperature which is maintained in your design.

### MP820 and MP821 TO-220 Style Power Package with Metal Mounting Tab

- **20 Watts at +25°C Case Temperature** derated to zero at +175°C.
- **Metal Heat Sink Mounting Tab.**
- **MP820 Resistance Range of 10.0 ohm to 10.0 K.**
- **MP821 Resistance Range of 0.020 ohm to 9.99 ohm.**
- **Resistor element is electrically isolated from the mounting surface.**
- **Non-Inductive design for high speed switching, snubbers, and rf applications.**

#### Construction of MP820 and MP821:

The MP820 and MP821 Kool-Tab® Power Film Resistors are constructed with Caddock's Micronox® resistance film fired onto a flat ceramic substrate which is thermally bonded to the copper heat sink tab. The resistor body is then molded with a high temperature molding compound to finish the metal tab TO-220 package. The lead wire attachment and resistance element geometry are configured to provide outstanding non-inductive performance.

### MP825 and MP850 Power Film Resistors Include an Integral Metal Mounting Surface for Highly Efficient Thermal Transfer

#### MP825 TO-126 Style Power Package

- **25 Watts at +25°C Case Temperature** derated to zero at +150°C.
- **Copper Heat Sink Integral in the Molded Package.**
- **Resistance Range of 0.020 ohm to 10.0 K.**
- **Resistor element is electrically isolated from the mounting surface.**
- **Non-inductive Design.**

#### MP850 TO-220 Style Power Package

- **50 Watts at +25°C Case Temperature** derated to zero at +150°C.
- **Copper Heat Sink Integral in the Molded Package.**
- **Resistance Range of 0.20 ohm to 10.0 K.**
- **Resistor element is electrically isolated from the mounting surface.**
- **Non-inductive Design.**

#### Construction of MP825 and MP850:

The MP825 and MP850 Kool-Pak® Power Film Resistors are constructed with Caddock's Micronox® resistance film fired onto a flat ceramic substrate. **The ceramic substrate is bonded to a copper heat sink which becomes the metal mounting surface.** This assembly is molded with the copper heat sink flush with the back surface of the part. The terminal attachment and resistance element geometry are configured to provide outstanding non-inductive performance.


#### Ordering Information:

Model Number: **MP850 - 50.0 - 1%** Tolerance  
Resistor Value: \_\_\_\_\_

**Packaging:** MP800 Series Resistors are packaged in plastic shipping tubes, 50 pieces per tube when the order quantity permits.

For custom resistance values and tolerances contact applications engineering

Certain products shown in this catalog are covered by one or more patents, there are also patents pending.

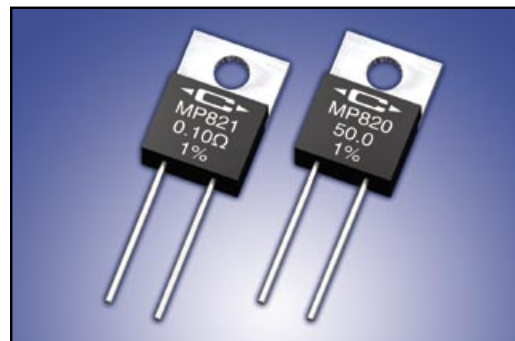

#### MP821 Standard Resistance Values:


Tolerance MP821: ±1% Standard (0.5%, 2%, 5%, 10%, and 20% are available for most resistance values).

|         |         |        |        |        |        |
|---------|---------|--------|--------|--------|--------|
| 0.020 Ω | 0.050 Ω | 0.25 Ω | 0.75 Ω | 3.00 Ω | 7.50 Ω |
| 0.025 Ω | 0.075 Ω | 0.30 Ω | 1.00 Ω | 3.30 Ω | 8.00 Ω |
| 0.030 Ω | 0.10 Ω  | 0.33 Ω | 1.50 Ω | 4.00 Ω |        |
| 0.033 Ω | 0.15 Ω  | 0.40 Ω | 2.00 Ω | 5.00 Ω |        |
| 0.040 Ω | 0.20 Ω  | 0.50 Ω | 2.50 Ω |        |        |

#### MP820 Standard Resistance Values:

Tolerance MP820: ±1% Standard (0.5%, 2%, 5%, 10%, and 20% are available for most resistance values).

|        |        |        |       |        |        |
|--------|--------|--------|-------|--------|--------|
| 10.0 Ω | 30.0 Ω | 75.0 Ω | 300 Ω | 750 Ω  | 3.30 K |
| 12.0 Ω | 33.0 Ω | 100 Ω  | 330 Ω | 1.00 K | 4.00 K |
| 15.0 Ω | 40.0 Ω | 120 Ω  | 400 Ω | 1.50 K | 5.00 K |
| 20.0 Ω | 47.0 Ω | 150 Ω  | 470 Ω | 2.00 K | 7.50 K |
| 25.0 Ω | 50.0 Ω | 200 Ω  | 500 Ω | 2.50 K | 10.0 K |
| 27.0 Ω | 56.0 Ω | 250 Ω  | 560 Ω | 3.00 K |        |

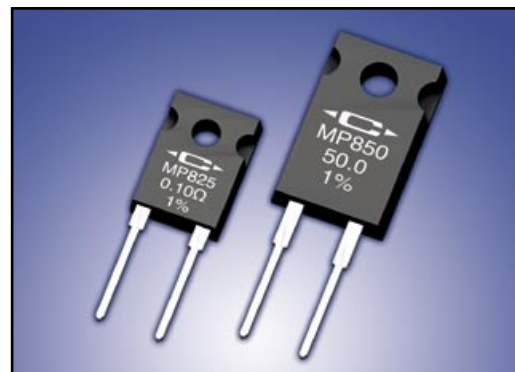

#### MP825 Standard Resistance Values:

Tolerance MP825: ±1% standard (except as noted), (0.5%, 2%, 5%, 10%, and 20% are available for most resistance values).

|            |        |        |        |        |        |
|------------|--------|--------|--------|--------|--------|
| 0.020 Ω 5% | 0.30 Ω | 4.00 Ω | 33.0 Ω | 300 Ω  | 3.00 K |
| 0.025 Ω 5% | 0.33 Ω | 5.00 Ω | 40.0 Ω | 330 Ω  | 3.30 K |
| 0.030 Ω 5% | 0.40 Ω | 7.50 Ω | 47.0 Ω | 400 Ω  | 4.00 K |
| 0.033 Ω 5% | 0.50 Ω | 8.00 Ω | 50.0 Ω | 470 Ω  | 5.00 K |
| 0.040 Ω 5% | 0.75 Ω | 10.0 Ω | 56.0 Ω | 500 Ω  | 7.50 K |
| 0.050 Ω    | 1.00 Ω | 12.0 Ω | 75.0 Ω | 560 Ω  | 10.0 K |
| 0.075 Ω    | 1.50 Ω | 15.0 Ω | 100 Ω  | 750 Ω  |        |
| 0.10 Ω     | 2.00 Ω | 20.0 Ω | 120 Ω  | 1.00 K |        |
| 0.15 Ω     | 2.50 Ω | 25.0 Ω | 150 Ω  | 1.50 K |        |
| 0.20 Ω     | 3.00 Ω | 27.0 Ω | 200 Ω  | 2.00 K |        |
| 0.25 Ω     | 3.30 Ω | 30.0 Ω | 250 Ω  | 2.50 K |        |

#### MP850 Standard Resistance Values:

Tolerance MP850: ±1% standard, (0.5%, 2%, 5%, 10%, and 20% are available for most resistance values).


|        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|
| 0.20 Ω | 2.00 Ω | 12.0 Ω | 50.0 Ω | 330 Ω  | 2.50 K |
| 0.25 Ω | 2.50 Ω | 15.0 Ω | 56.0 Ω | 400 Ω  | 3.00 K |
| 0.30 Ω | 3.00 Ω | 20.0 Ω | 75.0 Ω | 470 Ω  | 3.30 K |
| 0.33 Ω | 3.30 Ω | 25.0 Ω | 100 Ω  | 500 Ω  | 4.00 K |
| 0.40 Ω | 4.00 Ω | 27.0 Ω | 120 Ω  | 560 Ω  | 5.00 K |
| 0.50 Ω | 5.00 Ω | 30.0 Ω | 150 Ω  | 750 Ω  | 7.50 K |
| 0.75 Ω | 7.50 Ω | 33.0 Ω | 200 Ω  | 1.00 K | 10.0 K |
| 1.00 Ω | 8.00 Ω | 40.0 Ω | 250 Ω  | 1.50 K |        |
| 1.50 Ω | 10.0 Ω | 47.0 Ω | 300 Ω  | 2.00 K |        |

**Applications Engineering**  
17271 North Umpqua Hwy.  
Roseburg, Oregon 97470-9422  
Phone: (541) 496-0700  
Fax: (541) 496-0408

**CADDOCK ELECTRONICS, INC.**  
e-mail: [caddock@caddock.com](mailto:caddock@caddock.com) • web: [www.caddock.com](http://www.caddock.com)  
For Caddock Distributors listed by country see [caddock.com/contact/dist.html](http://caddock.com/contact/dist.html)

**Sales and Corporate Office**  
1717 Chicago Avenue  
Riverside, California 92507-2364  
Phone: (951) 788-1700  
Fax: (951) 369-1151

| Model No. | Package      | Resistance     |               | Power Rating | Max. Voltage  | Thermal Resistance $R_{\theta JC}$<br>Film (J) to Case (C) | Max. Temp.<br>$T_{MAX}$ | Dimensions | Comments  |
|-----------|--------------|----------------|---------------|--------------|---------------|--|-------------------------|------------|---|
|           |              | Min.           | Max.          |              |               |  |                         |            |   |
| MP820     | TO-220 Style | 10.0 $\Omega$  | 10.0 K        | 20 Watts*    | 300           | 7.50°C/Watt  | 175°C                   | Figure 1   | Metal Mounting Tab                                |
| MP821     | TO-220 Style | 0.020 $\Omega$ | 9.99 $\Omega$ | 20 Watts*    | Power Limited | 7.50°C/Watt  | 175°C                   | Figure 1   | Metal Mounting Tab                                |
| MP825     | TO-126 Style | 0.020 $\Omega$ | 10.0 K        | 25 Watts*    | 300           | 5.00°C/Watt  | 150°C                   | Figure 2   | Integral Metal Mounting Surface in Molded Package |
| MP850     | TO-220 Style | 0.20 $\Omega$  | 10.0 K        | 50 Watts*    | 300           | 2.50°C/Watt  | 150°C                   | Figure 3   | Integral Metal Mounting Surface in Molded Package |

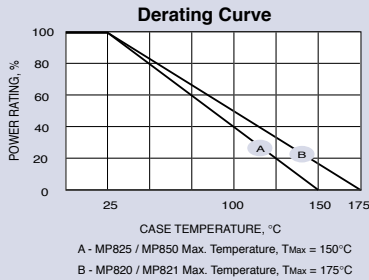

#### \* Derating Using Case Temperature ( $T_C$ ):

All power and associated overload ratings are derated based upon case temperature using the derating curve. The case temperature is measured at the center of the metal mounting surface, with the part properly mounted and under electrical load. Without a heat sink, when in free air at +25°C, the MP820, MP821, and MP850 are rated for 2.25 watts, the MP825 is rated for 1.25 watts.


The thermal design should satisfy the following equation:

Case Temperature ( $T_C$ ) + [Thermal Resistance ( $R_{\theta JC}$ ) x power applied (Watts)]  $\leq T_{MAX}$  considering the full operating temperature range of the application.


**Mounting Note:** Mount on a smooth, clean and flat heat sink surface with a thermal interface material, such as thermal grease. The entire exposed metal backface portion must be in thermal contact with the heat sink. When screw mounting, use a compression washer which provides a mounting force of 150 to 300 pounds (665 to 1330 N). This will provide sufficient pressure on the package over time and through large temperature variations to maintain the maximum power dissipation capability. Mounting torque to avoid package damage is 8 in-lbs (0.90 N-m). If a spring clip is used, a clip force of 8 to 30 pounds (35 to 130 N) is recommended to be applied to the center of the package. The clip should be round or smooth in the contact area to avoid concentrating the load on a small point of the plastic body of the package. Another mounting option is to use a pressure bar method which can achieve a greater mounting force with a greater contact area.

For additional applications information regarding mounting and pulse handling see the Caddock Applications Notes at [caddock.com](http://caddock.com) or contact Applications Engineering.


**Figure 1**  
**Metal Tab**  
**TO-220 Style**  
**MP820 and MP821**

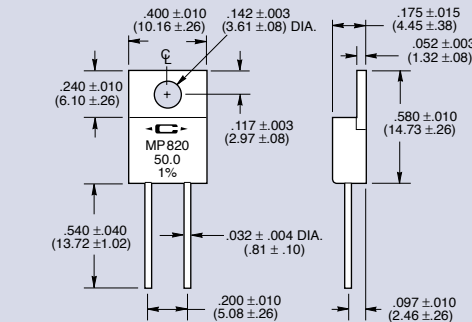

**Figure 2**  
**TO-126 Style**  
**MP825**

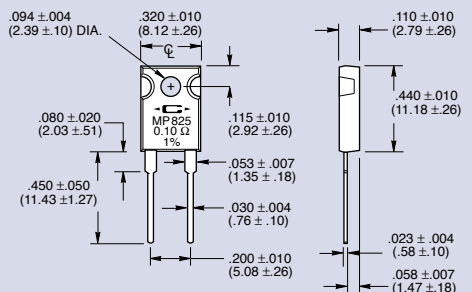

**Figure 3**  
**TO-220 Style**  
**MP850**

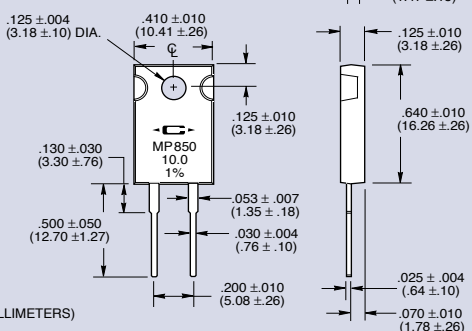

DIMENSIONS IN INCHES AND (MILLIMETERS)

## Specifications:

### Temperature Coefficient:

TC referenced to +25°C,  $\Delta R$  taken at  $T_{MAX}$

5.00 ohms and above, -20 to +50 ppm/°C  
0.50 ohm to 4.99 ohms, -20 to +80 ppm/°C  
0.050 ohm to 0.49 ohm, 0 to +200 ppm/°C  
0.020 ohm to 0.049 ohm, 0 to +300 ppm/°C

**Operating Temperature:** -55°C to  $T_{MAX}$

**Inductance:** 10nH typical in series when measured at a point 0.2 inches from the resistor body.

**DWV:** The dielectric strength rating of 1500 V<sub>rms</sub> AC is based upon connections made between terminals shorted and either the metal surface the part is mounted to or a metal clip in contact with the top surface of the part.

**Insulation Resistance:** 10,000 Megohms, min.

The resistor element is electrically isolated from the mounting surface.

**Load Stability:** 2,000 hours at rated power.

$\Delta R \pm(1.0 \text{ percent} + 0.001 \text{ ohm})$  max. Power rating dependent upon case temperature. See derating curve.

### Momentary Overload:

MP820, MP821, MP850: 2 times rated power with applied voltage not to exceed 1.5 times maximum continuous operating voltage for 5 seconds.  $\Delta R \pm(0.3 \text{ percent} + 0.001 \text{ ohm})$  max.

MP825: 1.5 times rated power with applied voltage not to exceed 1.5 times maximum continuous operating voltage for 5 seconds.  $\Delta R \pm(0.3 \text{ percent} + 0.001 \text{ ohm})$  max.

**Moisture Resistance:** Mil-Std-202, Method 106.  $\Delta R \pm(0.5 \text{ percent} + 0.001 \text{ ohm})$  max.

**Thermal Shock:** Mil-Std-202, Method 107, Cond. F.  $\Delta R \pm(0.3 \text{ percent} + 0.001 \text{ ohm})$  max.

**Shock:** 100G, Mil-Std-202, Method 213, Cond. I.  $\Delta R \pm(0.2 \text{ percent} + 0.001 \text{ ohm})$  max.

**Vibration, High Frequency:** Mil-Std-202, Method 204, Cond. D.  $\Delta R \pm(0.2 \text{ percent} + 0.001 \text{ ohm})$  max.

**Terminal Strength:** Mil-Std-202, Method 211, Cond. A (Pull Test) 5 lbs.  $\Delta R \pm(0.2 \text{ percent} + 0.001 \text{ ohm})$  max.

**Terminal Material:** Solderable

**Measurement Note:** For these specifications, resistance measurement shall be made at a point 0.2 inch (5.08 mm) from the resistor body.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.