

## Target Applications


- Wireless charging
- Adapter
- Telecom

## Benefits

- Higher power density designs
- Higher switching frequency
- IR MOSFET - Uses OptiMOS™5 Chip
- Reduced parts count wherever 5V supplies are available
- Driven directly from microcontrollers (slow switching)
- System cost reductions

Typical values (unless otherwise specified)

$V_{DSS}$	$V_{GS}$	$R_{DS(on)}$ (max.)
<b>100V min.</b>	<b>± 20V max</b>	<b>42mΩ @ 10V</b>
$Q_{g\ tot}$	$Q_{gd}$	$V_{gs(th)}$
<b>3.7nC</b>	<b>1.6nC</b>	<b>1.7V</b>

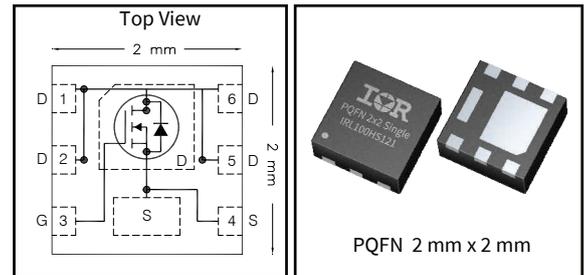

G	D	S
Gate	Drain	Source

Base part number	Package Type	Standard Pack		Orderable Part Number
		Form	Quantity	
IRL100HS121	PQFN 2mm x 2mm	Tape and Reel	4000	IRL100HS121

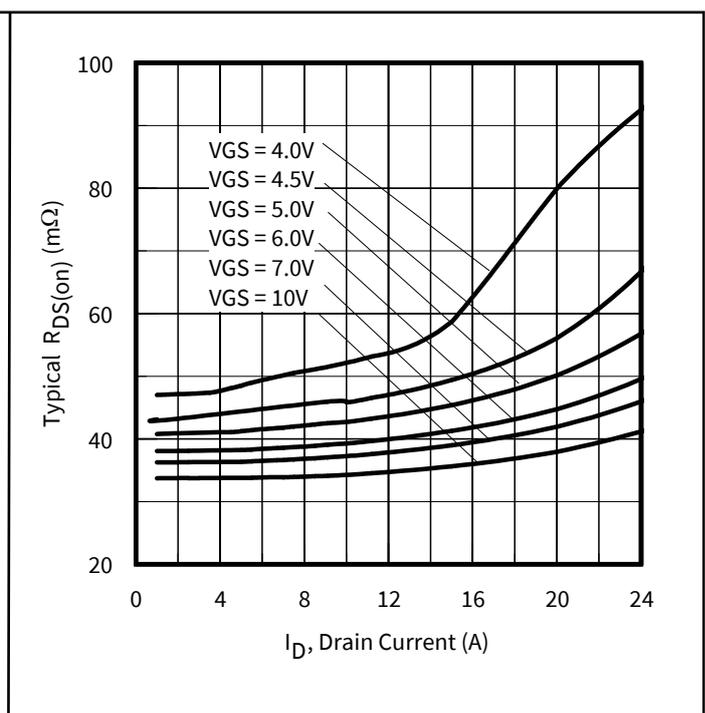
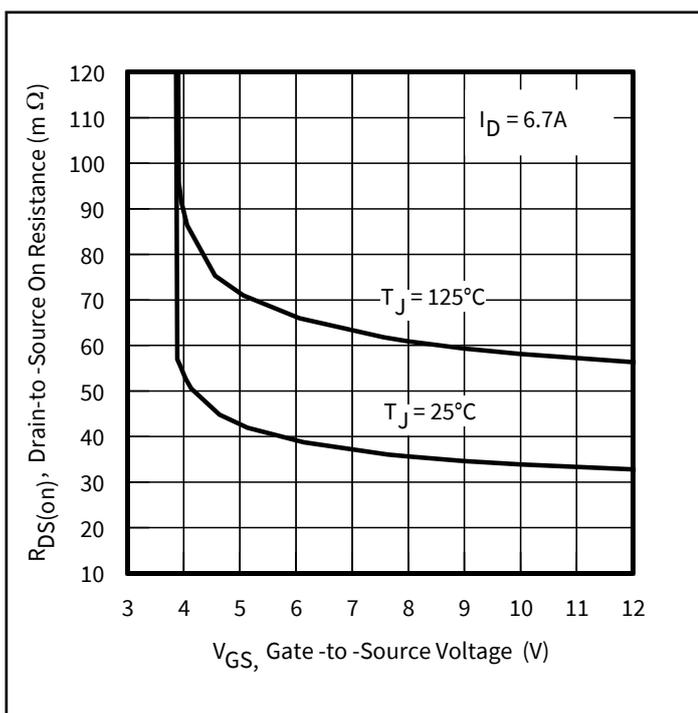


Figure 1 Typical On-Resistance vs. Gate Voltage

Figure 2 Typical On-Resistance vs. Drain Current

**Table of Contents**

**Target Applications .....1**

**Benefits .....1**

**Ordering Table .....1**

**Table of Contents .....2**

**1 Parameters .....3**

**2 Maximum ratings, Thermal, and Avalanche characteristics .....4**

**3 Electrical characteristics .....5**

**4 Electrical characteristic diagrams .....6**

**Package Information .....12**

**Qualification Information .....14**

**Revision History .....15**

# 1 Parameters

**Table1 Key performance parameters**

<b>Parameter</b>	<b>Values</b>	<b>Units</b>
$V_{DS}$	100	V
$R_{DS(on) \max}$	42	$m\Omega$
$I_D @ T_C = 25^\circ C$	11	A
$I_D @ T_A = 25^\circ C$	5.1	A

## 2 Maximum ratings and thermal characteristics

**Table 2 Maximum ratings (at  $T_J = 25^\circ\text{C}$ , unless otherwise specified)**

Parameter	Symbol	Conditions	Values	Unit
Continuous Drain Current (Silicon Limited) ⑥ ⑦	$I_D$	$T_{C(\text{Bottom})} = 25^\circ\text{C}, V_{GS} @ 10\text{V}$	11	A
Continuous Drain Current (Silicon Limited) ⑥	$I_D$	$T_{C(\text{Bottom})} = 100^\circ\text{C}, V_{GS} @ 10\text{V}$	7.8	
Continuous Drain Current (Silicon Limited) ⑦ (Source Bonding Technologies Limited)	$I_D$	$T_{C(\text{Bottom})} = 25^\circ\text{C}, V_{GS} @ 10\text{V}$	10.2	
Continuous Drain Current (Silicon Limited) ⑤	$I_D$	$T_A = 25^\circ\text{C}, V_{GS} @ 10\text{V}$	5.1	
Pulsed Drain Current ①	$I_{DM}$	$T_{C(\text{Bottom})} = 25^\circ\text{C}$	41	W
Maximum Power Dissipation	$P_D$	$T_{C(\text{Bottom})} = 25^\circ\text{C}$	11.5	
Maximum Power Dissipation	$P_D$	$T_{C(\text{Bottom})} = 100^\circ\text{C}$	5.8	
Maximum Power Dissipation	$P_D$	$T_A = 25^\circ\text{C}$	2.5	V
Gate-to-Source Voltage	$V_{GS}$	-	$\pm 20$	
Peak Soldering Temperature	$T_P$	-	270	$^\circ\text{C}$
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-	-55 to + 175	

**Table 3 Thermal characteristics**

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Junction-to-Case (Bottom) ④	$R_{\theta JC}$	-	-	-	13	$^\circ\text{C}/\text{W}$
Junction-to-Case (Top) ④	$R_{\theta JC}$	-	-	-	90	
Junction-to-Ambient ⑤	$R_{\theta JA}$	-	-	-	60	
Junction-to-Ambient ⑤	$R_{\theta JA} (<10\text{s})$	-	-	-	42	

**Table 4 Avalanche characteristics**

Parameter	Symbol	Values	Unit
Single Pulse Avalanche Energy ②	$E_{AS}$	13	mJ
Avalanche Current ②	$I_{AR}$	5.0	A

**Notes:**

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting  $T_J = 25^\circ\text{C}$ ,  $L = 1.0\text{mH}$ ,  $R_G = 50\Omega$ ,  $I_{AS} = 5.0\text{A}$  based on test data.
- ③ Pulse width  $\leq 400\mu\text{s}$ ; duty cycle  $\leq 2\%$ .
- ④  $R_\theta$  is measured at  $T_J$  of approximately  $90^\circ\text{C}$ .
- ⑤ When mounted on a 1 inch square PCB (FR-4). Please refer to AN-994 for more details.
- ⑥ Calculated continuous current based on maximum allowable junction temperature.
- ⑦ Current is limited to 10.2A by source bonding technology.

### 3 Electrical characteristics


**Table 5 Static characteristics**

Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Drain-to-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	100	-	-	V
Breakdown Voltage Temp. Coefficient	$\Delta V_{(BR)DSS}/\Delta T_J$	Reference to 25°C, $I_D = 1mA$	-	44	-	mV/°C
Static Drain-to-Source On-Resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 6.7A$ ③	-	34	42	mΩ
		$V_{GS} = 4.5V, I_D = 3.4A$ ③	-	45	59	
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 10\mu A$	1.1	1.7	2.3	V
Gate Threshold Voltage Temp. Coefficient	$\Delta V_{GS(th)}/\Delta T_J$		-	-5.6	-	mV°/C
Drain-to-Source Leakage Current	$I_{DSS}$	$V_{DS} = 80V, V_{GS} = 0V$	-	-	1.0	μA
Gate-to-Source Forward Leakage	$I_{GSS}$	$V_{GS} = 20V$	-	-	100	nA
	$I_{GSS}$	$V_{GS} = -20V$	-	-	100	
Gate Resistance	$R_G$	-	-	0.9	-	Ω

**Table 6 Dynamic characteristics**

Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Forward Trans conductance	gfs	$V_{DS} = 25V, I_D = 6.7A$	15	-	-	S
Total Gate Charge	$Q_g$	$I_D = 6.7A$ $V_{DS} = 50V$ $V_{GS} = 4.5V$ See Fig.8	-	3.7	5.6	nC
Pre-Vth Gate-to-Source Charge	$Q_{gs1}$		-	0.8	-	
Post-Vth Gate-to-Source Charge	$Q_{gs2}$		-	0.5	-	
Gate-to-Drain Charge	$Q_{gd}$		-	1.6	-	
Gate Charge Overdrive	$Q_{godr}$		-	0.8	-	
Switch Charge ( $Q_{gs2} + Q_{gd}$ )	$Q_{sw}$		-	2.1	-	
Output Charge	$Q_{oss}$	$V_{DS} = 50V, V_{GS} = 0V$	-	9.5	-	nC
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = 50V$	-	7.6	-	ns
Rise Time	$t_r$	$I_D = 6.7A$	-	21	-	
Turn-Off Delay Time	$t_{d(off)}$	$R_G = 2.7\Omega$	-	8.7	-	
Fall Time	$t_f$	$V_{GS} = 4.5V$ ③	-	10.7	-	
Input Capacitance	$C_{iss}$	$V_{GS} = 0V$	-	440	-	pF
Output Capacitance	$C_{oss}$	$V_{DS} = 50V$	-	80	-	
Reverse Transfer Capacitance	$C_{rss}$	$f = 1.0MHz$	-	6.3	-	
Output Capacitance	$C_{oss}$	$V_{GS} = 0V, V_{DS} = 1.0V, f = 1.0MHz$	-	330	-	
Output Capacitance	$C_{oss}$	$V_{GS} = 0V, V_{DS} = 80V, f = 1.0MHz$	-	60	-	

**Table 7 Reverse Diode**

Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Continuous Source Current (Body Diode) ⑥ ⑦	$I_S$	MOSFET symbol showing the integral reverse p-n junction diode. 	-	-	11	A
Pulsed Source Current (Body Diode) ①	$I_{SM}$		-	-	41	
Diode Forward Voltage	$V_{SD}$	$T_J = 25^\circ C, I_S = 6.7A, V_{GS} = 0V$ ③	-	-	1.2	V
Reverse Recovery Time	$t_{rr}$	$T_J = 25^\circ C, I_F = 6.7A, V_{DD} = 50V$	-	22	-	ns
Reverse Recovery Charge	$Q_{rr}$	$di/dt = 100A/\mu s$	-	28	-	nC

### 4 Electrical characteristic diagrams

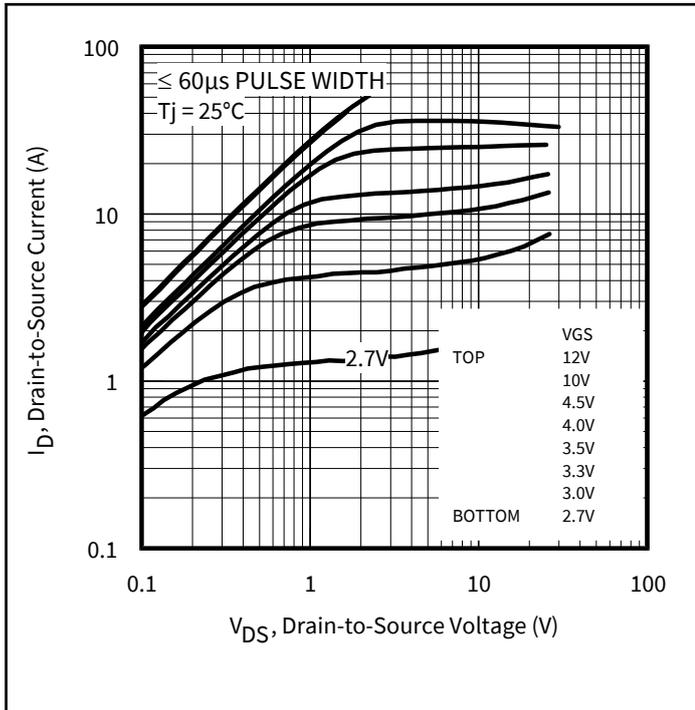


Figure 3 Typical Output Characteristics

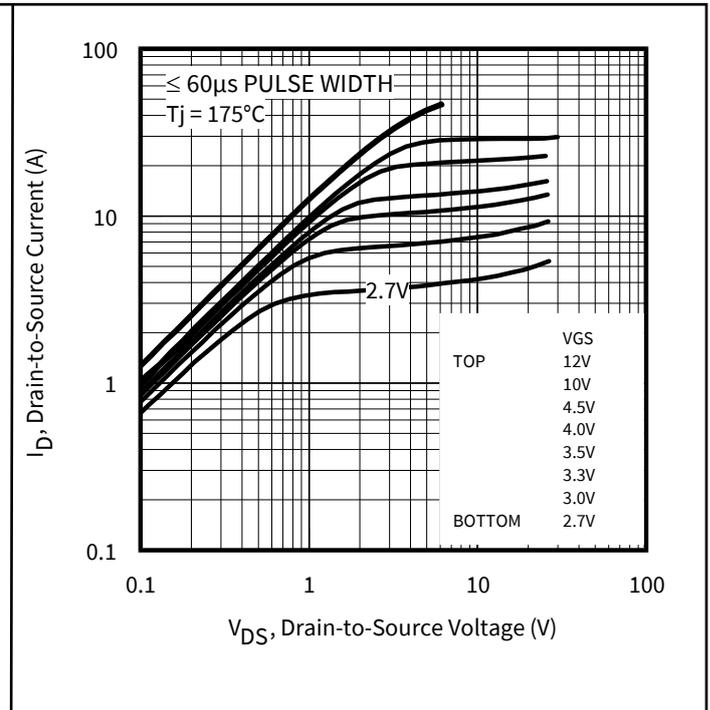


Figure 4 Typical Output Characteristics

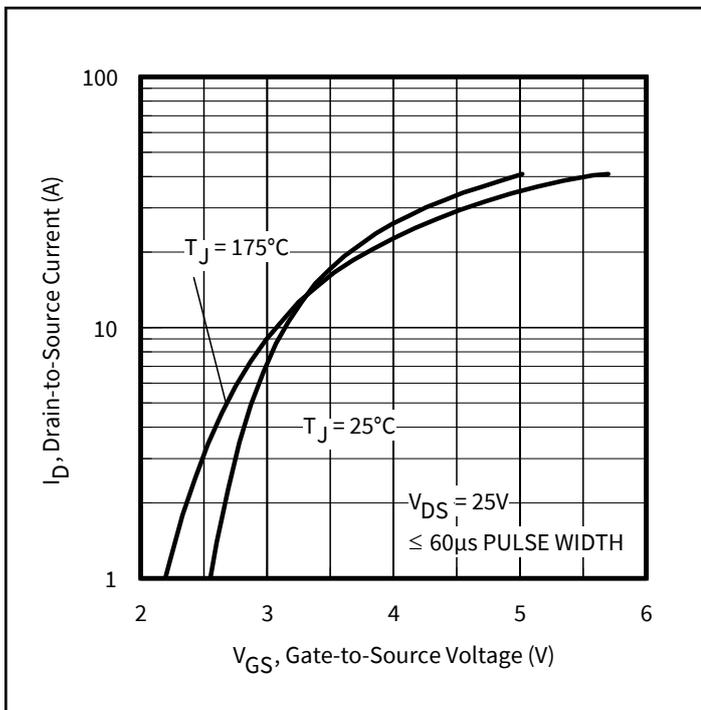


Figure 5 Typical Transfer Characteristics

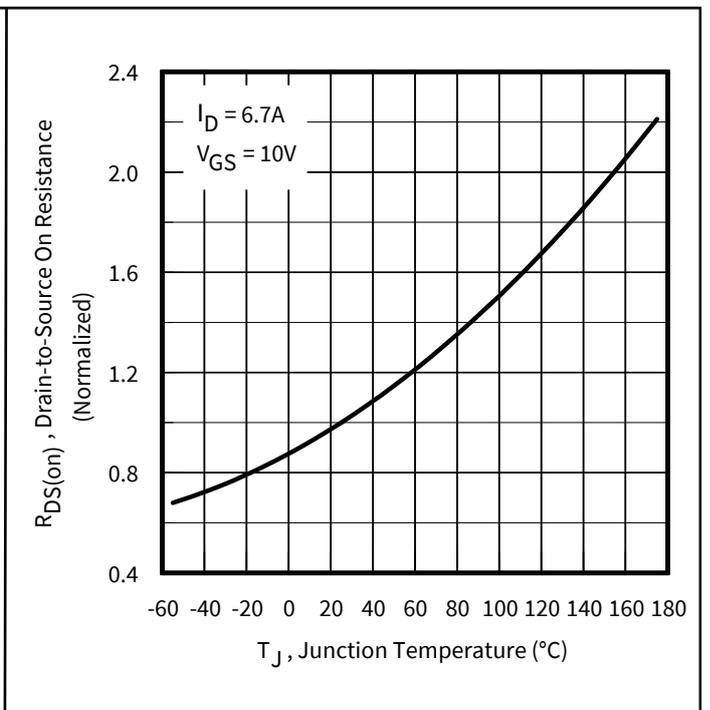


Figure 6 Normalized On-Resistance vs. Temperature

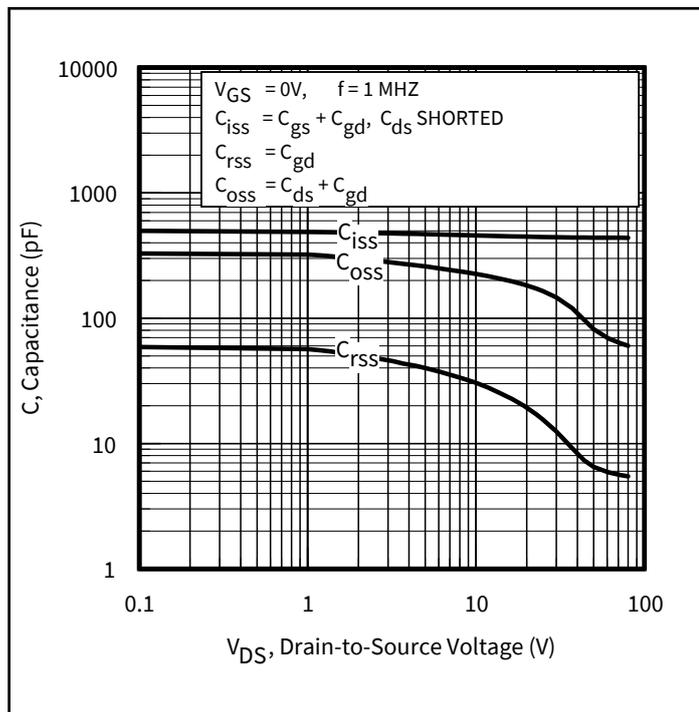


Figure 7 Typical Capacitance vs. Drain-to-Source Voltage

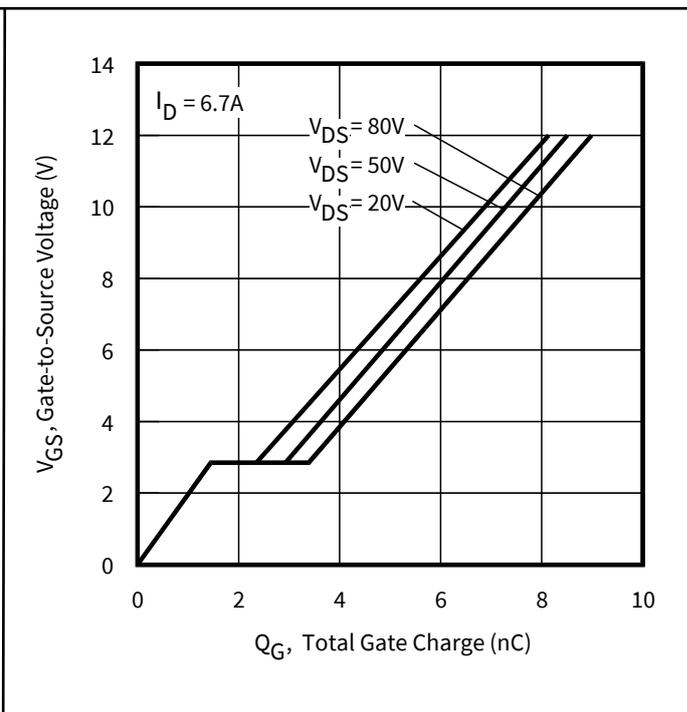


Figure 8 Typical Gate Charge vs. Gate-to-Source Voltage

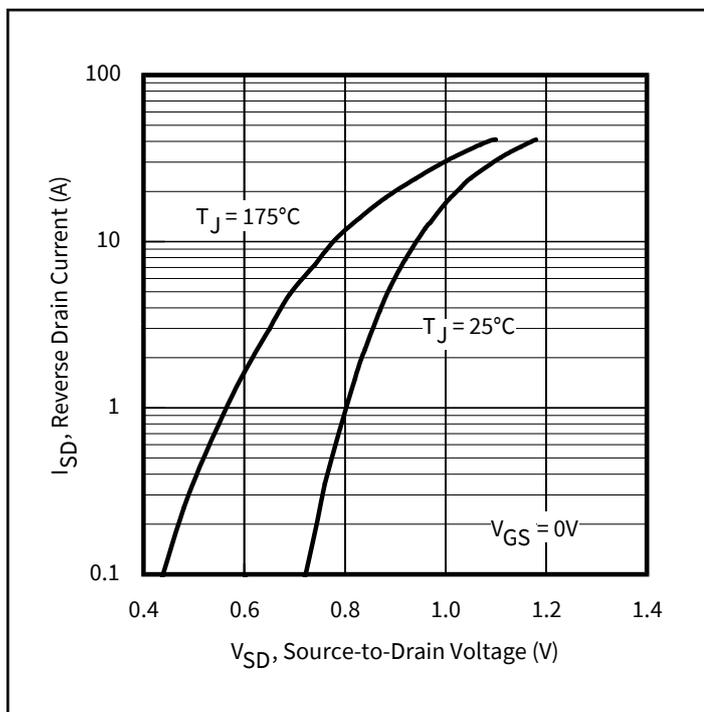


Figure 9 Typical Source-Drain Diode Forward Voltage

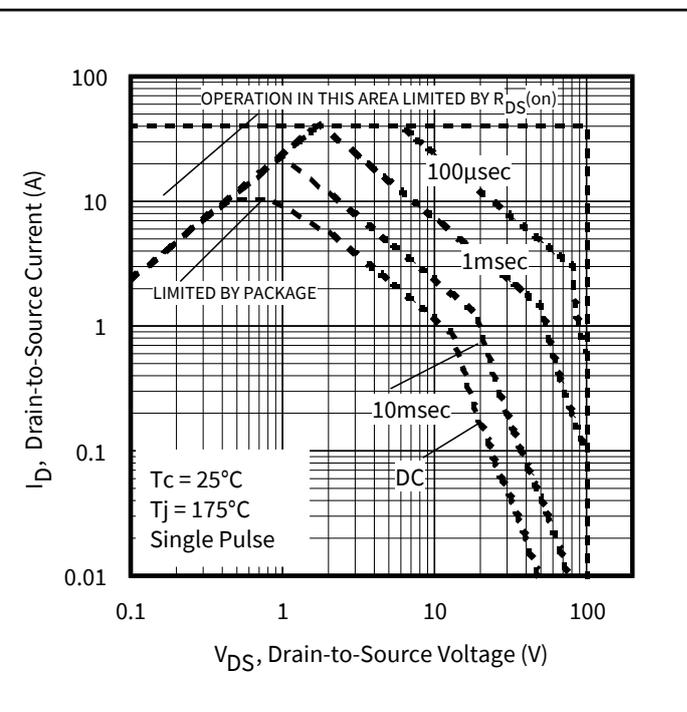


Figure 10 Maximum Safe Operating Area

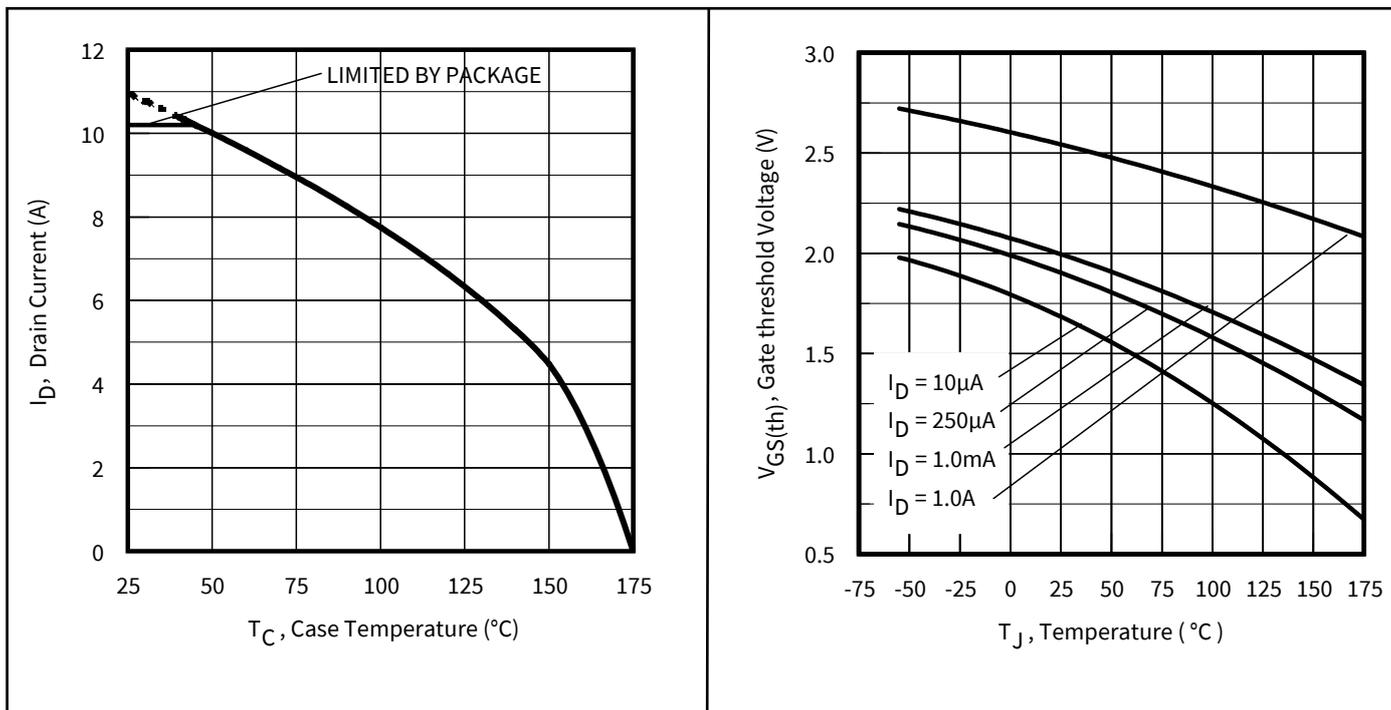


Figure 11 Maximum Drain Current vs. Case Temperature

Figure 12 Typical Threshold Voltage vs. Junction Temperature

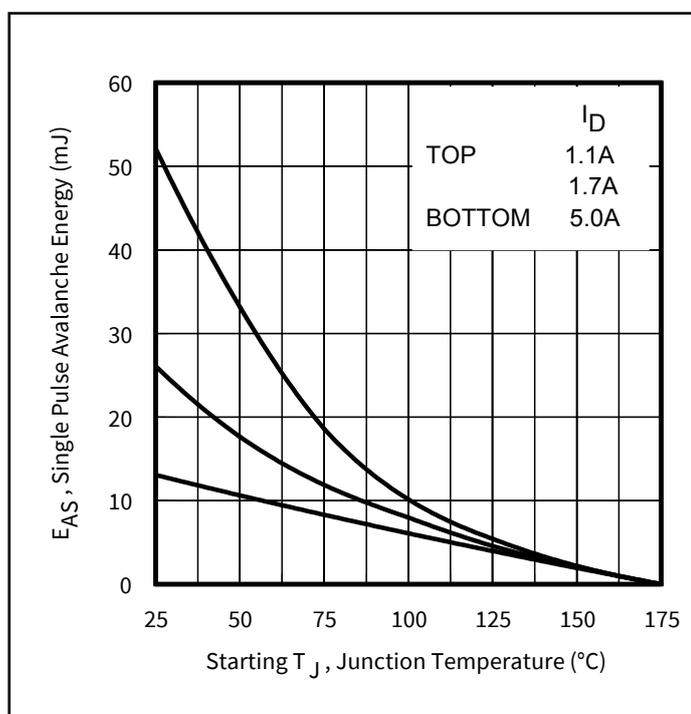


Figure 13 Maximum Avalanche Energy vs. Drain Current

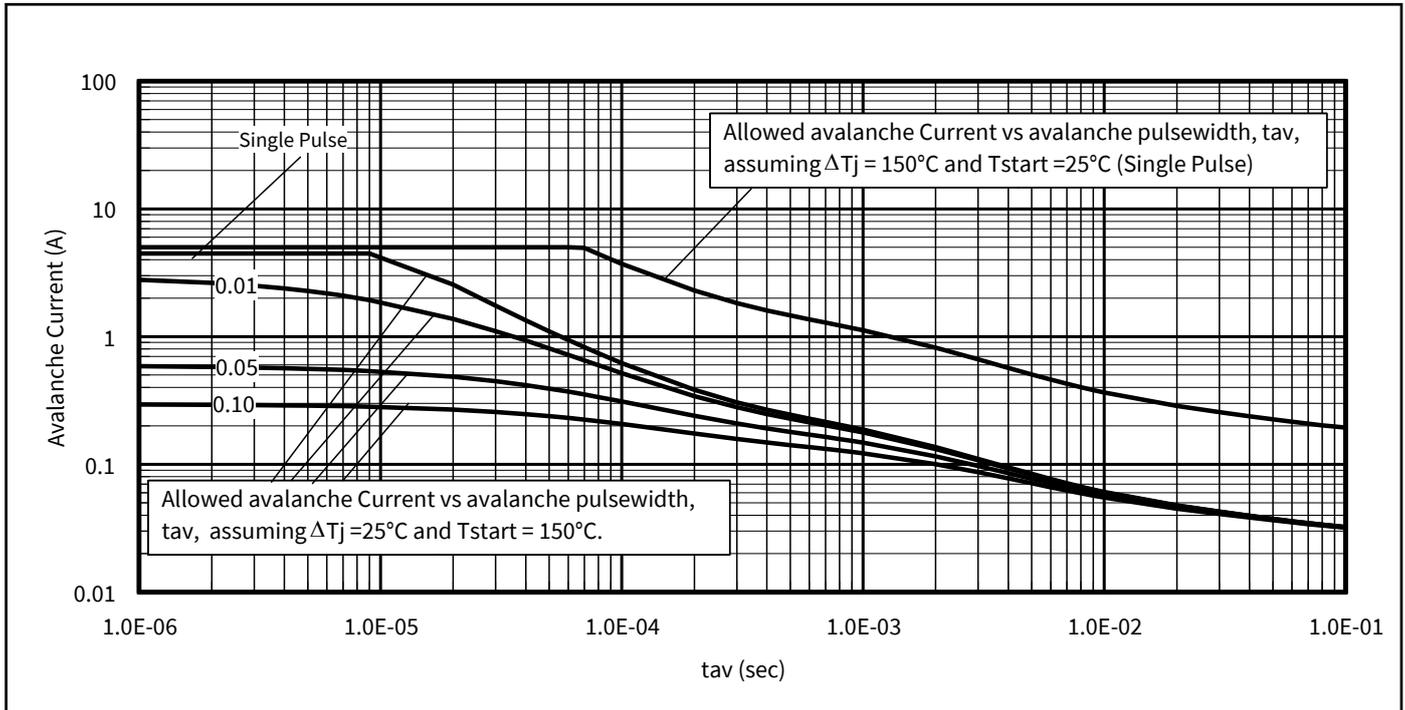


Figure 14 Typical Avalanche Current vs. Pulse Width

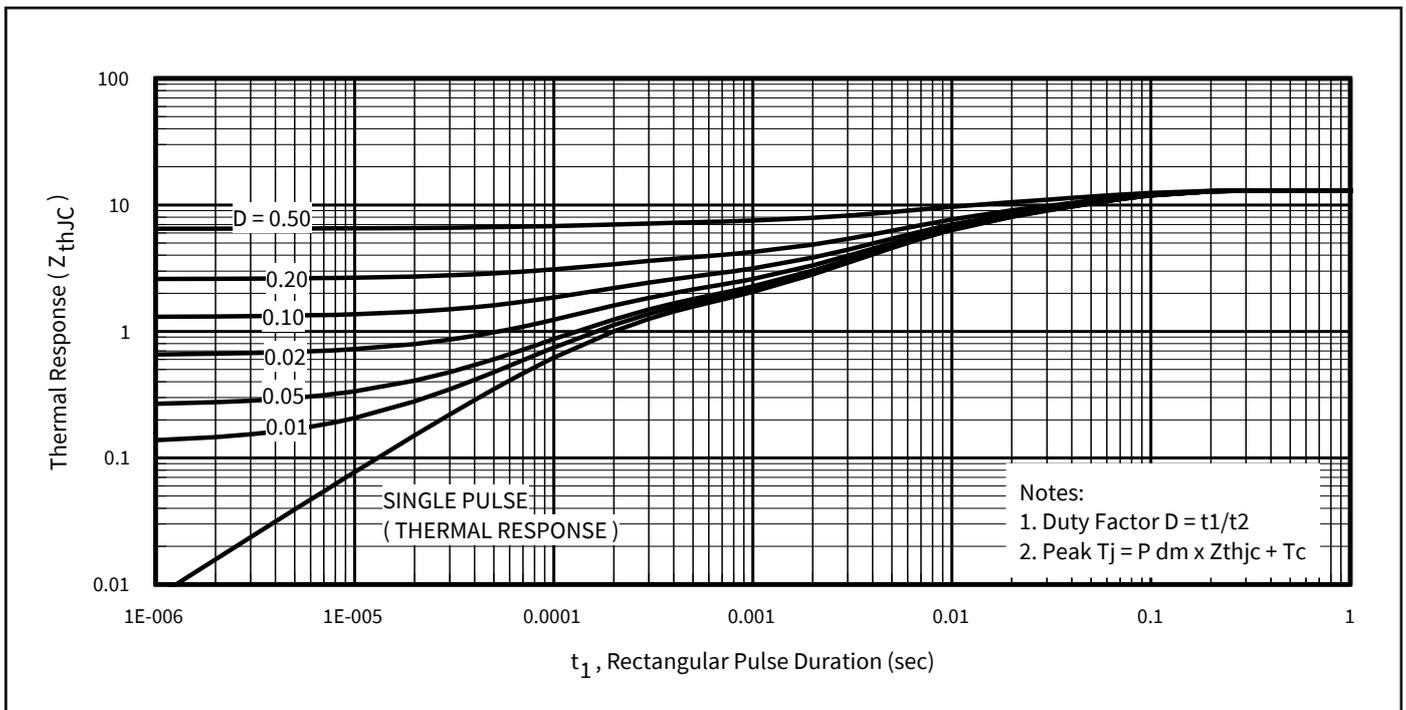


Figure 15 Maximum Effective Transient Thermal Impedance, Junction-to-Case

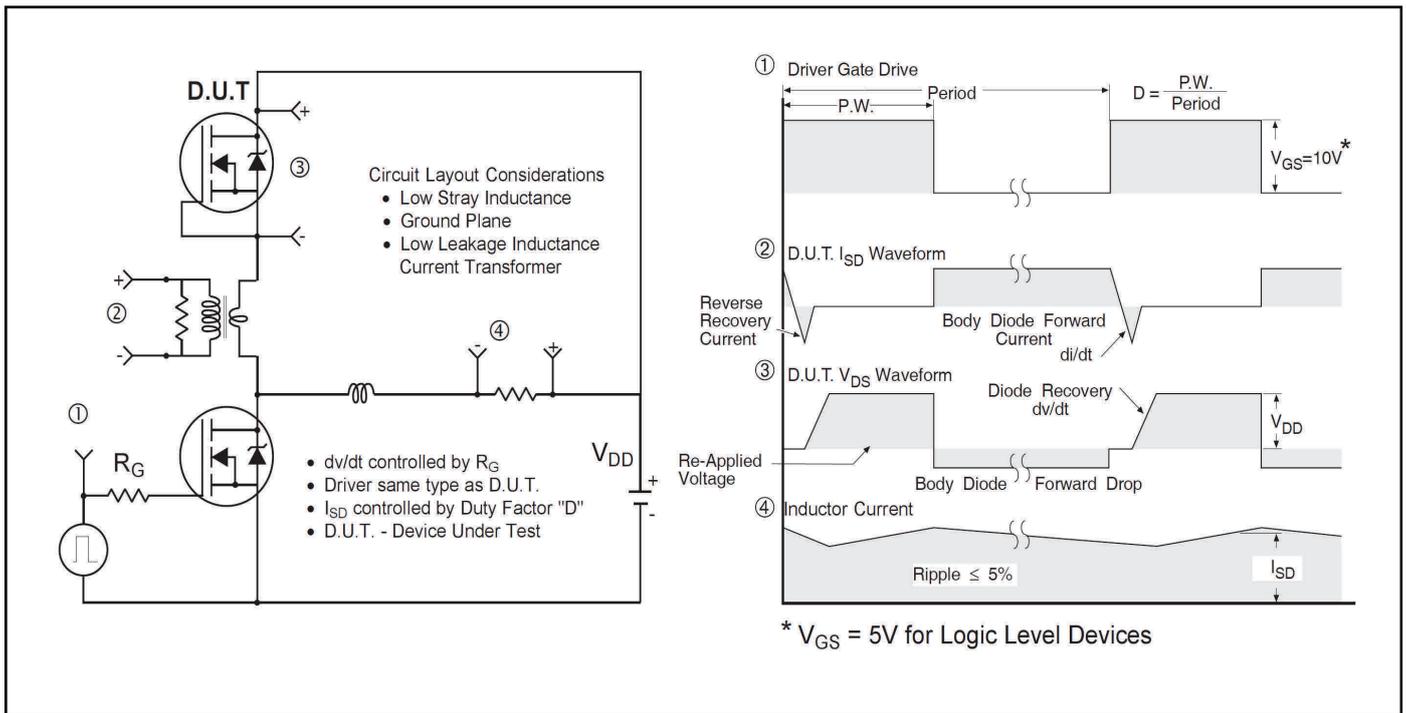


Figure 16 Peak Diode Recovery dv/dt Test Circuit for N-Channel Power MOSFETs

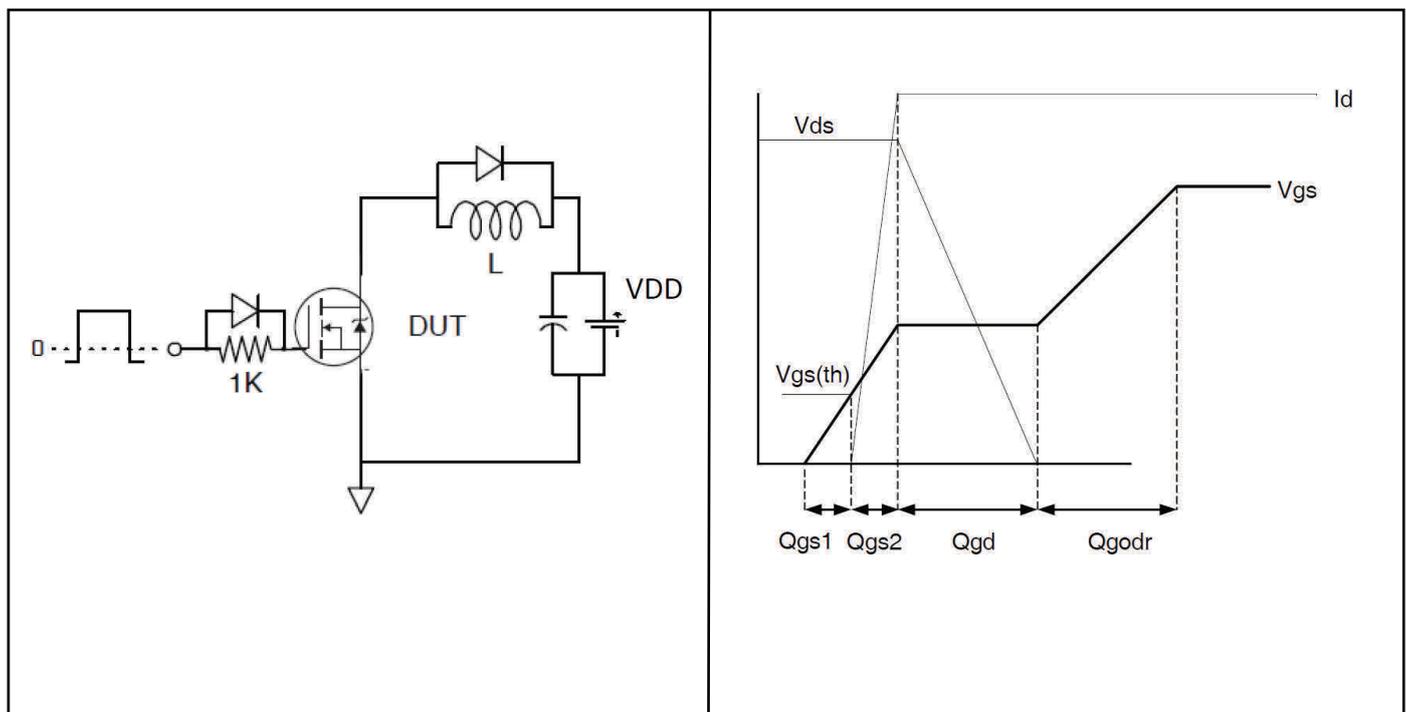


Figure 17a Gate Charge Test Circuit

Figure 17b Gate Charge Waveform

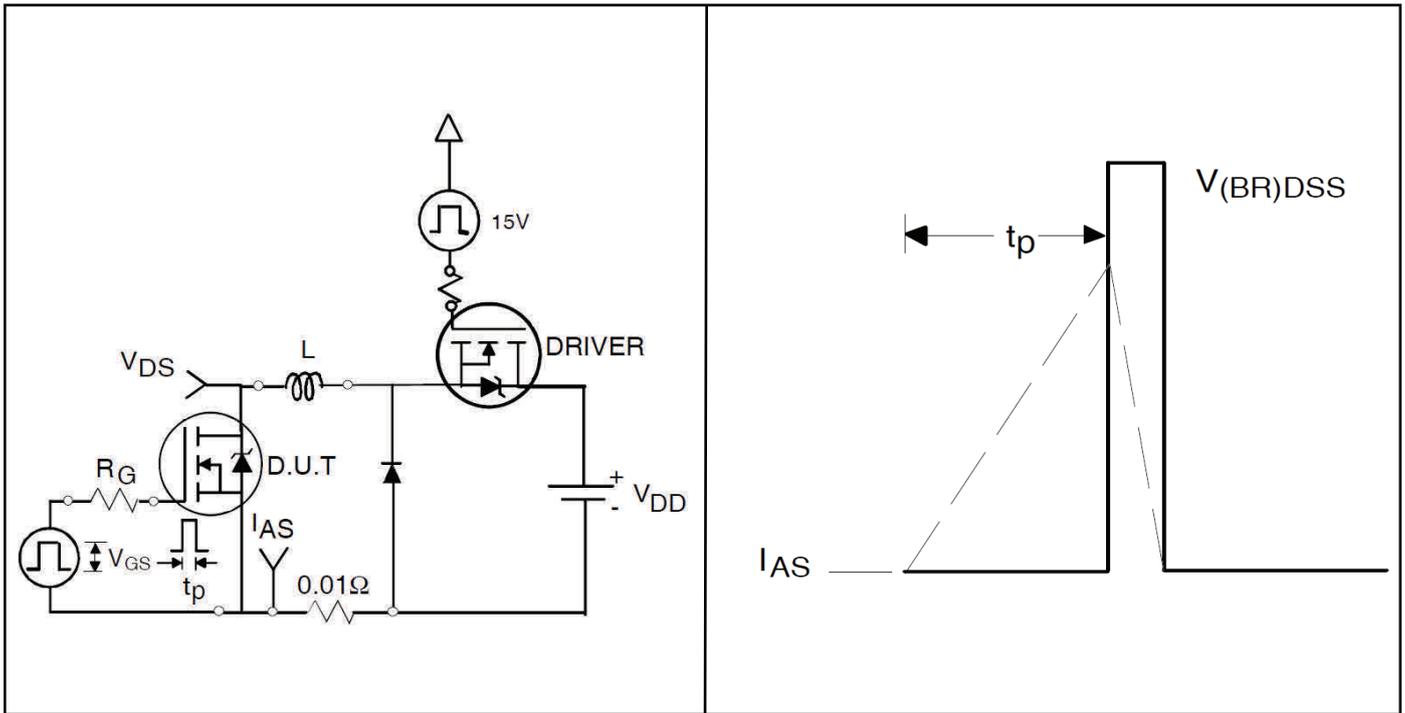


Figure 18a Unclamped Inductive Test Circuit

Figure 18b Unclamped Inductive Waveforms


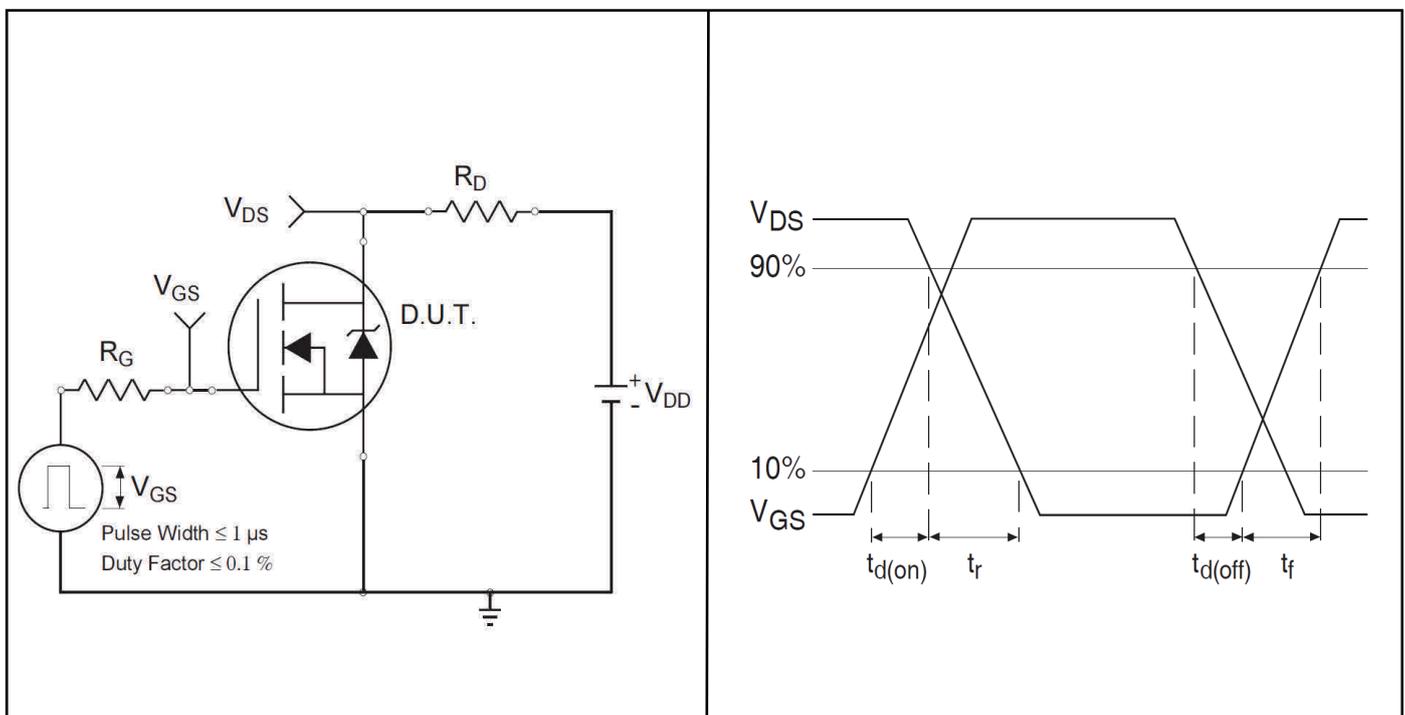


Figure 19a Switching Time Test Circuit

Figure 19b Switching Time Waveforms

## 5 Package Information

### PQFN 2 x 2 Outline Package Details

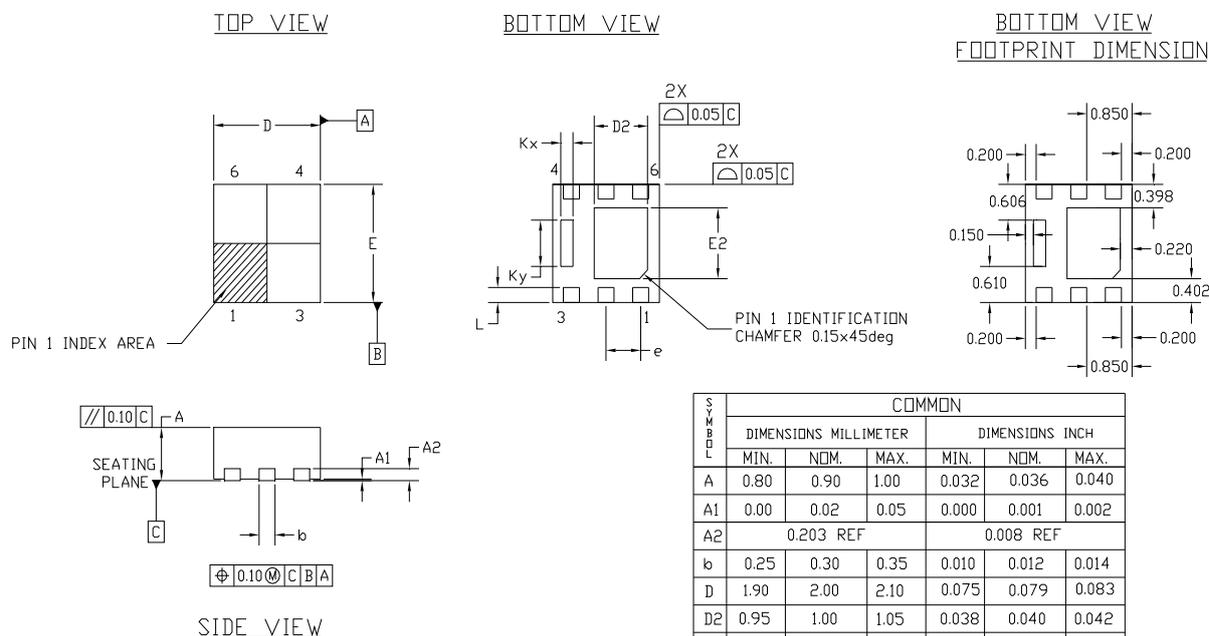

SYMBOL	COMMON					
	DIMENSIONS MILLIMETER			DIMENSIONS INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.80	0.90	1.00	0.032	0.036	0.040
A1	0.00	0.02	0.05	0.000	0.001	0.002
A2	0.203 REF			0.008 REF		
b	0.25	0.30	0.35	0.010	0.012	0.014
D	1.90	2.00	2.10	0.075	0.079	0.083
D2	0.95	1.00	1.05	0.038	0.040	0.042
E	1.90	2.00	2.10	0.075	0.079	0.083
E2	1.15	1.20	1.25	0.046	0.048	0.050
e	0.65 BSC			0.026 BSC		
L	0.20	0.25	0.30	0.008	0.010	0.012
Kx	0.23 REF			0.010 REF		
Ky	0.785 REF			0.031 REF		


NOTES :

1. DIMENSION AND TOLERANCING CONFORM TO ASME Y14.5M-1994.
2. CONTROLLING DIMENSIONS : MILLIMETER
3. DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 mm. FROM TERMINAL TIP.

For more information on board mounting, including footprint and stencil recommendation, please refer to application note AN-1136: <http://www.infineon.com/technical-info/appnotes/an-1136.pdf>

For more information on package inspection techniques, please refer to application note AN-1154: <http://www.infineon.com/technical-info/appnotes/an-1154.pdf>

### PQFN 2 x 2 Part Marking

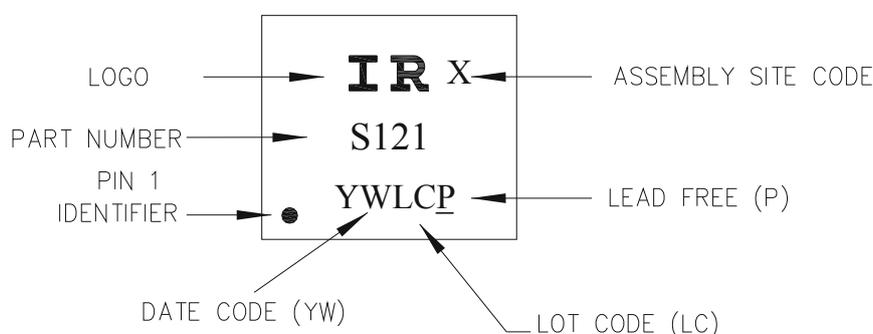

Note: For the most current drawing please refer to website at : [www.irf.com/package/](http://www.irf.com/package/)

# IRL100HS121

## Package Information

### PQFN 2 x 2 Tape and Reel


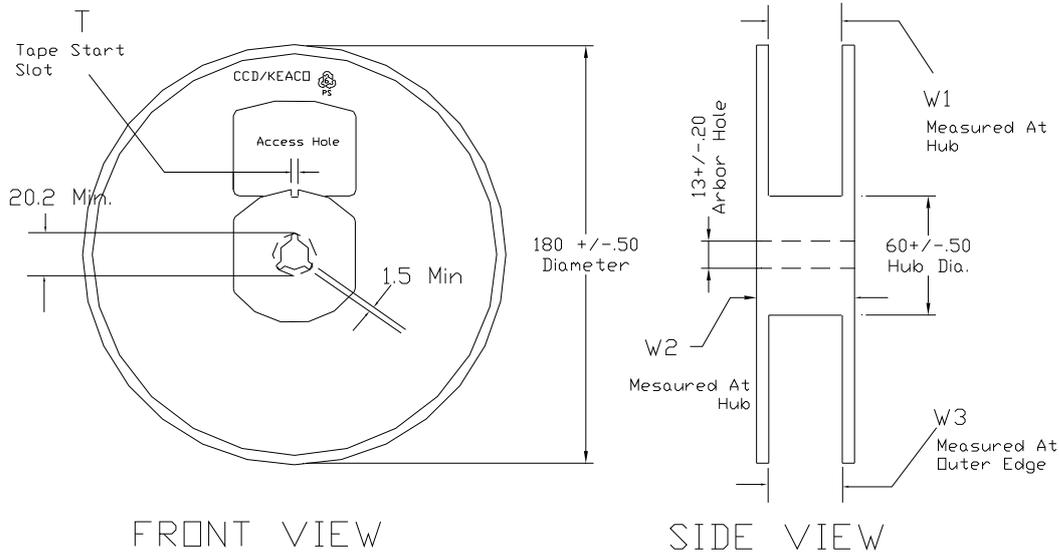


TABLE 1: REEL DETAILS

TAPE WIDTH	T	W1	W2	W3	PART NO
8 MM	3 ± 0.50	8.4 <sup>+1.5</sup> <sub>-0.0</sub>	14.4 Max	7.90 Min 10.9 Max	91586-1
12 MM	5 ± 0.50	12.4 <sup>+2.0</sup> <sub>-0.0</sub>	18.4 Max	11.9 Min 15.4 Max	91586-2

Note: Surface resistivity is  $\geq 1 \times 10^5$  but  $< 1 \times 10^{12}$  ohm/sq.

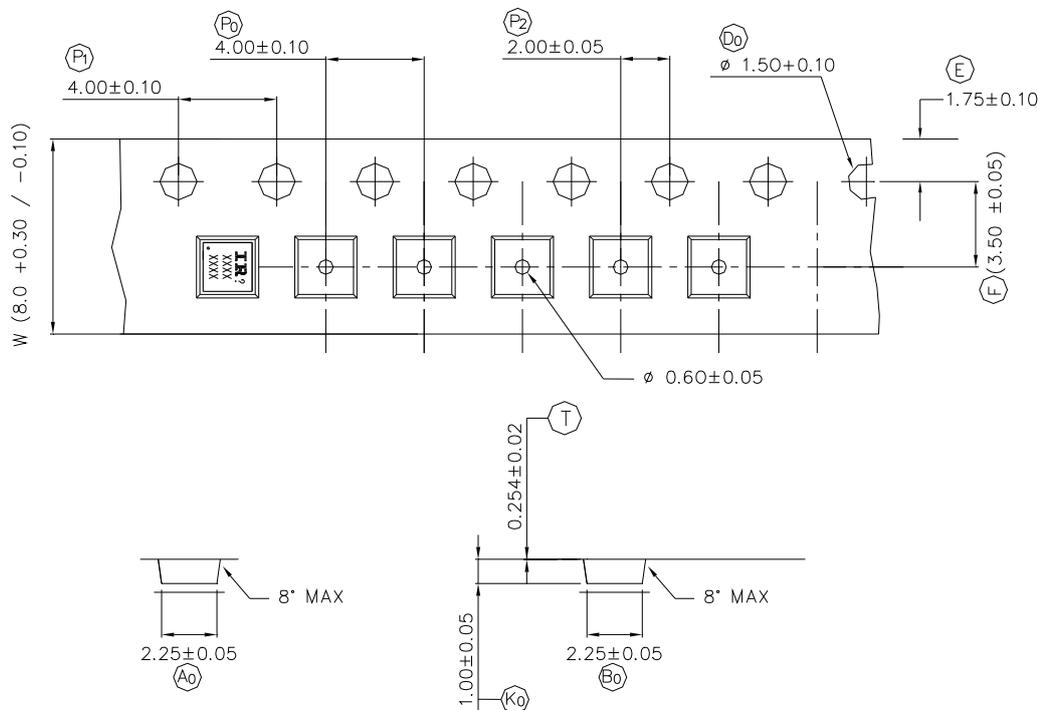

NOTE: The Surface Resistivity is  $10^4 - 10^8$  OHM/SQ

Note: For the most current drawing please refer to website at : [www.irf.com/package/](http://www.irf.com/package/)

## 6 Qualification Information

**Qualification Information**

<b>Qualification Level</b>	Industrial (per JEDEC JESD47F) †	
<b>Moisture Sensitivity Level</b>	PQFN 2 mm x 2 mm	MSL1 (per JEDEC J-STD-020D)†
<b>RoHS Compliant</b>	Yes	

† Applicable version of JEDEC standard at the time of product release.

## Revision History

### Major changes since the last revision

Page or Reference	Revision	Date	Description of changes
All pages	1.0	2015-12-03	<ul style="list-style-type: none"> <li>• First release data sheet as Provisional.</li> </ul>
All page	1.1	2016-09-12	<ul style="list-style-type: none"> <li>• Updated datasheet with revised package picture and outline drawings.</li> <li>• Datasheet is released as Provisional.</li> </ul>
All pages	1.2	2016-10-17	<ul style="list-style-type: none"> <li>• Added Switch Time test data.</li> <li>• Datasheet is released as Provisional.</li> </ul>
All pages	1.3	2017-08-21	<ul style="list-style-type: none"> <li>• Parts tested as Unique datasheet with revised current and all other tests</li> <li>• Updated ds in New Infineon Template</li> <li>• Added Link for Package Information—pages 12, 13</li> <li>• Added IR—PQFN 2x2 Package Picture—page 1</li> <li>• Datasheet completed as Approved Not Released.</li> <li>• Datasheet is w/o “Approved Not Released”</li> </ul>
All pages	2.0	2017-10-06	<ul style="list-style-type: none"> <li>• First release data sheet on Web.</li> </ul>
All pages	2.1	2018-05-08	<ul style="list-style-type: none"> <li>• Corrected typo on part marking from “100HS121” to “S121” to matched actual marking on the devices –page12</li> </ul>

## Trademarks of Infineon Technologies AG

$\mu$ HVIC™,  $\mu$ IPM™,  $\mu$ PFC™, AU-ConvertIR™, AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, CoolDP™, CoolGaN™, COOLiR™, CoolMOS™, CoolSET™, CoolSiC™, DAVE™, DI-POL™, DirectFET™, DrBlade™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPACK™, EconoPIM™, EiceDRIVER™, eupec™, FCOS™, GaNpowIR™, HEXFET™, HITFET™, HybridPACK™, iMOTION™, IRAM™, ISOFACE™, IsoPACK™, LEDrivIR™, LITIX™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OPTIGA™, OptiMOS™, ORIGA™, PowIRaudio™, PowIRstage™, PrimePACK™, PrimeSTACK™, PROFET™, PRO-SIL™, RASIC™, REAL3™, SmartLEWIS™, SOLID FLASH™, SPOC™, StrongIRFET™, SupIRBuck™, TEMPFET™, TRENCHSTOP™, TriCore™, UHVIC™, XHP™, XMC™

Trademarks updated November 2015

## Other Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

**Edition 2015-05-06**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2016 Infineon Technologies AG.  
All Rights Reserved.**

**Do you have a question about this document?**

**Email: [erratum@infineon.com](mailto:erratum@infineon.com)**

**Document reference**

## IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

## WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.