



# ESDA6V1-5SC6

ASD™

## TRANSIL™ ARRAY FOR ESD PROTECTION

### MAIN APPLICATIONS

Where transient overvoltage protection in ESD sensitive equipment is required, such as:

- Computers
- Printers
- Communication systems
- Cellular phone handsets and accessories
- Other telephone set
- Set top boxes

### FEATURES

- 5 Unidirectional Transil™ Functions
- Low leakage current:  $I_R$  max. < 1μA
- Breakdown voltage:  $V_{BR}$  = 6.1V min.

### DESCRIPTION


The ESDA6V1-5SC6 is a 5-bit wide monolithic suppressor which is designed to protect against ESD components connected to data and transmission lines.

### BENEFITS

- High integration
- Suitable for high density boards

### COMPLIES WITH THE FOLLOWING STANDARDS:


|                                                      |         | Test kV | Max. current |
|------------------------------------------------------|---------|---------|--------------|
| IEC61000-4-2 level 4                                 | Air     | 15      | -            |
|                                                      | Contact | 8       | 30A          |
| MIL STD 883C-Method 3015-7 class3 (Human Body Model) | Contact | > 4     | > 2.67A      |

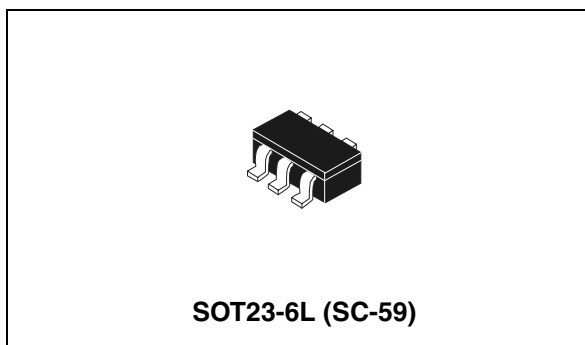


**Table 1: Order Code**

| Part Number  | Marking |
|--------------|---------|
| ESDA6V1-5SC6 | EC62    |

**Figure 1: Functional Diagram**

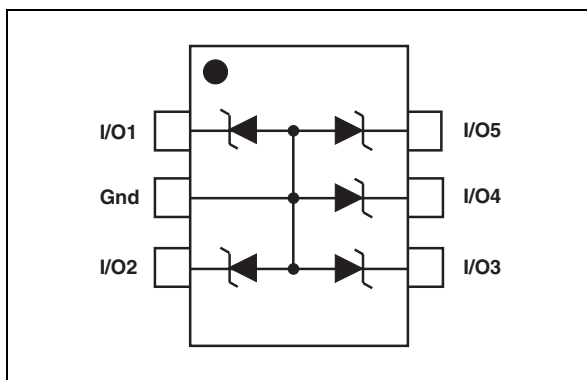

**Figure 2: ESD response to IEC61000-4-2 (air discharge 16kV, positive surge)**

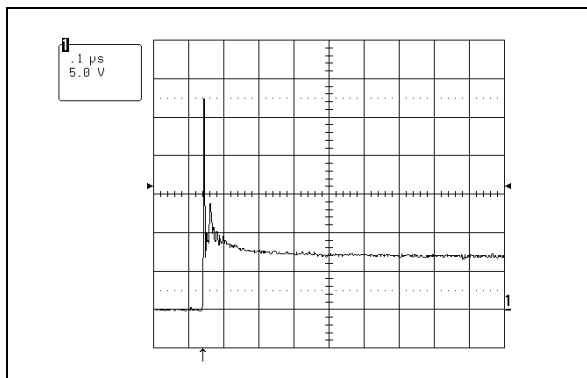

TM: ASD is a trademark of STMicroelectronics.


**Table 2: Absolute Maximum Ratings** ( $T_{amb} = 25^{\circ}\text{C}$ )

| Symbol    | Parameter                                                          |                                                                                              | Value          | Unit               |
|-----------|--------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------------|--------------------|
| $V_{PP}$  | ESD discharge                                                      | MIL STD 883E - Method 3015-7<br>IEC61000-4-2 air discharge<br>IEC61000-4-2 contact discharge | 25<br>20<br>15 | kV                 |
| $P_{PP}$  | Peak pulse power (8/20 $\mu\text{s}$ )                             |                                                                                              | 100            | W                  |
| $T_j$     | Junction temperature                                               |                                                                                              | 150            | $^{\circ}\text{C}$ |
| $T_{stg}$ | Storage temperature range                                          |                                                                                              | -55 to +150    | $^{\circ}\text{C}$ |
| $T_L$     | Maximum lead temperature for soldering during 10 s at 5mm for case |                                                                                              | 260            | $^{\circ}\text{C}$ |
| $T_{op}$  | Operating temperature range (note 1)                               |                                                                                              | -40 to +125    | $^{\circ}\text{C}$ |

**Note 1:** The evolution of the operating parameters versus temperature is given by curves and  $\alpha T$  parameter.

**Table 3: Electrical Characteristics** ( $T_{amb} = 25^{\circ}\text{C}$ )

| Symbol     | Parameter                       |
|------------|---------------------------------|
| $V_{RM}$   | Stand-off voltage               |
| $V_{BR}$   | Breakdown voltage               |
| $V_{CL}$   | Clamping voltage                |
| $I_{RM}$   | Leakage current                 |
| $I_{PP}$   | Peak pulse current              |
| $\alpha T$ | Voltage temperature coefficient |
| $V_F$      | Forward voltage drop            |
| $C$        | Capacitance                     |
| $R_d$      | Dynamic resistance              |

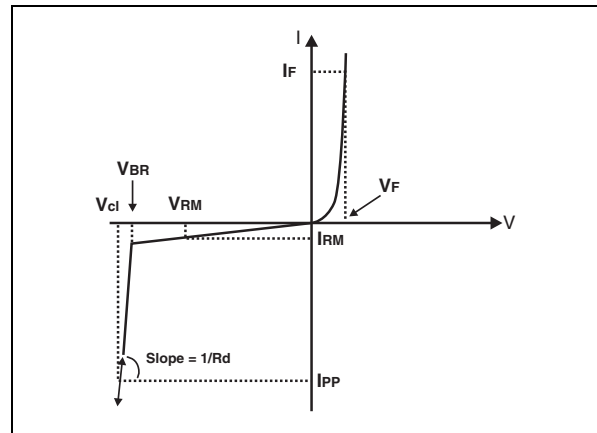


| Type         | $V_{BR}$ @ |      | $I_R$ | $I_{RM}$ @ $V_{RM}$ |   | $R_d$            | $\alpha T$                 | $C$ | $V_F$ @ $I_F$ |     |
|--------------|------------|------|-------|---------------------|---|------------------|----------------------------|-----|---------------|-----|
|              | min.       | max. |       | max.                |   |                  |                            |     | max.          |     |
|              | V          | V    | mA    | $\mu\text{A}$       | V | $\text{m}\Omega$ | $10^{-4}/^{\circ}\text{C}$ | pF  | V             | mA  |
| ESDA6V1-5SC6 | 6.1        | 7.2  | 1     | 1                   | 3 | 590              | 6                          | 50  | 1.25          | 200 |

**Note 2:** Square pulse,  $I_{PP} = 15\text{A}$ ,  $t_p = 2.5\mu\text{s}$ .

**Note 3:**  $\Delta V_{BR} = \alpha T * (T_{amb} - 25^{\circ}\text{C}) * V_{BR}(25^{\circ}\text{C})$ .

**Figure 3: Peak power dissipation versus initial junction temperature**

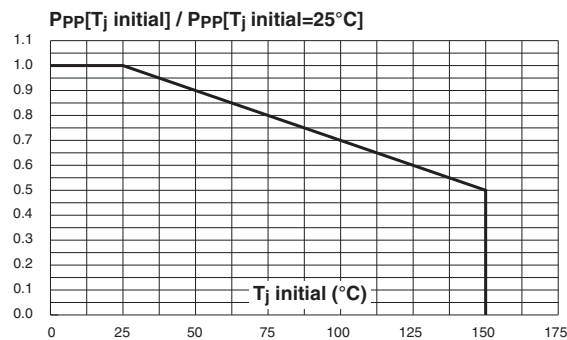

**Figure 4: Peak power versus exponential pulse duration ( $T_j$  initial =  $25^{\circ}\text{C}$ )**

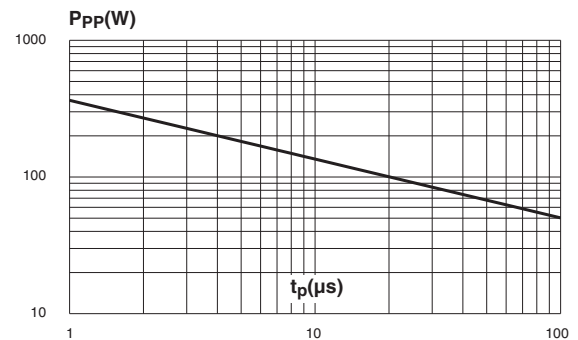


Figure 5: Clamping voltage versus peak pulse current ( $T_j$  initial = 25 °C).  
Rectangular waveform ( $t_p = 2.5 \mu s$ )

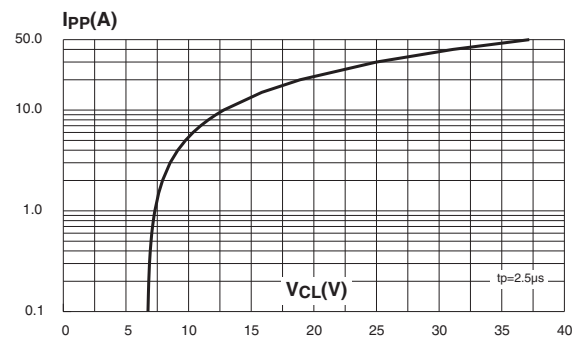


Figure 6: Capacitance versus reverse applied voltage (typical values)

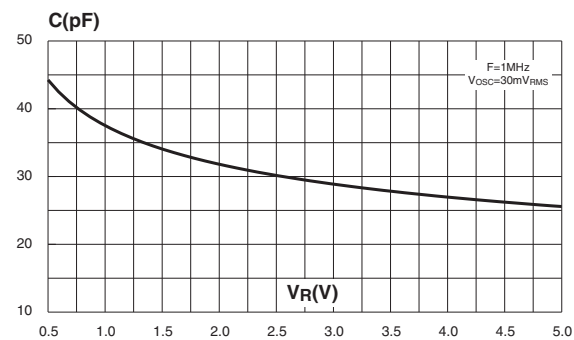


Figure 7: Relative variation of leakage current versus junction temperature (typical values)

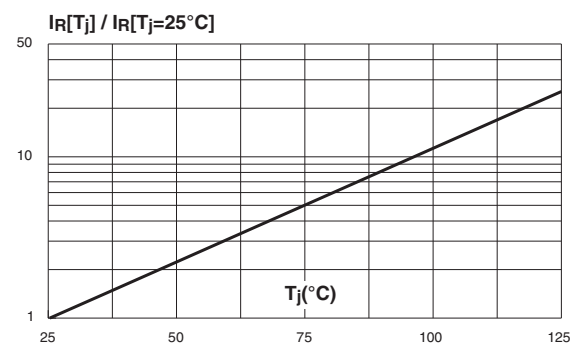


Figure 8: Peak forward voltage drop versus peak forward current (typical values)

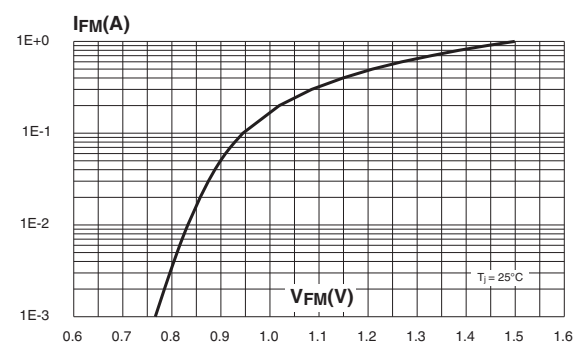


Figure 9: Ordering information scheme

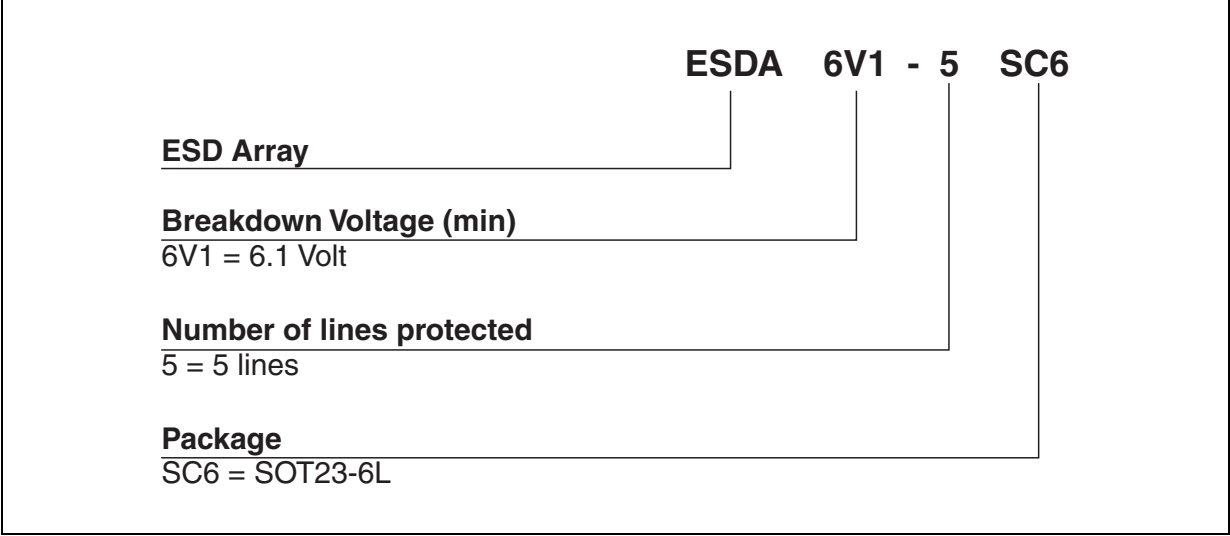


Figure 10: SOT23-6L Package Mechanical Data

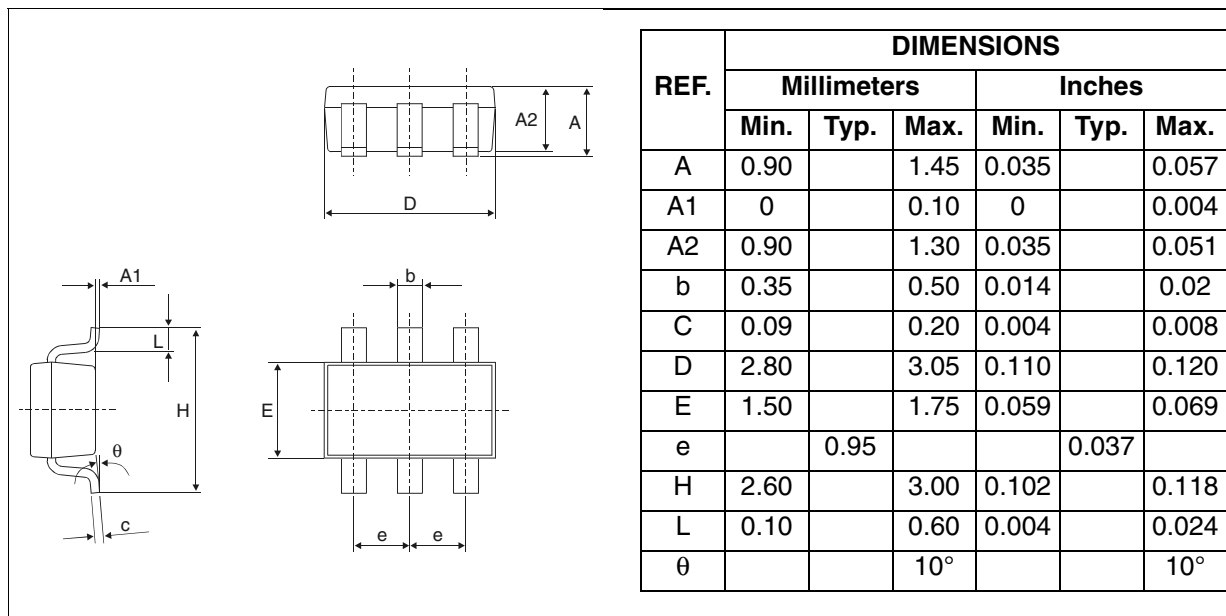


Figure 11: Foot Print Dimensions (in millimeters)

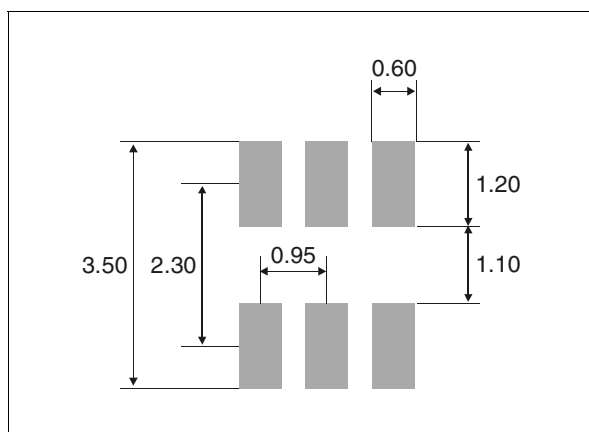


Table 4: Ordering Information

| Part Number  | Marking | Package  | Weight  | Base qty | Delivery mode |
|--------------|---------|----------|---------|----------|---------------|
| ESDA6V1-5SC6 | EC62    | SOT23-6L | 16.7 mg | 3000     | Tape & reel   |

Table 5: Revision History

| Date       | Revision | Description of Changes                                                                                                       |
|------------|----------|------------------------------------------------------------------------------------------------------------------------------|
| Feb-2002   | 2B       | Last update.                                                                                                                 |
| 4-Nov-2004 | 3        | SOT23-6L package dimensions change for reference "D" from 3.0 millimeters (0.118 inches) to 3.05 millimeters (0.120 inches). |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.  
All other names are the property of their respective owners

© 2004 STMicroelectronics - All rights reserved

**STMicroelectronics group of companies**

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -  
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America  
**[www.st.com](http://www.st.com)**





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.