

# Distinctive Characteristics

Unique, off-center actuator allows high density setup and easy actuation while avoiding accidental operation in compact environments.

Side-by-side, block mounting can be achieved by use of bracket AT546 on straight PC mounting types.

Off-Momentary On Circuit.


Black, white, and red snap-on caps available.

Extremely thin size allows high density PCB mounting and makes these switches ideal for handheld equipment.


Award-winning STC contact mechanism with benefits unavailable in conventional mechanisms: smoother, positive detent actuation, increased contact stability and unparalleled logic-level reliability. (Additional STC details in Terms & Acronyms; see Supplement section.)

Molded-in, epoxy sealed terminals lock out flux and other contaminants.

.100" x .100" (2.54mm x 2.54mm) terminal spacing conforms to standard PC board grid spacing for straight and angle mounting.

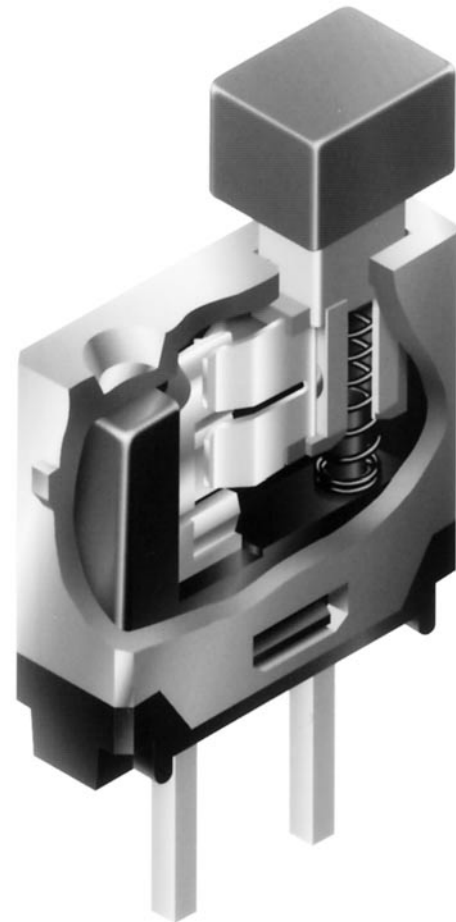

Actual Size

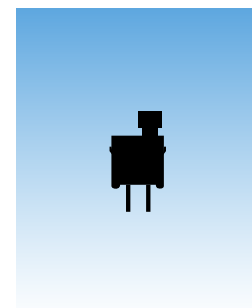

# General Specifications

## Electrical Capacity (Resistive Load)

**Logic Level:** 0.4VA maximum @ 28V AC/DC maximum  
 (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)  
 Note: Find additional explanation of operating range in Supplement section.

## Other Ratings

**Contact Resistance:** 80 milliohms maximum  
**Insulation Resistance:** 500 megohms minimum @ 500V DC  
**Dielectric Strength:** 500V AC minimum for 1 minute minimum  
**Mechanical Life:** 50,000 operations minimum  
**Electrical Life:** 50,000 operations minimum  
**Nominal Operating Force:** 1.0N  
**Travel:** Pretravel .020" (0.5mm); Overtravel .023 (0.6mm); Total Travel .043" (1.1mm)

## Materials & Finishes

**Actuator:** Glass fiber reinforced polyamide (UL94V-0)  
**Case:** Glass fiber reinforced polyamide (UL94V-0)  
**Movable Contacts:** Phosphor bronze with gold plating  
**Stationary Contacts:** Brass with gold plating  
**Base:** Glass fiber reinforced polyamide (UL94V-0)  
**Mounting Bracket:** Phosphor bronze with tin plating  
**Terminals:** Brass with gold plating

## Environmental Data

**Operating Temperature Range:** -25°C through +70°C (-13°F through +158°F)  
**Humidity:** 90 ~ 95% humidity for 240 hours @ 40°C (104°F)  
**Vibration:** 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours  
**Shock:** 50G (490m/s<sup>2</sup>) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

## PCB Processing

**Soldering:** Wave Soldering recommended. See Profile B in Supplement section.  
 Manual Soldering: 4 seconds maximum @ 390°C maximum.  
**Cleaning:** These devices are not process sealed. Hand clean locally using alcohol based solution. See Cleaning Specifications in Supplement section.

## Standards & Certifications

**Flammability Standards:** UL94V-0 actuator, case, & base  
**UL Recognition or CSA Certification:** The GB2 Series pushbuttons have not been tested for UL recognition or CSA certification. These switches are designed for use in a low-voltage, low-current, logic-level circuit. When used as intended in a logic-level circuit, the results do not produce hazardous energy.

### TYPICAL SWITCH ORDERING EXAMPLE

**GB2**

**1**

| POLE |      |
|------|------|
| 1    | SPST |

**5**

| CIRCUIT         |     |      |
|-----------------|-----|------|
| 5               | OFF | (ON) |
| ( ) = Momentary |     |      |

**A**

| PLUNGER |          |
|---------|----------|
| A       | Standard |

**B**

| PC TERMINALS |                        |
|--------------|------------------------|
| P            | Straight               |
| B            | Straight with Bracket  |
| H            | Right Angle 1 Switch   |
| 2H           | Right Angle 2 Switches |

| CAP COLORS                                       |       |        |
|--|-------|--------|
| With P, B, or H Terminals for Single Switches    |       |        |
| A  | Black |        |
| B  | White |        |
| C  | Red   |        |
| With Terminal Code 2H for 2 Right Angle Switches |       |        |
| Upper  |       | *Lower |
| A  | Black | A      |
| B  | White | B      |
| C  | Red   | C      |
| * Nearest to PC Board                            |       |        |

**DESCRIPTION FOR TYPICAL ORDERING EXAMPLE**

**GB215AB**



### POLE & CIRCUIT


| Pole | Model | Plunger Position<br>( ) = Momentary |      | Connected Terminals |                | Throw & Schematics   |
|------|-------|-------------------------------------|------|---------------------|----------------|--|
|      |       | Normal                              | Down | Normal              | Down           |  |
| SP   | GB215 | OFF                                 | (ON) | OPEN                | 1-2<br>1-2 3-4 | Note: Terminal numbers are not actually on the switch.<br> |

### TYPICAL SWITCH DIMENSIONS




#### Straight PC



GB215AP







#### Single Pole







### TYPICAL SWITCH DIMENSIONS

#### Straight PC with Bracket

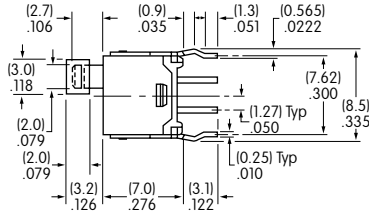

GB215AB





#### Right Angle PC



GB215AH

#### Single Pole with 1 Switch

#### Right Angle PC



GB215A2H

#### Single Pole with 2 Switches

### SNAP-ON CAP & MOUNTING BRACKET

**A** AT4137 Rectangular Snap-on Cap  
Black


**B** AT4137 Rectangular Snap-on Cap  
White

**C** AT4137 Rectangular Snap-on Cap  
Red

Material: PBT  
Finish: Glossy




Actual Size



**AT546**  
Mounting Bracket  
for Block Mounting

Material:  
Phosphor Bronze  
with Tin Plating





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.