


DESCRIPTION

This TRANSIENT VOLTAGE SUPPRESSOR (TVS) array is packaged in an SO-8 configuration giving protection to 4 unidirectional or bi-directional data or interface lines. It is designed for use in applications where protection is required at the board level from voltage transients caused by electrostatic discharge (ESD) as defined in IEC 61000-4-2, electrical fast transients (EFT) per IEC 61000-4-4 and effects of secondary lightning. These TVS arrays have peak pulse power ratings of 300 watts (SMDA) and 500 watts (SMDB) for an 8/20 µsec pulse. They are suitable for protection of sensitive circuitry consisting of TTL, CMOS, DRAM's, SRAM's, HCMOS, HSIC and low-voltage interfaces from 3.3 volts to 24 volts

IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

APPEARANCE



FEATURES

- Protects 3.0/3.3 volt up to 24 volt components
- Protects 4 unidirectional or bidirectional lines
- Provides electrically-isolated protection
- RoHS Compliant devices available by adding "e3" suffix

PACKAGING

- Tape & Reel per EIA Standard 481
- 13 inch reel; 2,500 pieces (STANDARD)
- Carrier tubes; 95 pcs (OPTIONAL)

MAXIMUM RATINGS

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- SMDA Peak Pulse Power: 300 watts (Fig. 1 and 2)
- SMDB Peak Pulse Power: 500 watts (Fig. 1 and 2)
- Pulse Repetition Rate: <.01%

MECHANICAL

- CASE: Void-free transfer molded thermosetting epoxy compound meeting UL 94V-0 flammability classification
- TERMINALS: Tin-Lead or RoHS Compliant annealed matte-Tin plating solderable per MIL-STD-750 method 2026
- WEIGHT: 0.066 grams (approximate)
- MARKING: MSC Logo, device marking code*, date code
- Pin #1 defined by dot on top of package

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless otherwise specified

| PART NUMBER | DEVICE MARKING CODE * | STAND OFF VOLTAGE | BREAKDOWN VOLTAGE | CLAMPING VOLTAGE | CLAMPING VOLTAGE | STANDBY (LEAKAGE) CURRENT | CAPACITANCE | TEMPERATURE COEFFICIENT |
|-------------|-----------------------|-------------------|-------------------|------------------|------------------|---------------------------|-------------|-------------------------|
| | | V _{WM} | V _{BR} | V _C | V _C | I _D | f=1 MHz | of V _{BR} |
| | | VOLTS | VOLTS | VOLTS | VOLTS | @V _{WM} | C | α _{VBR} |
| | | MAX | MIN | MAX | MAX | MAX | TYP | TYP |
| SMDA03 | SDK | 3.3 | 4 | 7 | 9 | 200 | 600 | -3 |
| SMDA03C | SDL | 3.3 | 4 | 7 | 9 | 400 | 300 | -5 |
| SMDB03 | PDK | 3.3 | 4 | 7 | 9 | 200 | 600 | -3 |
| SMDB03C | PDL | 3.3 | 4 | 7 | 9 | 400 | 300 | -5 |
| SMDA05 | SDA | 5.0 | 6 | 9.8 | 11 | 20 | 400 | 3 |
| SMDA05C | SDB | 5.0 | 6 | 9.8 | 11 | 40 | 200 | 1 |
| SMDB05 | PDA | 5.0 | 6 | 9.8 | 11 | 20 | 400 | 3 |
| SMDB05C | PDB | 5.0 | 6 | 9.8 | 11 | 40 | 200 | 1 |
| SMDA12 | SDC | 12.0 | 13.3 | 19 | 24 | 1 | 185 | 10 |
| SMDA12C | SDD | 12.0 | 13.3 | 19 | 24 | 1 | 95 | 8 |
| SMDB12 | PDC | 12.0 | 13.3 | 19 | 24 | 1 | 185 | 10 |
| SMDB12C | PDD | 12.0 | 13.3 | 19 | 24 | 1 | 95 | 8 |
| SMDA15 | SDE | 15.0 | 16.7 | 24 | 30 | 1 | 140 | 13 |
| SMDA15C | SDF | 15.0 | 16.7 | 24 | 30 | 1 | 70 | 11 |
| SMDB15 | PDE | 15.0 | 16.7 | 24 | 30 | 1 | 140 | 13 |
| SMDB15C | PDF | 15.0 | 16.7 | 24 | 30 | 1 | 70 | 11 |
| SMDA24 | SDG | 24.0 | 26.7 | 43 | 55 | 1 | 90 | 30 |
| SMDA24C | SDH | 24.0 | 26.7 | 43 | 55 | 1 | 45 | 28 |
| SMDB24 | PDG | 24.0 | 26.7 | 43 | 55 | 1 | 90 | 30 |
| SMDB24C | PDH | 24.0 | 26.7 | 43 | 55 | 1 | 45 | 28 |

Note: Transient Voltage Suppressor (TVS) product is normally selected based on its stand off voltage V_{WM}. Product selected voltage should be equal to or greater than the continuous peak operating voltage of the circuit to be protected. Part numbers with a C suffix are bi-directional devices.

* Device marking has an e3 suffix added for the RoHS Compliant options, e.g. SDKe3, SDLe3, SDCe3, SDEe3, PDHe3, etc.

SYMBOLS & DEFINITIONS

| Symbol | Definition |
|----------|---|
| V_{WM} | Stand Off Voltage: Maximum dc voltage that can be applied over the operating temperature range. V_{WM} must be selected to be equal or be greater than the operating voltage of the line to be protected. |
| V_{BR} | Minimum Breakdown Voltage: Minimum voltage the device will exhibit at a specified current |
| V_C | Clamping Voltage: Maximum clamping voltage across the TVS device when subjected to a given current at a pulse time of 20 μ s. |
| I_D | Standby Current: Leakage current at V_{WM} . |
| C | Capacitance: Capacitance of the TVS as defined @ 0 volts at a frequency of 1 MHz and stated in picofarads. |

GRAPHS

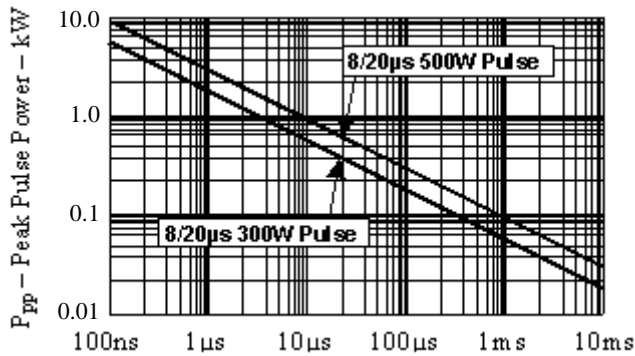


Figure 1
Peak Pulse Power vs Pulse Time


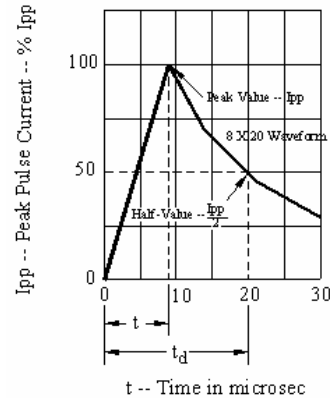



Figure 2
Pulse Wave Form

OUTLINE AND SCHEMATIC




| DIM | INCHES | | MILLIMETERS | |
|-----|-----------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A | 0.188 | 0.197 | 4.77 | 5.00 |
| B | 0.150 | 0.158 | 3.381 | 4.01 |
| C | 0.053 | 0.069 | 1.35 | 1.75 |
| D | 0.011 | 0.021 | 0.28 | 0.53 |
| F | 0.016 | 0.050 | 0.41 | 1.27 |
| G | 0.050 BSC | | 1.27 BSC | |
| J | 0.006 | 0.010 | 0.15 | 0.25 |
| K | 0.005 | 0.008 | 0.10 | 0.20 |
| L | 0.189 | 0.206 | 4.80 | 5.23 |
| P | 0.228 | 0.244 | 5.79 | 6.19 |

OUTLINE

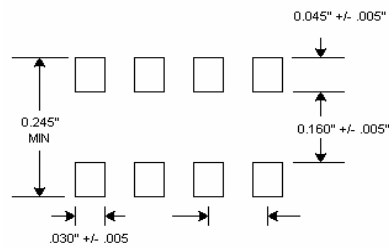

PAD LAYOUT

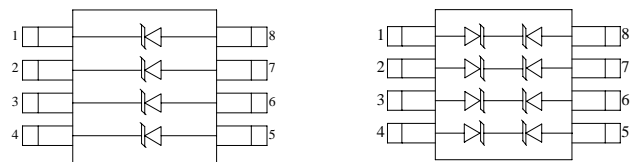

Unidirectional

Bidirectional

SCHEMATIC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Microchip:

[SMDA05/TR7](#) [SMDA24C/TR7](#) [SMDA05-6E3/TR7](#) [SMDA15-6E3/TR7](#) [SMDA24E3/TR7](#) [SMDA05CE3/TR7](#)
[SMDA15CE3/TR7](#) [SMDA03C-8/TR13](#) [SMDB05Ce3/TR13](#) [SMDB12Ce3/TR7](#) [SMDA03C/TR7](#) [SMDA05/TR13](#)
[SMDB12C/TR13](#) [SMDA15/TR13](#) [SMDB12C/TR7](#) [SMDB05/TR7](#) [SMDB05C/TR13](#) [SMDB24/TR7](#) [SMDB12/TR13](#)
[SMDA15/TR7](#) [SMDA12/TR13](#) [SMDA12C-8/TR13](#) [SMDA03Ce3/TR7](#) [SMDA24/TR7](#) [SMDB03C/TR13](#) [SMDA15C-](#)
[8/TR13](#) [SMDB24C/TR7](#) [SMDA03e3/TR7](#) [SMDB15/TR13](#) [SMDA15C/TR13](#) [SMDB15C/TR7](#) [SMDA15Ce3/TR13](#)
[SMDB24/TR13](#) [SMDB24C/TR13](#) [SMDA03e3/TR13](#) [SMDA15C/TR7](#) [SMDB15C/TR13](#) [SMDA24C/TR13](#) [SMDB03/TR7](#)
[SMDA15C-5/TR13](#) [SMDA15-6/TR13](#) [SMDA12C-4-2/TR7](#) [SMDA03C-4-2/TR7](#) [SMDA05C-8e3/TR7](#) [SMDA24C-](#)
[8e3/TR7](#) [SMDA15-6/TR7](#) [SMDA12-6/TR7](#) [SMDA12C-7e3/TR13](#) [SMDA24-6e3/TR13](#) [SMDB24e3/TR7](#)
[SMDB03e3/TR13](#) [SMDA12C-7/TR7](#) [SMDA24C-7/TR7](#) [SMDA12Ce3/TR13](#) [SMDA12-6/TR13](#) [SMDA05C-4-2e3/TR13](#)
[SMDA24C-7/TR13](#) [SMDA03C-4e3/TR7](#) [SMDA03C-5e3/TR7](#) [SMDA03C-7e3/TR7](#) [SMDA24Ce3/TR13](#) [SMDA12C-](#)
[4e3/TR7](#) [SMDA12C-7e3/TR7](#) [SMDA12C-5e3/TR7](#) [SMDA15-6e3/TR13](#) [SMDA24C-4-2e3/TR7](#) [SMDA15C-4-2e3/TR7](#)
[SMDA12C-4/TR7](#) [SMDA12C-7/TR13](#) [SMDA03/TR7](#) [SMDA15C-4-2/TR7](#) [SMDA24C-4/TR7](#) [SMDA24/TR13](#)
[SMDA12C-5e3/TR13](#) [SMDB03e3/TR7](#) [SMDB05e3/TR7](#) [SMDB05e3/TR13](#) [SMDA03Ce3/TR13](#) [SMDB24Ce3/TR7](#)
[SMDB15e3/TR7](#) [SMDA12C-4e3/TR13](#) [SMDA05C-7/TR13](#) [SMDB12e3/TR7](#) [SMDA24-6/TR7](#) [SMDA03C-8/TR7](#)
[SMDA05Ce3/TR13](#) [SMDA03C-5/TR13](#) [SMDA24C-4-2/TR7](#) [SMDA05C-4-2e3/TR7](#) [SMDA03C-4-2e3/TR13](#)
[SMDB24e3/TR13](#) [SMDA15C-4/TR7](#) [SMDA24e3/TR13](#) [SMDB05C/TR7](#) [SMDB03Ce3/TR7](#) [SMDA03C-5e3/TR13](#)
[SMDB15Ce3/TR7](#) [SMDA15C-7/TR7](#) [SMDA03C-7/TR13](#) [SMDA24C-4/TR13](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.