
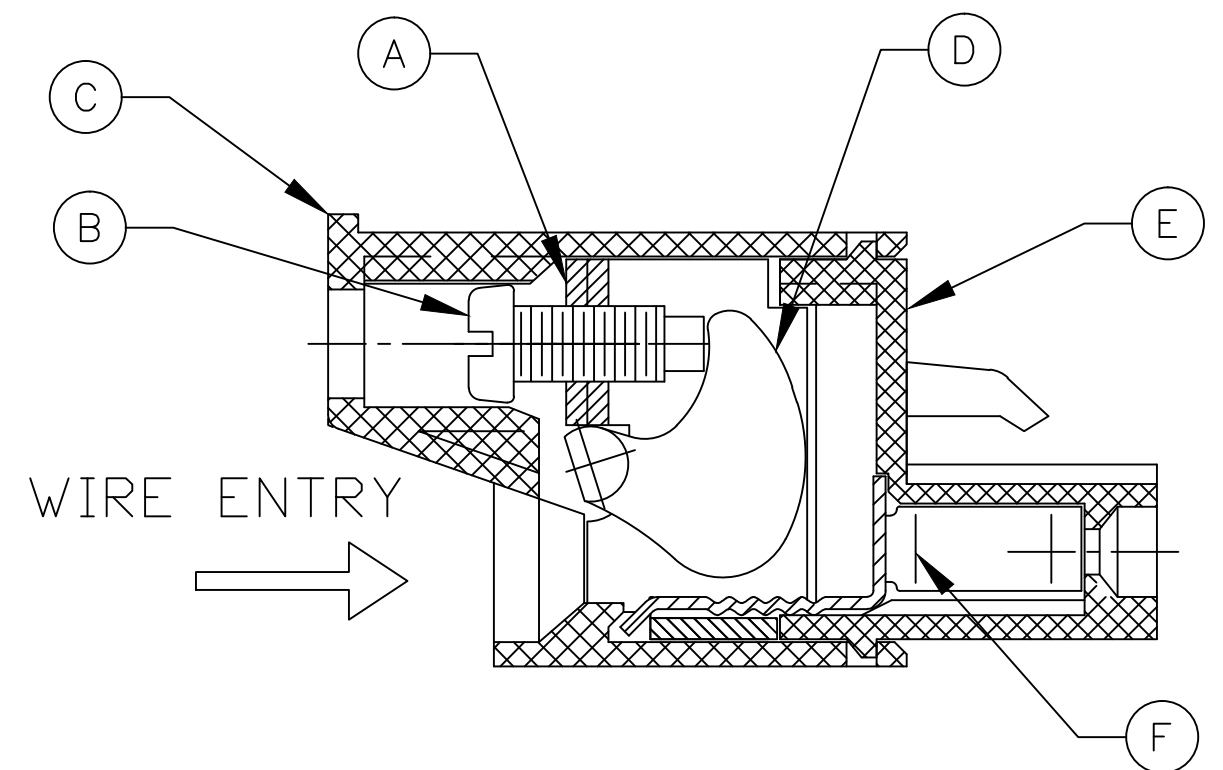
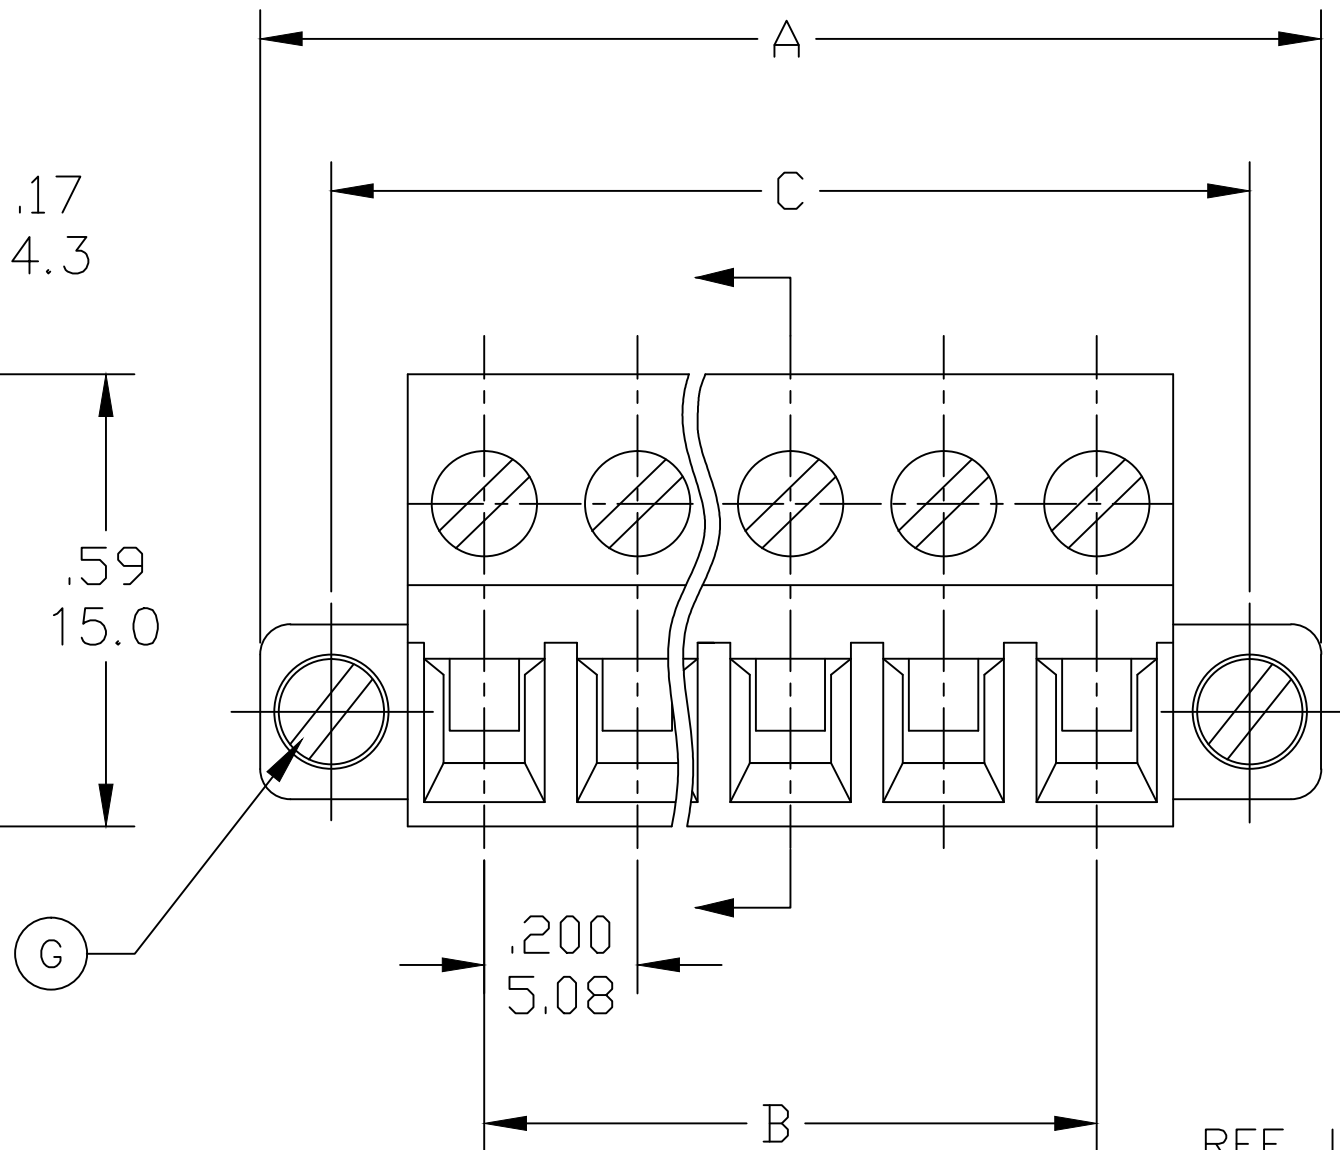


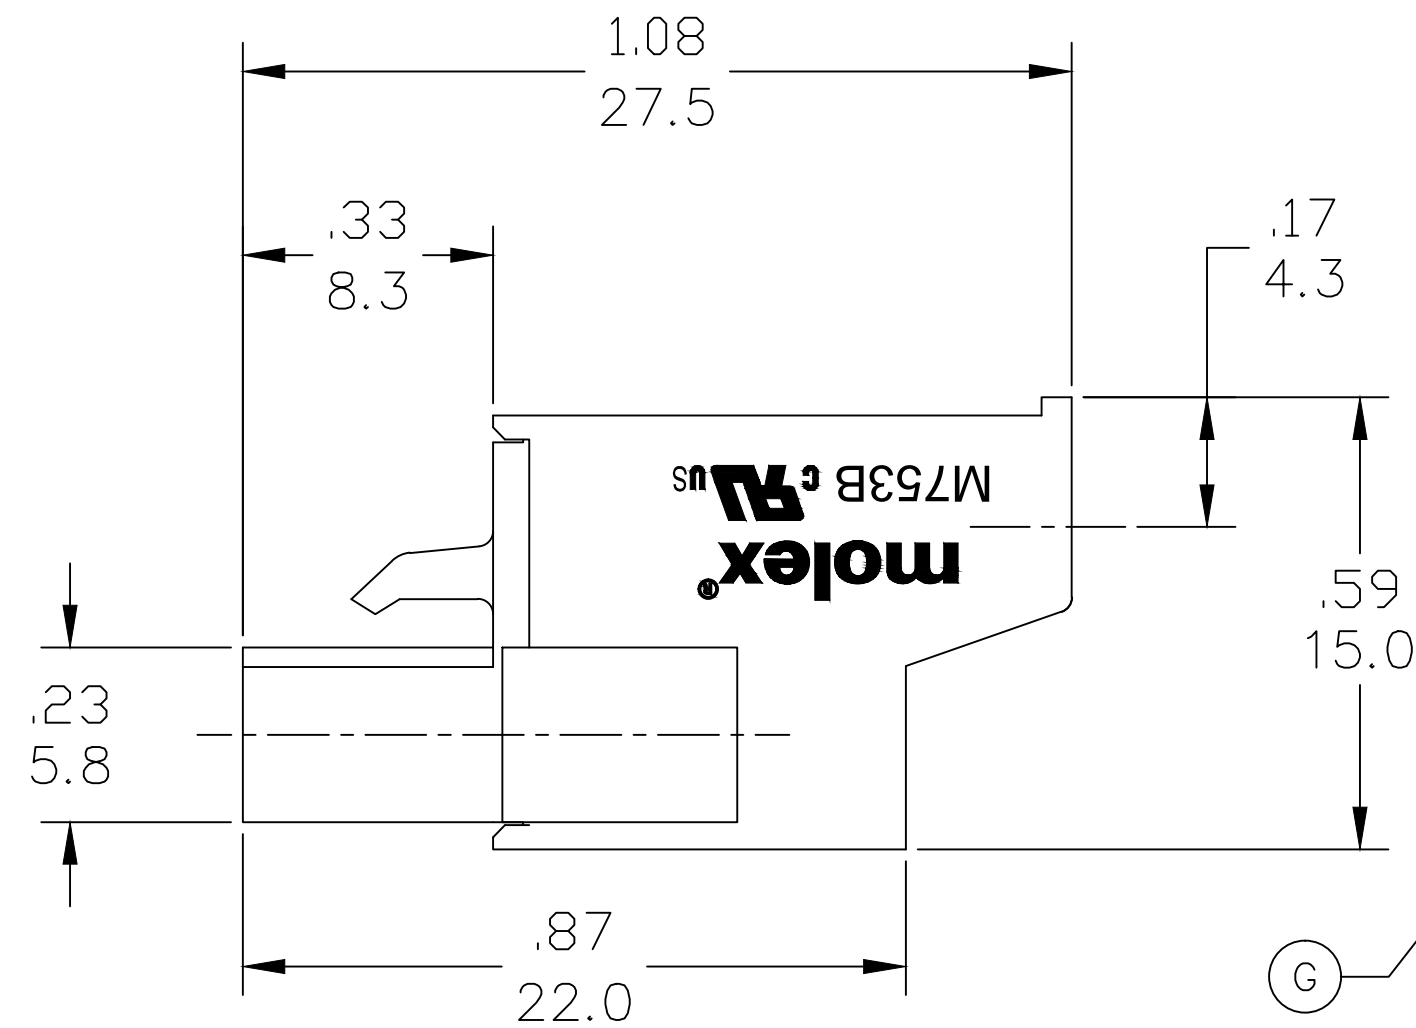

REF. LAST 2 DIGITS OF PART NUMBER EQUALS CIRCUIT COUNT

M753B-00-2-XX-3

COLOR
POSITIONS
PITCH
STYLE
SERIES

SPECIFICATIONS:

- MATERIAL:
 - BLOCK: STEEL ZINC PLATED
 - SCREW: M2.5, STEEL ZINC PLATED
 - BODY: PA66 UL94 V-0
 - CAM: STAINLESS STEEL
 - COVER: PA66 UL94 V-0
 - TERMINAL: BRASS TIN PLATED
 - MOUNTING SCREW: M2.5, STEEL ZINC PLATED
- WIRE SIZE: 30 TO 12AWG
- RATING: 15A AT 51-150V, 15A AT 151-300V
- MAX TORQUE: 3.5 IN. LBS. (.4 Nm)
- WIRE STRIP: .37 (9.5mm)
- DIELECTRIC VOLTAGE WITHSTAND: AC 2500V FOR 1 MINUTE
- INSULATION RESISTANCE: DC 500V, 500MΩ
- RATED IMPULSE VOLTAGE: 4000V, PLUS AND MINUS 5 TIMES EACH
- OPERATING TEMPERATURE: -40°C TO +105°C
- DIMS. GREATER THAN 1.18 (30mm) HAVE A Ⓟ TOLERANCE OF ±.02 (0.5mm)

PART NUMBER DATA									
CIRCUITS	PART NUMBER	ENGINEERING NUMBER	COLOR	A IN	mm	B IN	mm	C IN	mm
2	397110002	M753B-00-2-02-3	GREEN	.79	20.0	.200	5.08	.600	15.24
3	397110003	M753B-00-2-03-3	GREEN	.99	25.0	.400	10.15	.800	20.32
4	397110004	M753B-00-2-04-3	GREEN	1.19	30.1	.600	15.23	1.000	25.40
5	397110005	M753B-00-2-05-3	GREEN	1.39	35.2	.800	20.31	1.200	30.48
6	397110006	M753B-00-2-06-3	GREEN	1.59	40.3	1.000	25.39	1.400	35.56
7	397110007	M753B-00-2-07-3	GREEN	1.79	45.4	1.199	30.46	1.600	40.64
8	397110008	M753B-00-2-08-3	GREEN	1.99	50.4	1.399	35.54	1.800	45.72
9	397110009	M753B-00-2-09-3	GREEN	2.19	55.5	1.599	40.62	2.000	50.80
10	397110010	M753B-00-2-10-3	GREEN	2.39	60.6	1.799	45.70	2.200	55.88
11	397110011	M753B-00-2-11-3	GREEN	2.59	65.7	1.999	50.77	2.400	60.96
12	397110012	M753B-00-2-12-3	GREEN	2.79	70.8	2.199	55.85	2.600	66.04
13		M753B-00-2-13-3	GREEN	2.99	75.8	2.399	60.93	2.800	71.12
14		M753B-00-2-14-3	GREEN	3.19	80.9	2.599	66.01	3.000	76.20
15		M753B-00-2-15-3	GREEN	3.39	86.0	2.799	71.08	3.200	81.28
16		M753B-00-2-16-3	GREEN	3.59	91.1	2.999	76.16	3.400	86.36
17		M753B-00-2-17-3	GREEN	3.79	96.2	3.198	81.24	3.600	91.44
18		M753B-00-2-18-3	GREEN	3.99	101.2	3.398	86.32	3.800	96.52
19		M753B-00-2-19-3	GREEN	4.19	106.3	3.598	91.39	4.000	101.60
20		M753B-00-2-20-3	GREEN	4.39	111.4	3.798	96.47	4.200	106.68
21		M753B-00-2-21-3	GREEN	4.59	116.5	3.998	101.55	4.400	111.76
22		M753B-00-2-22-3	GREEN	4.79	121.6	4.198	106.63	4.600	116.84
23		M753B-00-2-23-3	GREEN	4.99	126.6	4.398	111.70	4.800	121.92
24		M753B-00-2-24-3	GREEN	5.19	131.7	4.598	116.78	5.000	127.00

Ⓟ SEE SHEET 2 FOR OPTIONAL (BLACK) PART NUMBERS

ADD SHEET 2, REV NOTES				DESCRIPTION	QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
						▽=0 ▽C=0				IN/MM		---	METRIC		
							mm	INCH	DRAWN BY	DATE	TITLE				
					4 PLACES		±---	±---	RSTONE	2014/03/17					
					3 PLACES		±---	±.005	CHECKED BY	DATE	TERMINAL PLUG, 5.08MM HORIZONTAL SCREW WITH MOUNTING ENDS				
					2 PLACES		±0.13	±.01	G FARNW	2014/05/15					
					1 PLACE		±0.3	±---	APPROVED BY	DATE	MOLEX INCORPORATED				
					ANGULAR ±---°			JFMURPHY	2014/10/16						
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
								SEE CHART		SD-39711-001		1 OF 1			
							THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

	10	9	8	7	6	5	4	3	2	1																													
F	REF. LAST 2 DIGITS OF PART NUMBER EQUALS CIRCUIT COUNT										F																												
F	PART NUMBER DATA																																						
	CIRCUITS	PART NUMBER	ENGINEERING NUMBER	COLOR	A IN	mm	B IN	mm	C IN	mm																													
	2	395341002	M753B-00-2-02-1	BLACK	.79	20.0	.200	5.08	.600	15.24																													
	3	395341003	M753B-00-2-03-1	BLACK	.99	25.0	.400	10.15	.800	20.32																													
E	4	395341004	M753B-00-2-04-1	BLACK	1.19	30.1	.600	15.23	1.000	25.40																													
	5	395341005	M753B-00-2-05-1	BLACK	1.39	35.2	.800	20.31	1.200	30.48																													
	6	395341006	M753B-00-2-06-1	BLACK	1.59	40.3	1.000	25.39	1.400	35.56																													
	7	395341007	M753B-00-2-07-1	BLACK	1.79	45.4	1.199	30.46	1.600	40.64																													
E	8	395341008	M753B-00-2-08-1	BLACK	1.99	50.4	1.399	35.54	1.800	45.72	E																												
	9	395341009	M753B-00-2-09-1	BLACK	2.19	55.5	1.599	40.62	2.000	50.80																													
	10	395341010	M753B-00-2-10-1	BLACK	2.39	60.6	1.799	45.70	2.200	55.88																													
	11	395341011	M753B-00-2-11-1	BLACK	2.59	65.7	1.999	50.77	2.400	60.96																													
D	12	395341012	M753B-00-2-12-1	BLACK	2.79	70.8	2.199	55.85	2.600	66.04																													
	13		M753B-00-2-13-1	BLACK	2.99	75.8	2.399	60.93	2.800	71.12																													
	14		M753B-00-2-14-1	BLACK	3.19	80.9	2.599	66.01	3.000	76.20																													
	15		M753B-00-2-15-1	BLACK	3.39	86.0	2.799	71.08	3.200	81.28																													
D	16	395341016	M753B-00-2-16-1	BLACK	3.59	91.1	2.999	76.16	3.400	86.36	D																												
	17		M753B-00-2-17-1	BLACK	3.79	96.2	3.198	81.24	3.600	91.44																													
	18		M753B-00-2-18-1	BLACK	3.99	101.2	3.398	86.32	3.800	96.52																													
	19		M753B-00-2-19-1	BLACK	4.19	106.3	3.598	91.39	4.000	101.60																													
C	20		M753B-00-2-20-1	BLACK	4.39	111.4	3.798	96.47	4.200	106.68																													
	21	395341021	M753B-00-2-21-1	BLACK	4.59	116.5	3.998	101.55	4.400	111.76																													
	22		M753B-00-2-22-1	BLACK	4.79	121.6	4.198	106.63	4.600	116.84																													
	23		M753B-00-2-23-1	BLACK	4.99	126.6	4.398	111.70	4.800	121.92																													
C	24	395341024	M753B-00-2-24-1	BLACK	5.19	131.7	4.598	116.78	5.000	127.00	C																												
CONTACT FACTORY FOR OPTIONAL COLORS																																							
B											B																												
A					ADD SHT 2, NEW P/N 395341021 EC NO: IPG2015-1309 DRWN: RSTONE 1/21/15 CHKD: B ARDEN 2015/01/22 APPR: JFMURPHY 2014/10/16	DESCRIPTION	REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		A																					
									IN/MM		---		TERMINAL PLUG, 5.08MM HORIZONTAL SCREW WITH MOUNTING ENDS																										
									DRAWN BY DATE		TITLE																												
									RSTONE 2014/03/17																														
									CHECKED BY DATE		G FARNW 2014/05/15		APPROVED BY DATE		JFMURPHY 2014/10/16		MATERIAL NO.		DOCUMENT NO.		SHEET NO.																		
									4 PLACES ±---		3 PLACES ±---		2 PLACES ±0.13		1 PLACE ±0.3		ANGULAR ±---°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART																		
									SIZE		B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		MOLEX INCORPORATED		SD-39711-001		2 OF 2																				
	10	9	8	7	6	5	4	3	2	1																													



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.