


**SH Series**



**Agency Approvals**

| Agency | Agency File Number |
|--------|--------------------|
|        | E128662            |

**Two Electrode GDT Graphical Symbol**



**Additional Information**



**Datasheet**



**Resources**



**Samples**

**Description**

The Littelfuse SH Gas Discharge Tubes (GDT) series provides high levels of protection against fast rising transients caused by lightning disturbances. It has a surge rating of 5kA, 8/20 $\mu$ s. Offered in a Squared Surface Mount package, which helps to make pick and place on PCB process easier.

This GDT series is perfectly suited for broadband equipment applications. The GDT's low off-state capacitance is compatible with high bandwidth applications and this capacitance loading value does not vary if the voltage across the GDT changes.

The Littelfuse SH Gas Discharge Tube (GDT) series are specifically designed for protection of electrical, multimedia, and communication equipment against over voltage transients in surface mount assembly applications.

**Features**

- Excellent response to fast rising transients
- GHz working frequency
- 5kA, 8/20 $\mu$ s surge capability as defined by IEC 61000-4-5 2<sup>nd</sup> Edition
- UL recognized
- Offered with squared body package
- Non-Radioactive
- Ultra Low capacitance (<0.7pF)
- Lead-free and RoHS compliant

**Applications**

- CATV equipment
- Antennas
- RS 485
- Telecom Base Station
- Power Supply AC Main
- G.fast
- EV power Charging
- Inverter/Variable Frequency Drivers (VFDs)
- IEEE 802.3 compliant Ethernet interfaces
- Broad Band equipment
- xDSL, ADSL, ADSL2, VDSL, and VDSL2
- Medical Electronics
- Test Equipment
- General Telecom Equipment
- Renewable Energy

### Electrical Characteristics

| Part Number | Component Specifications (at 25°C) |     |     |                                    |          |  |                       | Life Ratings         |                                     |                                   |                                       |                               |                                 |
|-------------|------------------------------------|-----|-----|------------------------------------|----------|--|-----------------------|----------------------|-------------------------------------|-----------------------------------|---------------------------------------|-------------------------------|---------------------------------|
|             | DC Breakdown in Volts (@ 100V/s)   |     |     | Maximum Impulse Break-down Voltage |          | Maximum Impulse Discharge Current (8/20µs) | Insulation Resistance | Capacitance (@ 1MHz) | Impulse Discharge Current (8/20µs)  | AC Discharge Current (50Hz, 1sec) | AC Discharge Current (9 Cycles @50Hz) | DC Holdover Voltage (<150ms)* | Impulse Life (10/1000µs) (100A) |
|             | MIN                                | TYP | MAX | @ 100V/µs                          | 1000V/µs | 1 Time                                     | MIN                   | MAX                  | MAX                                 | MIN                               | MIN                                   |                               | MIN                             |
| SH75        | 60                                 | 75  | 90  | 600                                | 700      | 6kA  | 1GΩ @50V              | 0.7pf                | 10 Shots @ (5kA)<br>1 Shot at 6kA** | 5A                                | 15A                                   | 52V                           | 300 Shots                       |
| SH90        | 72                                 | 90  | 108 | 600                                | 700      |  | 52V                   |                      |                                     |                                   |                                       |                               |                                 |
| SH145       | 116                                | 145 | 174 | 600                                | 700      |  | 52V                   |                      |                                     |                                   |                                       |                               |                                 |
| SH230       | 186                                | 230 | 276 | 600                                | 700      |  | 80V                   |                      |                                     |                                   |                                       |                               |                                 |
| SH250       | 200                                | 250 | 300 | 600                                | 700      |  | 135V                  |                      |                                     |                                   |                                       |                               |                                 |
| SH300       | 240                                | 300 | 360 | 650                                | 800      |  | 135V                  |                      |                                     |                                   |                                       |                               |                                 |
| SH350       | 280                                | 350 | 420 | 750                                | 900      |  | 135V                  |                      |                                     |                                   |                                       |                               |                                 |
| SH400       | 360                                | 400 | 480 | 850                                | 1000     |  | 135V                  |                      |                                     |                                   |                                       |                               |                                 |
| SH470       | 376                                | 470 | 564 | 900                                | 1100     |  | 150V                  |                      |                                     |                                   |                                       |                               |                                 |
| SH600       | 480                                | 600 | 720 | 1000                               | 1200     |  | 150V                  |                      |                                     |                                   |                                       |                               |                                 |

Note:

\* Reference REA PE-80, 0.2A, tested to ITU-T Rec K.12 and REA PE 80 <150 ms.

\*\* DC spark-over may exceed ± 25% after discharge, but will continue to protect without venting

### Product Characteristics


|  |  |
|--|--|
| <b>Materials</b>                           | Device Tin Plated 17.5 ± 12.5 Microns<br>Construction: Ceramic Insulator |
| <b>Storage and Operational Temperature</b> | -40 to +90°C   |

### Typical Insertion Loss

|                  |
|------------------|
| @1.0GHz = 0.08dB |
| @1.4GHz = 0.16dB |
| @1.8GHz = 0.26dB |
| @2.0GHz = 0.33dB |
| @2.4GHz = 0.47dB |
| @2.8GHz = 0.59dB |
| @3.1GHz = 0.70dB |
| @3.5GHz = 0.89dB |
| @4.0GHz = 1.24dB |

Note: Insertion data for customer reference only, application testing needed for verification.


### Voltage Vs. Time Characteristic

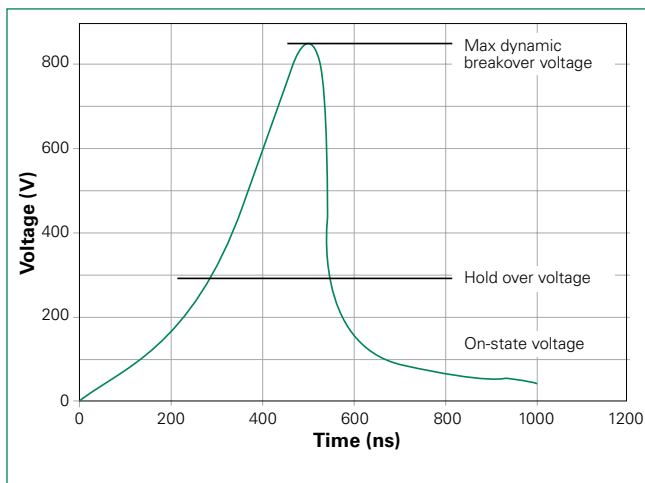

Note: Tested per 1kV/µs waveform



**Soldering Parameters - Reflow Soldering (Surface Mount Devices)**

|  |                                    |                         |
|--|------------------------------------|-------------------------|
| <b>Reflow Condition</b>  |                                    | Pb – Free assembly      |
| <b>Pre Heat</b>  | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|  | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|  | - Time (Min to Max) ( $t_s$ )      | 60 – 180 secs           |
| <b>Average ramp up rate (Liquidus Temp (<math>T_L</math>) to peak)</b> |                                    | 3°C/second max          |
| <b><math>T_{s(max)}</math> to <math>T_L</math> - Ramp-up Rate</b>      |                                    | 5°C/second max          |
| <b>Reflow</b>  | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|  | - Temperature ( $t_L$ )            | 60 – 150 seconds        |
| <b>Peak Temperature (<math>T_p</math>)</b>                             |                                    | 260 <sup>+0/-5</sup> °C |
| <b>Time within 5°C of actual peak Temperature (<math>t_p</math>)</b>   |                                    | 10 – 30 seconds         |
| <b>Ramp-down Rate</b>  |                                    | 6°C/second max          |
| <b>Time 25°C to peak Temperature (<math>T_p</math>)</b>                |                                    | 8 minutes Max.          |
| <b>Do not exceed</b>   |                                    | 260°C                   |

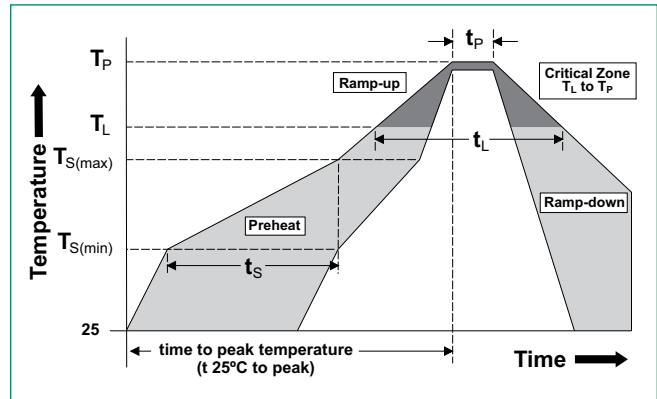


**Product Dimensions**

Dimensions in millimeters

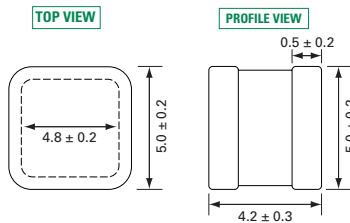

Recommended Soldering Pad Layout


**Product Marking**

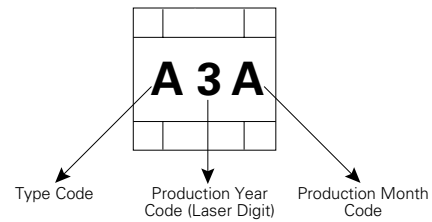

| Type Code |       |
|-----------|-------|
| A         | SH75  |
| B         | SH90  |
| S         | SH145 |
| D         | SH230 |
| R         | SH250 |
| E         | SH300 |
| G         | SH350 |
| I         | SH400 |
| P         | SH470 |
| V         | SH600 |

| Month Code |           |
|------------|-----------|
| A          | January   |
| B          | February  |
| C          | March     |
| D          | April     |
| E          | May       |
| F          | June      |
| G          | July      |
| H          | August    |
| I          | September |
| J          | October   |
| K          | November  |
| L          | December  |

**Part Numbering System and Ordering Information**

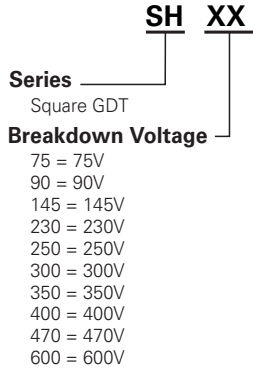


**Taping and Reel Specifications**

**Taping**

Unit = mm

| Item | Spec     | Item | Spec       |
|------|----------|------|------------|
| P    | 12.0±0.1 | D    | Ø1.55±0.05 |
| P0   | 4.0±0.1  | W    | 16.0±0.3   |
| A    | 5.4±0.1  | K0   | 5.4±0.1    |
| B    | 4.6±0.1  | t    | 0.5±0.05   |

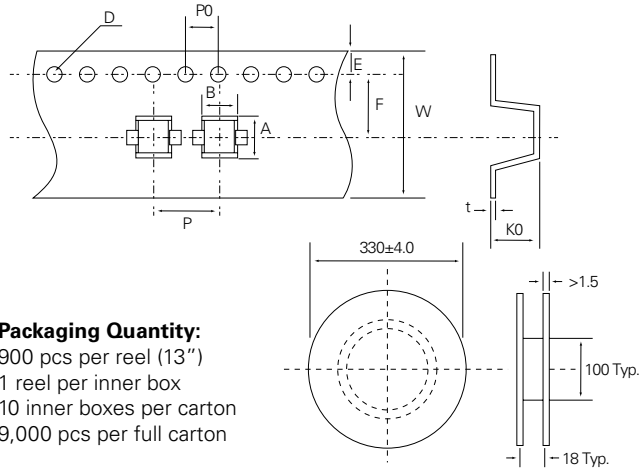

**Packaging Quantity:**  
900 pcs per reel (13")  
1 reel per inner box  
10 inner boxes per carton  
9,000 pcs per full carton

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.