

ATC 100 B Series Porcelain Superchip® Multilayer Capacitors

- Case B Size (.110" x .110")
- Capacitance Range 0.1 pF to 1000 pF
- High Q
- Ultra-Stable Performance
- Low ESR/ESL
- High Self-Resonance
- Low Noise
- Established Reliability (QPL)
- Extended WVDC up to 1500 VDC

ATC, the industry leader, offers new improved ESR/ESL performance for the 100 B Series RF/Microwave Capacitors. This Series is now available with extended operating temperatures up to 175°C. High Density porcelain construction provides a rugged, hermetic package.

Typical functional applications: Bypass, Coupling, Tuning, Feedback, Impedance Matching and DC Blocking.

Typical circuit applications: UHF/Microwave RF Power Amplifiers, Mixers, Oscillators, Low Noise Amplifiers, Filter Networks, Timing Circuits and Delay Lines.

ENVIRONMENTAL TESTS

ATC 100 B Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK: MIL-STD-202, Method 107, Condition A.

MOISTURE RESISTANCE: MIL-STD-202, Method 106.

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C.

Voltage Applied:

200% of WVDC for capacitors rated at 500 volts DC or less.

120% of WVDC for capacitors rated at 1250 volts DC or less.

100% of WVDC for capacitors rated above 1250 volts DC.



ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q): greater than 10,000 at 1 MHz.

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

+90 ±20 PPM/°C (-55°C to +125°C)
+90 ±30 PPM/°C (+125°C to +175°C)

INSULATION RESISTANCE (IR):

0.1 pF to 470 pF:

10⁶ Megohms min. @ +25°C at rated WVDC.

10⁵ Megohms min. @ +125°C at rated WVDC.

510 pF to 1000 pF:

10⁵ Megohms min. @ +25°C at rated WVDC.

10⁴ Megohms min. @ +125°C at rated WVDC.

IR above +125°C is derated by one order of magnitude.

WORKING VOLTAGE (WVDC): See Capacitance Values Table, page 2.

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

250% of WVDC for capacitors rated at 500 volts DC or less for 5 seconds.

150% of WVDC for capacitors rated at 1250 volts DC or less for 5 seconds.

120% of WVDC for capacitors rated above 1250 volts DC for 5 seconds.

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater.

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS:

None (No capacitance variation with voltage or pressure).

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater.

OPERATING TEMPERATURE RANGE:

0.1 to 330 pF: from -55°C to +175°C

360 to 1000 pF: from -55°C to +125°C

TERMINATION STYLES:

Available in various surface mount and leaded styles.

See Mechanical Configurations, page 3.

TERMINAL STRENGTH: Terminations for chips and pellets withstand a pull of 5 lbs. min., 15 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



AMERICAN

ATC North America
sales@atceramics.com

TECHNICAL

ATC Europe
saleseur@atceramics.com

CERAMICS

ATC Asia
sales@atceramics-asia.com



ISO 9001 REGISTERED
COMPANY

THE ENGINEERS' CHOICE™

www.atceramics.com

ATC # 001-807 Rev. Q; 9/14

ATC 100 B Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		
			STD.	EXT.				STD.	EXT.				STD.	EXT.				STD.	EXT.	
0R1	0.1	B	500	EXTENDED VOLTAGE 1500	2R4	2.4	B, C, D	500	EXTENDED VOLTAGE 1500	200	20	F, G, J, K, M	500	EXTENDED VOLTAGE 1500	151	150	F, G, J, K, M	300	VOLT 1000 EXT	
0R2	0.2				2R7	2.7				220	22				161	160				
0R3	0.3				B, C	3R0				3.0	240				24	181				180
0R4	0.4					3R3				3.3	270				27	201				200
0R5	0.5	B, C, D			3R6	3.6				300	30				221	220				
0R6	0.6				3R9	3.9				330	33				241	240				
0R7	0.7				4R3	4.3				360	36				271	270				
0R8	0.8				4R7	4.7				390	39				301	300				
0R9	0.9				5R1	5.1				430	43				331	330				
1R0	1.0				5R6	5.6				470	47				361	360				
1R1	1.1				6R2	6.2				510	51				391	390				
1R2	1.2				6R8	6.8	560			56	431				430					
1R3	1.3				7R5	7.5	620			62	471				470					
1R4	1.4				8R2	8.2	680			68	511				510					
1R5	1.5				9R1	9.1	750			75	561				560					
1R6	1.6				100	10	820			82	621				620					
1R7	1.7				110	11	910			91	681				680					
1R8	1.8				120	12	101			100	751				750					
1R9	1.9				130	13	111			110	821				820					
2R0	2.0				150	15	121			120	911		910							
2R1	2.1				160	16	131			130	102		1000							
2R2	2.2				180	18														

VRMS = 0.707 X WVDC

• SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.

NOTE: EXTENDED WVDC DOES NOT APPLY TO CDR PRODUCTS.

ATC PART NUMBER CODE

Series ATC100 B 91 0 J W 500 X T Packaging

Case Size _____

Capacitance Code: _____
First 2 significant digits for capacitance.
R=Decimal Point

Indicates number of zeros following digits of capacitance in picofarads except for decimal values.

Capacitance Tolerance _____

TV - Vertical Orientation of Product, Tape and Reel, 1000 pc. qty.*
I - Special Packaging. Consult Factory.
*Consult ATC for other quantities
ATC Cap-Pac® packaging (100 pc. qty. std.) is also available.
For this option, leave last field blank.

Laser Marking
WVDC
Termination Code

CAPACITANCE TOLERANCE								
Code	B	C	D	F	G	J	K	M
Tol.	±0.1 pF	±0.25 pF	±0.5 pF	±1%	±2%	±5%	±10%	±20%

The above part number refers to a 100 B Series (case size B) 91 pF capacitor, J tolerance (±5%), 500 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and Tape and Reel packaging.

ATC accepts orders for our parts using designations **with** or **without** the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.










A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
saleseur@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 100 B Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	MIL-PRF- 55681	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS				
					LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS			
100B	W	CDR14BG	B  Solder Plate		.110 +.020 -.010 (2.79 +0.51 -.025)	.110 ±.015 (2.79 ±0.38)	.102 (2.59) max.	.015 (0.38) ±.010 (0.25)	Tin /Lead, Solder Plated over Nickel Barrier Termination			
100B	P	CDR14BG	B  Pellet		.110 +.035 -.010 (2.79 +0.89 -.025)	.110 ±.015 (2.79 ±0.38)			Heavy Tin/Lead Coated, over Nickel Barrier Termination			
100B	T	N/A	B  Solderable Nickel Barrier		.110 +.020 -.010 (2.79 +0.51 -.025)	.110 ±.015 (2.79 ±0.38)			<i>RoHS Compliant</i> Tin Plated over Nickel Barrier Termination			
100B	CA	CDR13BG	B  Gold Chip		.110 +.020 -.010 (2.79 +0.51 -.025)	.110 ±.015 (2.79 ±0.38)			<i>RoHS Compliant</i> Gold Plated over Nickel Barrier Termination			
100B	MS	CDR21BG	B  Microstrip		.135 ±.015 (3.43 ±0.38)	.110 ±.015 (2.79 ±0.38)	.120 (3.05) max.	N/A	Length (L _L)	Width (W _L)	Thickness (T _L)	
100B	AR	CDR22BG	B  Axial Ribbon				.102 (2.59) max.					
100B	RR	CDR24BG	B  Radial Ribbon									
100B	RW	CDR23BG	B  Radial Wire		.145 ±.020 (3.68 ±0.51)							
100B	AW	CDR25BG	B  Axial Wire									

Additional lead styles available: Narrow Microstrip (NM), Narrow Axial Ribbon (NA) and Vertical Narrow Microstrip (H). Other lead lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant. For a complete military catalog, request American Technical Ceramics document ATC 001-818.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 100 B Non-Magnetic Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	MIL-PRF- 55681	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS					
					LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS				
100B	WN	Meets Require- ments	 B Non-Mag Solder Plate	 Y→ ↓ W → L ← ↑ T ←	.110 +.025 -.010 (2.79 +.64 -.25)	.110 ±.015 (2.79 ±0.38)	.102 (2.59) max.	.015 (0.38) ±.010 (0.25)	Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination				
100B	PN	Meets Require- ments	 B Non-Mag Pellet	 Y→ ↓ W → L ← ↑ T ←	.110 +.035 -.010 (2.79 +.89 -.25)	.110 ±.015 (2.79 ±0.38)			Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination				
100B	TN	Meets Require- ments	 B Non-Mag Solderable Barrier	 Y→ ↓ W → L ← ↑ T ←	.110 +.025 -.010 (2.79 +.64 -.25)	.110 ±.015 (2.79 ±0.38)			<i>RoHS Compliant</i> Tin Plated over Non-Magnetic Barrier Termination				
100B	MN	Meets Require- ments	 Non-Mag Microstrip	 ↓ W _L L _L ← ↑ → L ← ↓ W _L T _L ← ↑ → T ←	.135 ±.015 (3.43 ±0.38)	.110 ±.015 (2.79 ±0.38)	.120 (3.05) max.	N/A	Length (L _L)	Width (W _L)	Thickness (T _L)		
100B	AN	Meets Require- ments	 Non-Mag Axial Ribbon	 ↓ W _L L _L ← ↑ → L ← ↓ W _L T _L ← ↑ → T ←			.102 (2.59) max.		.250 (6.35) min.	.093 ±.005 (2.36 ±0.13)	.004 ±.001 (.102 ±.025)		
100B	FN	Meets Require- ments	 B Non-Mag Radial Ribbon	 → L ← ↓ W _L L _L ← ↑ → T ← ↓ W _L T _L ← ↑ → T ←					.145 ±.020 (3.68 ±0.51)				
100B	RN	Meets Require- ments	 B Non-Mag Radial Wire	 → L ← ↓ T _L L _L ← ↑ → W ← ↓ T _L T _L ← ↑ → T ←	.500 (12.7) min.	#26 AWG., .016 (.406) dia. nominal							
100B	BN	Meets Require- ments	 B Non-Mag Axial Wire	 → L ← ↓ L _L L _L ← ↑ → W ← ↓ T _L T _L ← ↑ → T ←									

Additional lead styles available: Narrow Microstrip (DN), Narrow Axial Ribbon (GN) and Vertical Narrow Microstrip (HN). Other lead lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.

Suggested Mounting Pad Dimensions

Horizontal
Electrode Orientation

Vertical
Electrode Orientation

Case B Vertical Mount

Dimensions are in inches

Cap Value	Pad Size	A Min.	B Min.	C Min.	D Min.
0.1 pF	Normal	.065	.050	.075	.175
	High Density	.045	.030	.075	.135
0.2 pF	Normal	.090	.050	.075	.175
	High Density	.070	.030	.075	.135
0.3 to 510 pF	Normal	.110	.050	.075	.175
	High Density	.090	.030	.075	.135
> 510 pF	Normal	.120	.050	.075	.175
	High Density	.100	.030	.075	.135

Horizontal Mount

Dimensions are in inches

All values	Pad Size	A Min.	B Min.	C Min.	D Min.
All values	Normal	.130	.050	.075	.175
	High Density	.110	.030	.075	.135

AMERICAN TECHNICAL CERAMICS


ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com


ATC Asia
sales@atceramics-asia.com

ATC 100 B Performance Data


ESR VS. CAPACITANCE
ATC SERIES 100, CASE B

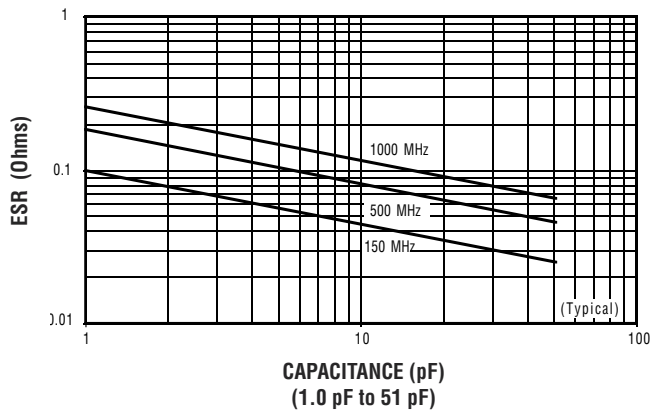


Q VS. CAPACITANCE
ATC SERIES 100, CASE B

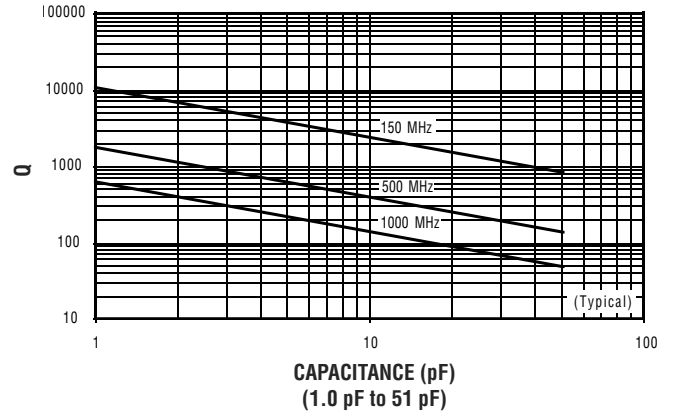


ESR VS. CAPACITANCE
ATC SERIES 100, CASE B

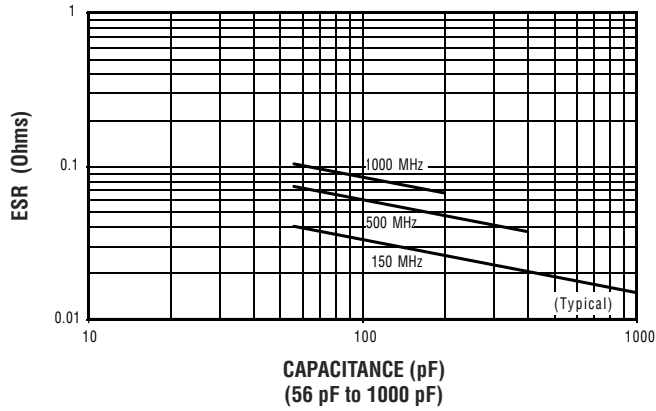


Q VS. CAPACITANCE
ATC SERIES 100, CASE B

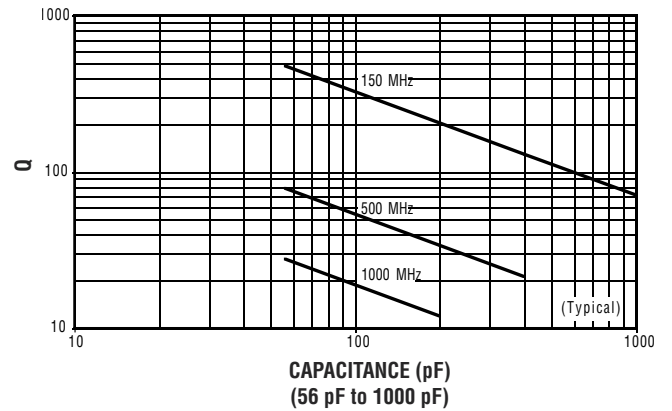

SERIES RESONANCE VS. CAPACITANCE
ATC SERIES 100, CASE B

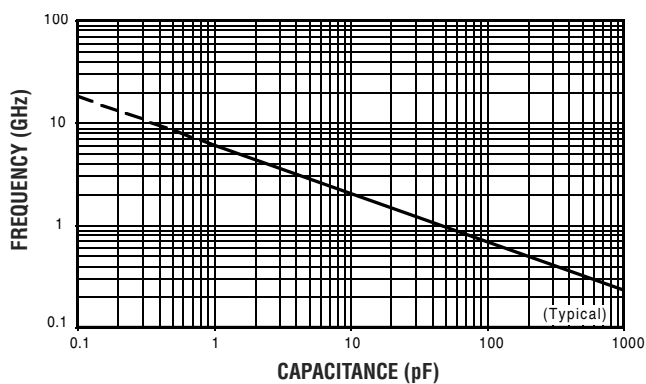

CAPACITANCE CHANGE VS. TEMPERATURE
ATC SERIES 100, CASE B

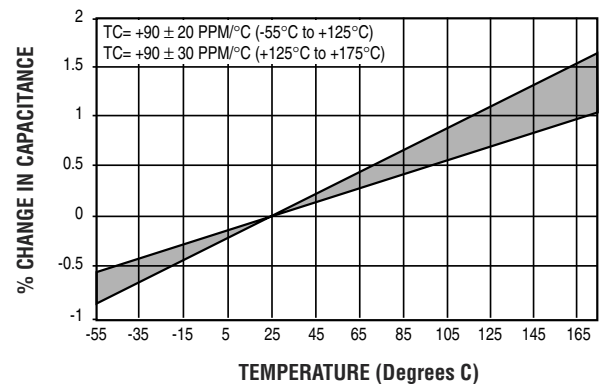

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America
sales@atceramics.com

ATC Europe
saleseur@atceramics.com


ATC Asia
sales@atceramics-asia.com

ATC 100 B Performance Data


**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE B**

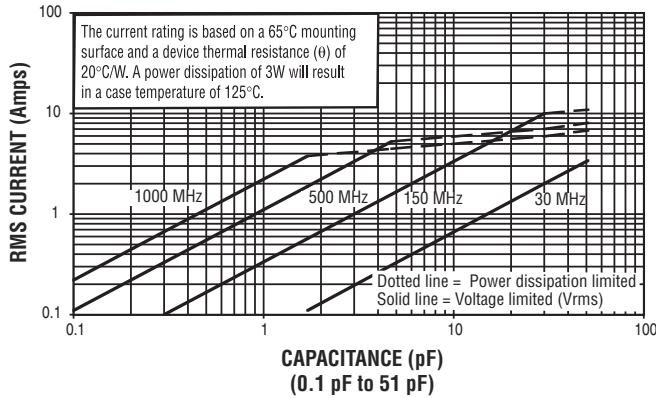

**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE B**

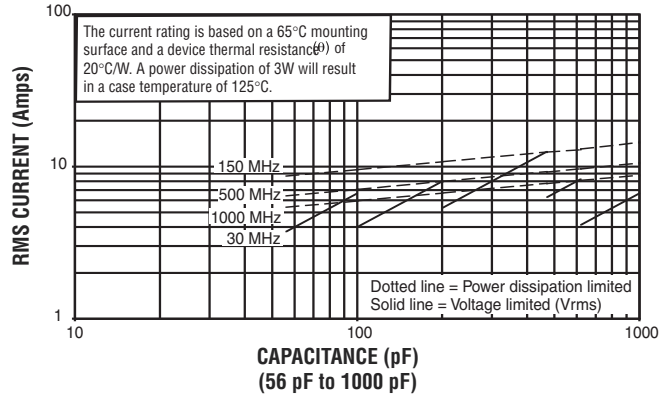

**CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE B, EXTENDED VOLTAGE**

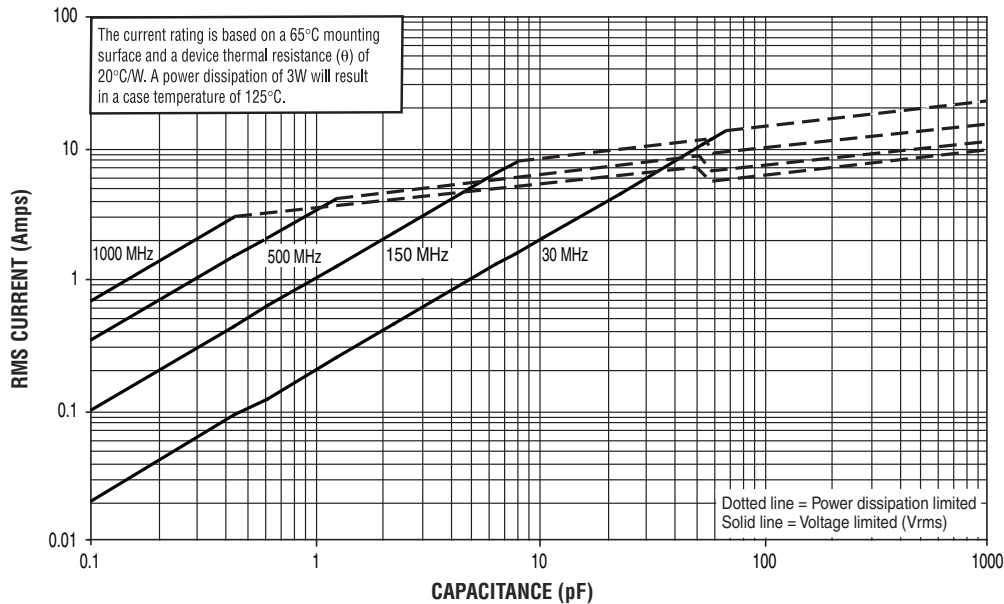

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B; 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 1996 American Technical Ceramics Corp. All Rights Reserved

ATC # 001-807 Rev. Q 9/14



AMERICAN

ATC North America
sales@atceramics.com

TECHNICAL

ATC Europe
saleseur@atceramics.com

CERAMICS

ATC Asia
sales@atceramics-asia.com



THE ENGINEERS'
CHOICE®

ISO 9001 REGISTERED
COMPANY

THE ENGINEERS' CHOICE™

www.atceramics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

American Technical Ceramics (ATC):

[100B0R1BT500XT](#) [100B0R1BW500XT](#) [100B0R2BT500XT](#) [100B0R2BW500XT](#) [100B0R3BT500XT](#)
[100B0R3BW500XT](#) [100B0R3CT500XT](#) [100B0R3CW500XT](#) [100B0R4BT500XT](#) [100B0R4BW500XT](#)
[100B0R4CT500XT](#) [100B0R4CW500XT](#) [100B0R5BT500XT](#) [100B0R5BW500XT](#) [100B0R5CT500XT](#)
[100B0R5CW500XT](#) [100B0R5DT500XT](#) [100B0R5DW500XT](#) [100B0R6BT500XT](#) [100B0R6BW500XT](#)
[100B0R6CT500XT](#) [100B0R6CW500XT](#) [100B0R6DT500XT](#) [100B0R6DW500XT](#) [100B0R7BT500XT](#)
[100B0R7BW500XT](#) [100B0R7CT500XT](#) [100B0R7CW500XT](#) [100B0R7DT500XT](#) [100B0R7DW500XT](#)
[100B0R8BT500XT](#) [100B0R8BW500XT](#) [100B0R8CT500XT](#) [100B0R8CW500XT](#) [100B0R8DT500XT](#)
[100B0R8DW500XT](#) [100B0R9BT500XT](#) [100B0R9BW500XT](#) [100B0R9CT500XT](#) [100B0R9CW500XT](#)
[100B0R9DT500XT](#) [100B0R9DW500XT](#) [100B100FT500XT](#) [100B100FW500XT](#) [100B100GT500XT](#)
[100B100GW500XT](#) [100B100JT500XT](#) [100B100JW500XT](#) [100B100KT500XT](#) [100B100KW500XT](#) [100B100MT500XT](#)
[100B100MW500XT](#) [100B101FT500XT](#) [100B101FW500XT](#) [100B101GT500XT](#) [100B101GW500XT](#)
[100B101JT500XT](#) [100B101KT500XT](#) [100B101KW500XT](#) [100B101MT500XT](#) [100B101MW500XT](#) [100B102FT50XT](#)
[100B102FW50XT](#) [100B102GT50XT](#) [100B102GW50XT](#) [100B102JT50XT](#) [100B102JW50XT](#) [100B102KT50XT](#)
[100B102KW50XT](#) [100B102MT50XT](#) [100B102MW50XT](#) [100B110FT500XT](#) [100B110FW500XT](#) [100B110GT500XT](#)
[100B110GW500XT](#) [100B110JT500XT](#) [100B110JW500XT](#) [100B110KT500XT](#) [100B110KW500XT](#) [100B110MT500XT](#)
[100B110MW500XT](#) [100B111FT300XT](#) [100B111FW300XT](#) [100B111GT300XT](#) [100B111GW300XT](#)
[100B111JT300XT](#) [100B111JW300XT](#) [100B111KT300XT](#) [100B111KW300XT](#) [100B111MT300XT](#) [100B111MW300XT](#)
[100B120FT500XT](#) [100B120FW500XT](#) [100B120GT500XT](#) [100B120GW500XT](#) [100B120JT500XT](#)
[100B120JW500XT](#) [100B120KT500XT](#) [100B120KW500XT](#) [100B120MT500XT](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.