



MJD210

PNP SILICON TRANSISTOR

PNP SILICON DPAK FOR SURFACE MOUNT APPLICATIONS

DESCRIPTION

The UTC MJD210 is designed for low voltage, low-power, high-gain audio amplifier applications.

FEATURE

*Collector-Emitter Sustaining Voltage

$V_{CE(SUS)} = -25V$ (Min) @ $I_C = -10mA$

*High DC Current Gain

$h_{FE} = 70$ (Min) @ $I_C = -500mA$

$= 45$ (Min) @ $I_C = -2A$

$= 10$ (Min) @ $I_C = -5A$

*Lead Formed for Surface Mount Applications in Plastic Sleeves (No Suffix)

*Straight Lead Version in Plastic Sleeves ("-1" Suffix)

*Lead Formed Version in 16mm Tape and Reel ("T4" Suffix)

*Low Collector – Emitter Saturation Voltage

$V_{CE(SAT)} = -0.3V$ (Max) @ $I_C = -500mA$

$= -0.75V$ (Max) @ $I_C = -2.0 A$

*High Current-Gain-Bandwidth Product


$f_T = 65 MHz$ (Min) @ $I_C = -100 mA$


*Annular Construction for Low Leakage

$I_{CBO} = -100 nA$ @ Rated V_{CB}

ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free Plating	Halogen Free		1	2	3	
MJD210L-TM3-T	MJD210G-TM3-T	TO-251	B	C	E	Tube
MJD210L-TN3-T	MJD210G-TN3-T	TO-252	B	C	E	Tube
MJD210L-TN3-R	MJD210G-TN3-R	TO-252	B	C	E	Tape Reel

MJD210G-TM3-T  (1)Packing Type (2)Package Type (3)Halogen Free		(1) T: Tube, R: Tape Reel (2) TM3: TO-251, TN3: TO-252 (3) G: Halogen Free, L: Lead Free Plating
---	--	---

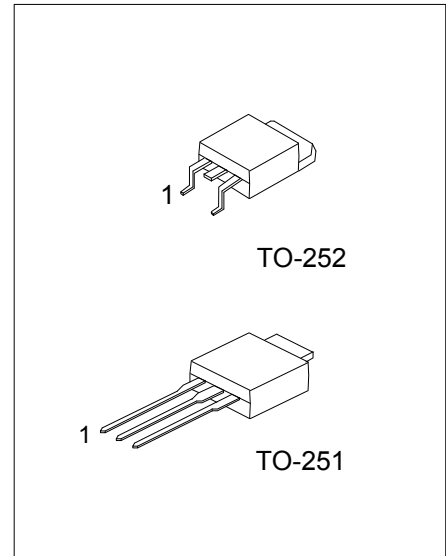

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Base Voltage		V_{CBO}	-40	V
Collector-Emitter Voltage		V_{CEO}	-25	V
Emitter-Base Voltage		V_{EBO}	-7	V
Collector Current	Continuous	I_C	-5	A
	Peak		-10	A
Base Current		I_B	-1	A
Total Device Dissipation	T _C =25°C	P_D	12.5	W
	Derate above 25°C		0.1	W/°C
	Ta=25°C (Note2)		1.4	W
	Derate above 25°C		0.011	W/°C
Junction Temperature		T_J	+150	°C
Storage Junction Temperature		T_{STG}	-65 ~ +150	°C

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. When surface mounted on minimum pad sizes recommended.

■ THERMAL DATA (Ta=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATING	UNIT
Junction to Ambient	θ_{JA}	89.3	°C/W
Junction to Case	θ_{JC}	10	°C/W







■ ELECTRICAL CHARACTERISTICS (Ta=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	MAX	UNIT
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage(Note 1)	$V_{CEO(SUS)}$	$I_C=-10mA, I_B=0$	-25		V
Collector Cutoff Current	I_{CBO}	$V_{CB}=-40V, I_E=0$		-100	nA
		$V_{CB}=-40V, I_E=0, T_J=125°C$		-100	nA
Emitter Cutoff Current	I_{EBO}	$V_{BE}=-7V, I_C=0$		-100	nA
ON CHARACTERISTICS					
DC Current Gain (Note 1)	h_{FE}	$I_C=-500mA, V_{CE}=-1V$	70		
		$I_C=-2A, V_{CE}=-1V$	45	180	
		$I_C=-5A, V_{CE}=-2V$	10		
Collector-Emitter Saturation Voltage (Note 1)	$V_{CE(SAT)}$	$I_C=-500mA, I_B=-50mA$		-0.3	V
		$I_C=-2A, I_B=-200mA$		-0.75	
		$I_C=-5A, I_B=-1A$		-1.8	
Base-Emitter Saturation Voltage (Note 1)	$V_{BE(SAT)}$	$I_C=-5A, I_B=-1A$		-2.5	V
Base-Emitter On Voltage (Note 1)	$V_{BE(ON)}$	$I_C=-2A, V_{CE}=-1V$		-1.6	V
DYNAMIC CHARACTERISTICS					
Current-Gain-Bandwidth Product (Note 2)	f_T	$I_C=-100mA, V_{CE}=-10V, f_{TEST} = 10MHz$	65		MHz
Output Capacitance	C_{OB}	$V_{CB}=-10V, I_E=0, f=0.1MHz$		120	pF


Note: 1. Pulse Test: Pulse Width = 300μs, Duty Cycle ≈ 2%.

2. $f_T = |h_{FE}| \cdot f_{TEST}$.

TYPICAL CHARACTERISTICS

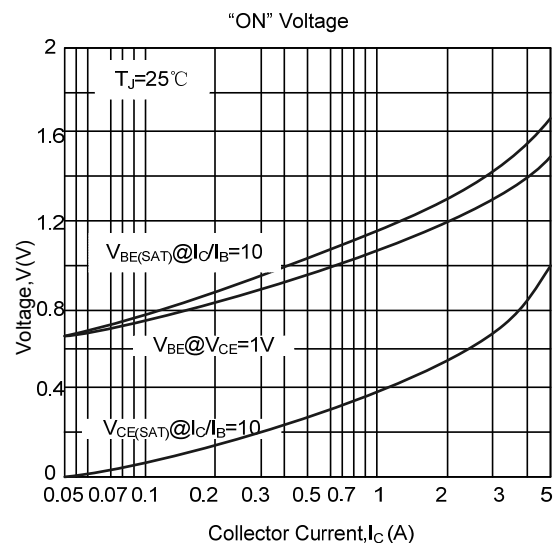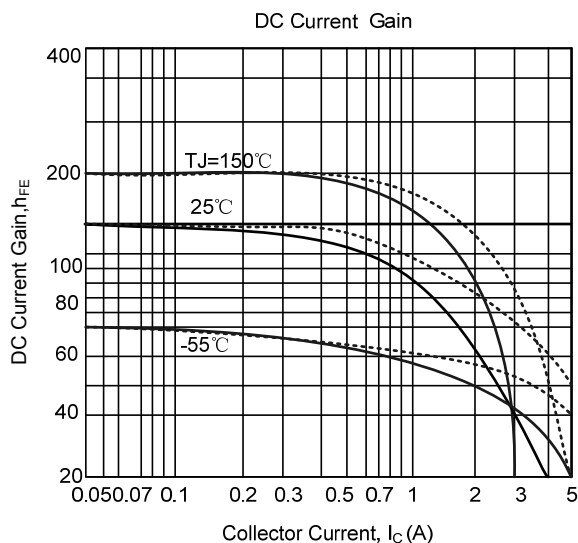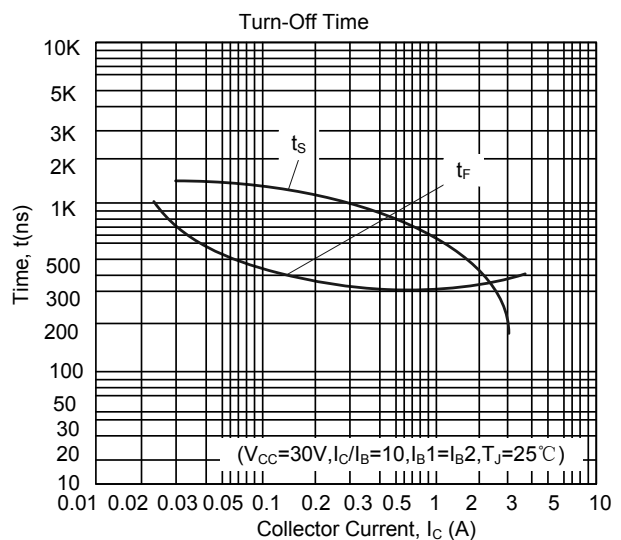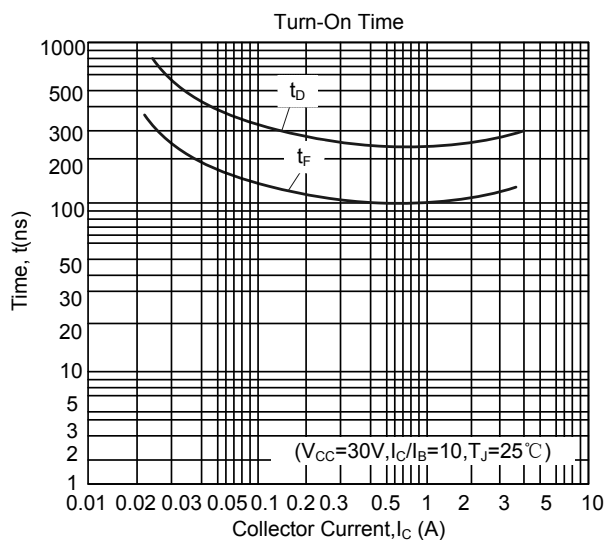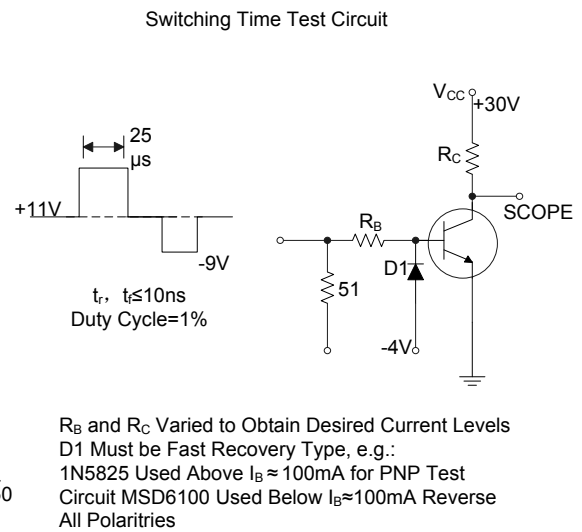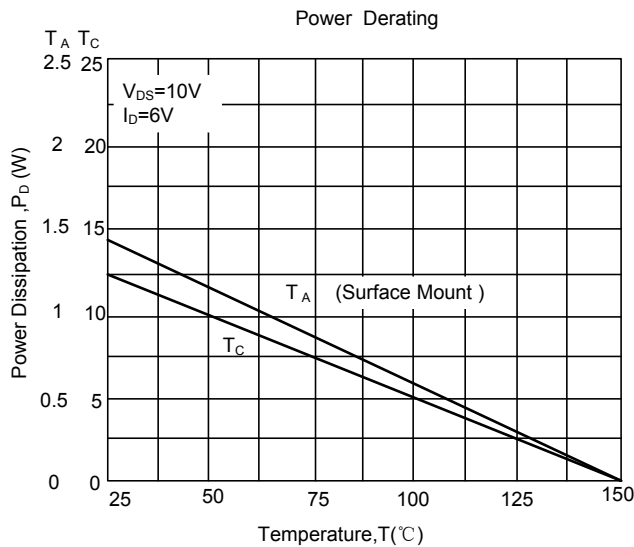

TYPICAL CHARACTERISTICS (Cont.)

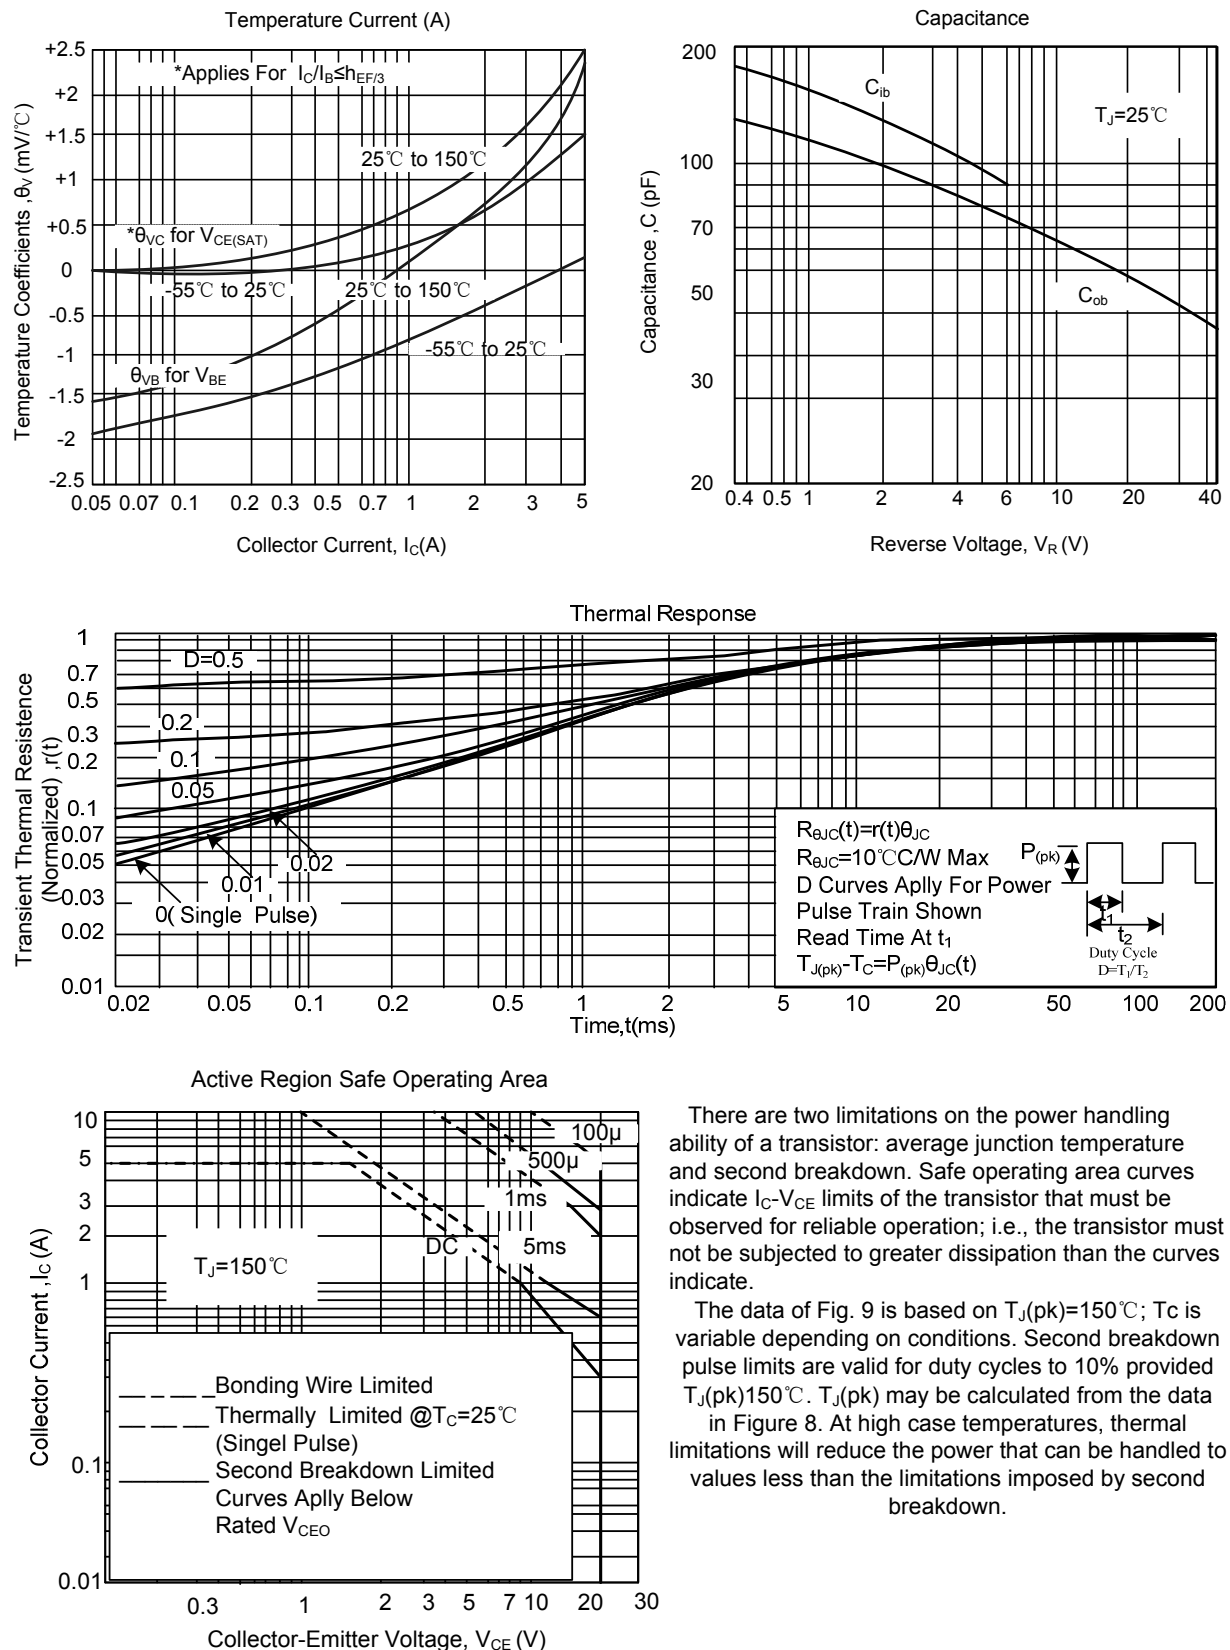

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Fig. 9 is based on $T_{J(pk)} = 150^\circ\text{C}$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} = 150^\circ\text{C}$. $T_{J(pk)}$ may be calculated from the data in Figure 8. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.