


Bright Red MSQC4111C
High Efficiency MSQC4911C
Green MSQC4411C

PACKAGE DIMENSIONS

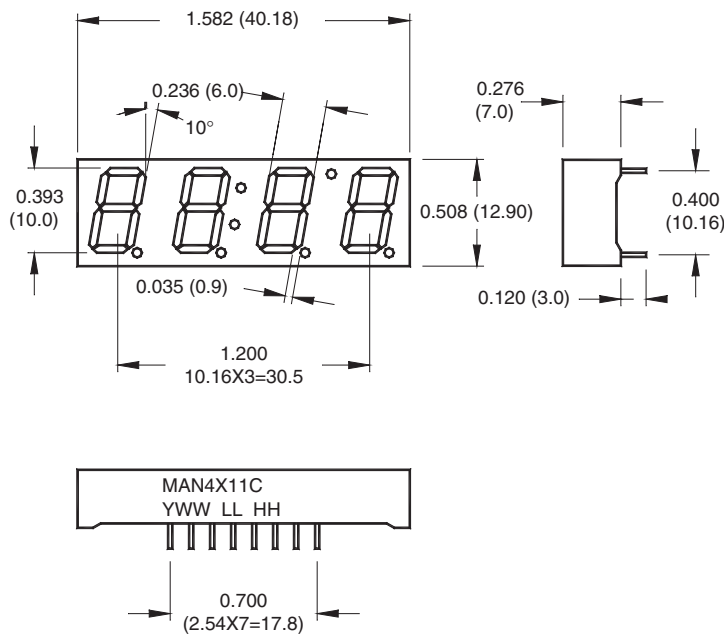

Notes:

- Dimensions are in mm (inches)
- Tolerances are $\pm 0.25\text{mm}$ (0.010") unless otherwise stated.

Features

- Bright bold segments
- Common Anode/Cathode
- Low Power Consumption
- Low Current Capability
- Neutral Segments
- Grey Face
- Epoxy Encapsulated PCB
- High Performance
- High Reliability

Applications

- Appliances
- Automotive
- Instrumentation
- Process control

MODELS AVAILABLE

| Part Number | Color | Description |
|-------------|---------------------|--|
| MSQC4111C | Bright Red | Four Digit, 12/24 hour Clock Display, CA |
| MSQC4411C | Green | Four Digit, 12/24 hour Clock Display, CA |
| MSQC4911C | High Efficiency Red | Four Digit, 12/24 hour Clock Display, CA |

**Bright Red MSQC4111C
High Efficiency MSQC4911C
Green MSQC4411C**

| ABSOLUTE MAXIMUM RATINGS⁽¹⁾ ($T_A = 25^\circ\text{C}$, unless otherwise specified) | | | | |
|--|--|-----------|-----------|-------|
| Part Number Parameter | MSQC4111C | MSQC4411C | MSQC4910C | Units |
| Continuous Forward Current (each segment) | 15 | 25 | 25 | mA |
| Peak Forward Current ($F = 10\text{KHz}$, $D/F = 1/10$) | 60 | 100 | 90 | mA |
| Power Dissipation (P_D) | 40 | 75 | 70 | mW |
| *Derate Linearly from 25°C | 0.17 | 0.33 | 0.33 | mW |
| Reverse Voltage per Die | 5 Volts | | | |
| Operating and Storage Temperature Range | -40°C to $+85^\circ\text{C}$ | | | |
| Lead soldering time (1/16 inch from standoffs) | 5 seconds @ 230°C | | | |


| ELECTRO-OPTICAL CHARACTERISTICS⁽¹⁾ ($T_A = 25^\circ\text{C}$, unless otherwise specified) | | | | | |
|---|---------------|-----------|-----------|----------------|------------------------|
| Part Number Parameter | MSQC4111C | MSQC4411C | MSQC4911C | Units | Test Condition |
| Luminous intensity ⁽²⁾ (I_V) | | | | | |
| Minimum (Standard Current) | 300 | 800 | 800 | μcd | $I_F = 20\text{mA}$ |
| Typical (Standard Current) | 700 | 2000 | 2000 | μcd | $I_F = 20\text{mA}$ |
| Minimum (Low Current) | Not Available | | | | |
| Typical (Low Current) | Not Available | | | | |
| Forward Voltage (V_F) | | | | | |
| Typical (Standard Current) | 2.10 | 2.10 | 2.00 | V | $I_F = 20\text{mA}$ |
| Maximum (Standard Current) | 2.80 | 2.80 | 2.80 | V | $I_F = 20\text{mA}$ |
| Typical (Low Current) | Not Available | | | | |
| Maximum (Low Current) | Not Available | | | | |
| Peak Wavelength | 695 | 570 | 635 | nm | $I_F = 20\text{mA}$ |
| Dominant Wavelength | Not Available | | | | |
| Spectral Line 1/2 Width | 90 | 30 | 45 | nm | $I_F = 10\text{mA}$ |
| Reverse B ⁽³⁾ . Voltage (V_R) | 5 | 5 | 5 | V | $I_R = 100\mu\text{A}$ |

NOTES:


- (1) Data per individual LED element
- (2) Luminous intensity (μcd) = average light output per segment
- (3) B = breakdown

Bright Red MSQC4111C
High Efficiency MSQC4911C
Green MSQC4411C

PIN ORIENTATION, SEGMENT IDENTIFICATION, AND PRODUCT MARKING

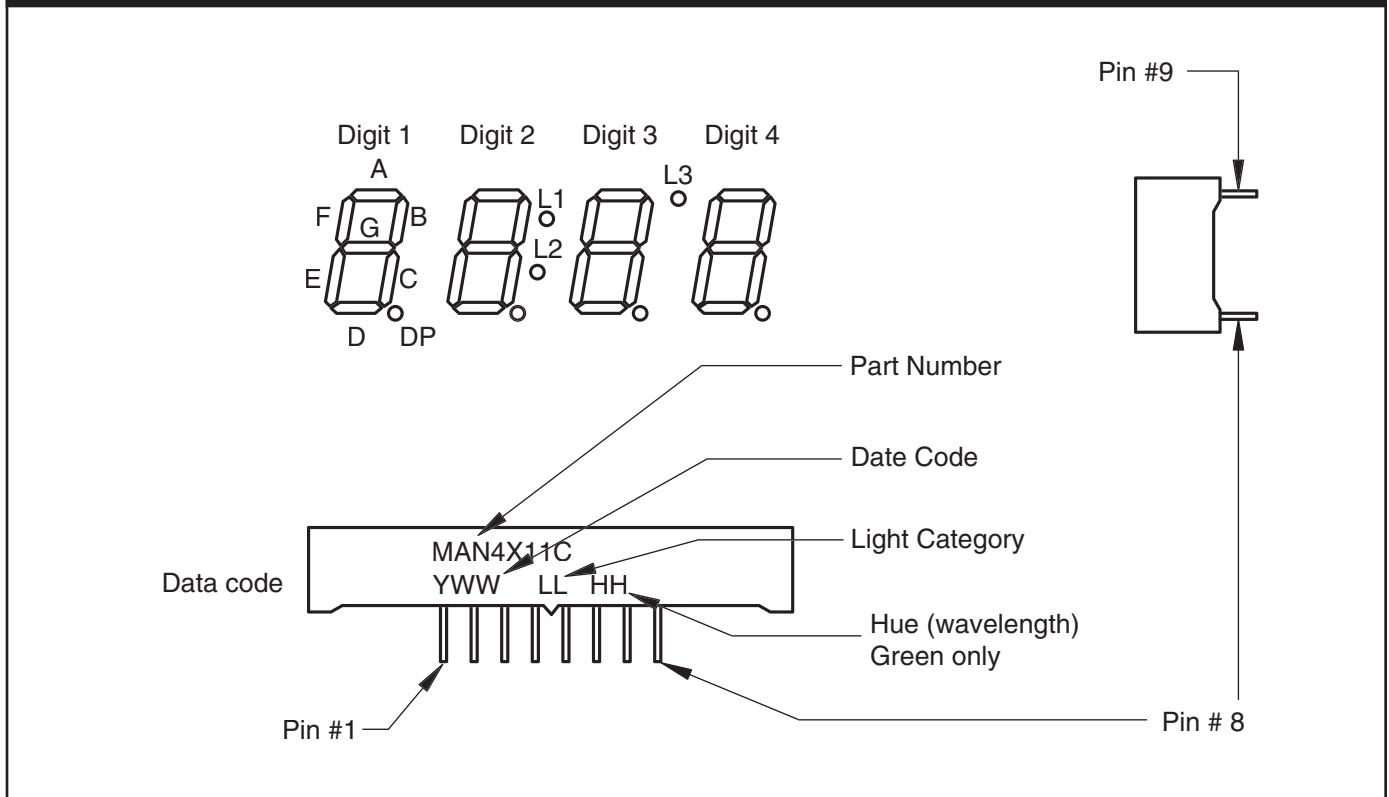

SCHEMATICS

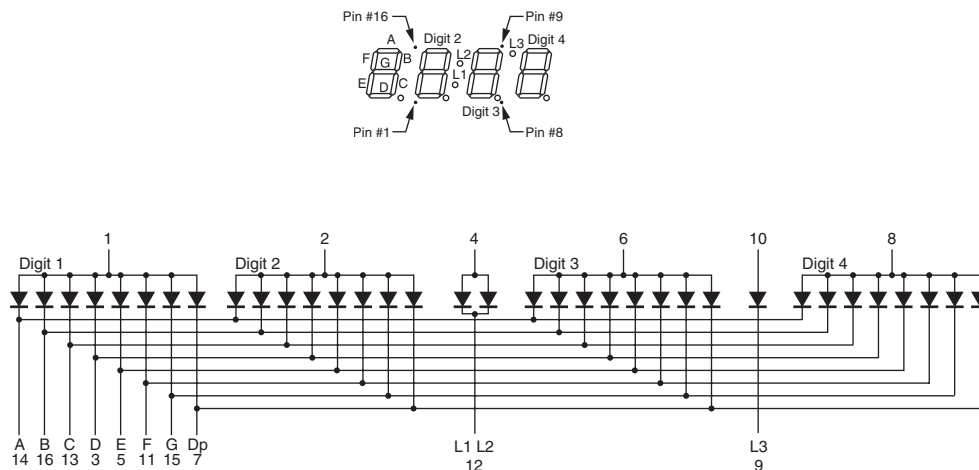

**Bright Red MSQC4111C
High Efficiency MSQC4911C
Green MSQC4411C**

GRAPHICAL DATA Bright Red ($T_A = 25^\circ\text{C}$, unless otherwise specified)

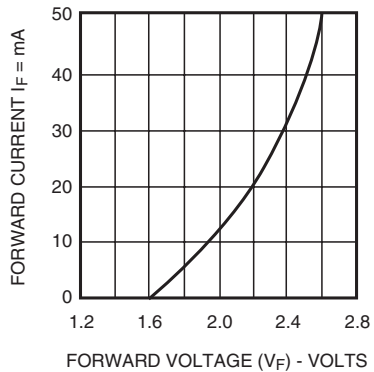


Fig. 1 FORWARD CURRENT VS. FORWARD VOLTAGE

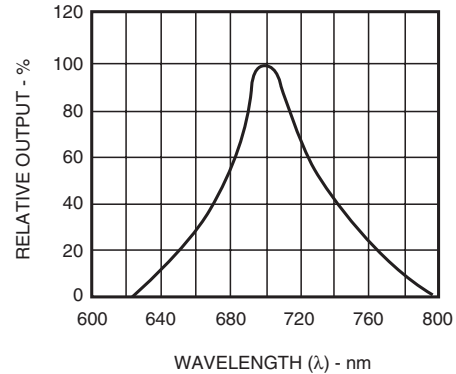


Fig. 2 SPECTRAL RESPONSE

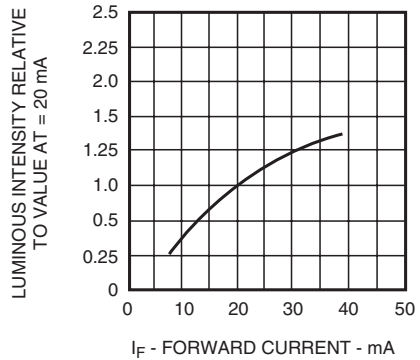


Fig. 3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

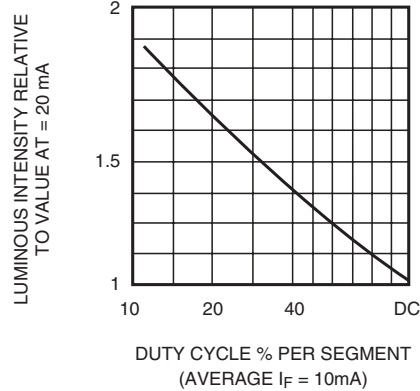


Fig. 5 LUMINOUS INTENSITY VS. DUTY CYCLE

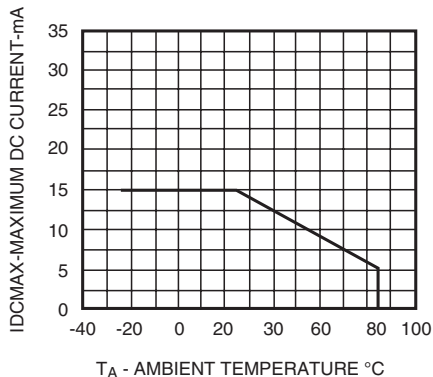


Fig. 4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE

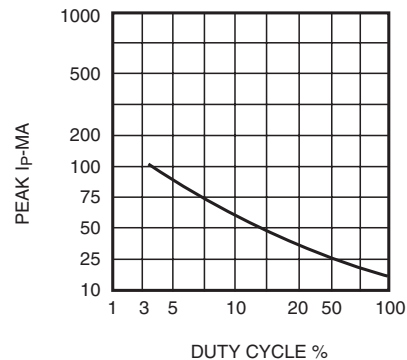


Fig. 6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE $f = 1\text{KHz}$)

**Bright Red MSQC4111C
High Efficiency MSQC4911C
Green MSQC4411C**

GRAPHICAL DATA Green ($T_A = 25^\circ\text{C}$, unless otherwise specified)

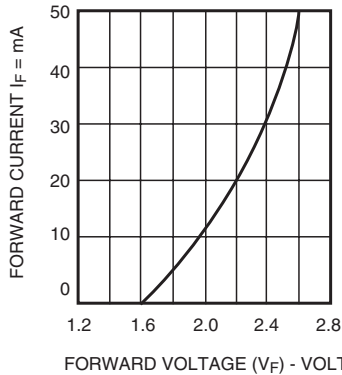


Fig. 1 FORWARD CURRENT VS. FORWARD VOLTAGE

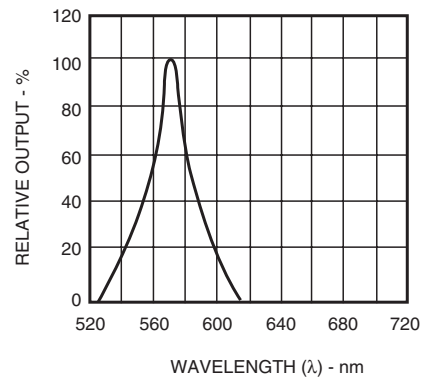


Fig. 2 SPECTRAL RESPONSE

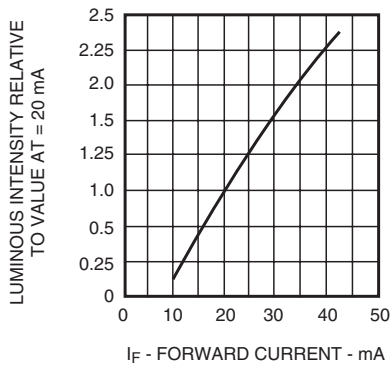


Fig. 3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

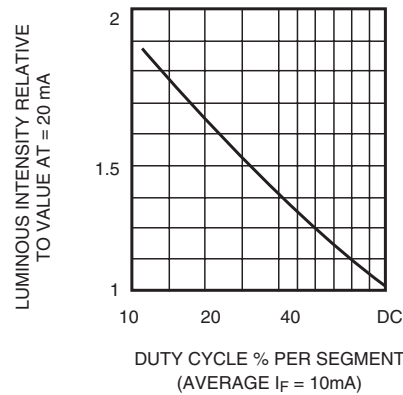


Fig. 5 LUMINOUS INTENSITY VS. DUTY CYCLE

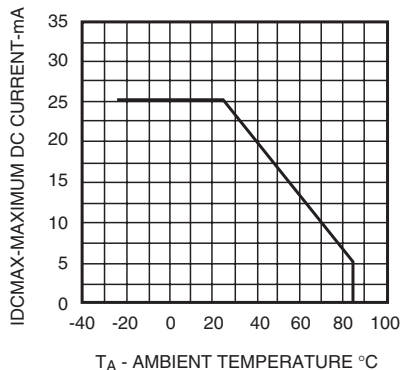


Fig. 4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE

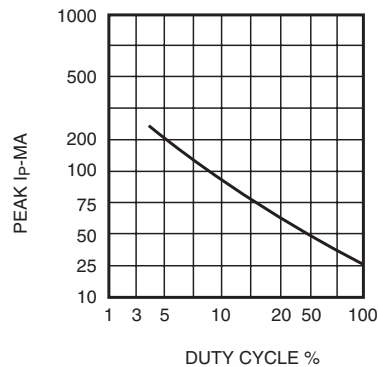


Fig. 6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE $f = 1 \text{ KHz}$)

**Bright Red MSQC4111C
High Efficiency MSQC4911C
Green MSQC4411C**

GRAPHICAL DATA High Efficiency Red ($T_A = 25^\circ\text{C}$, unless otherwise specified)

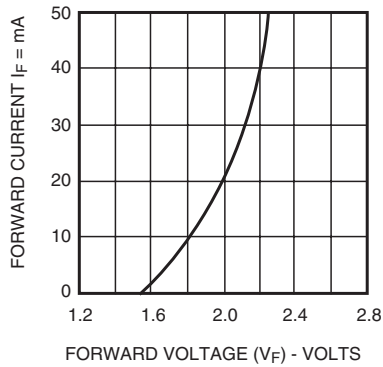


Fig. 1 FORWARD CURRENT VS. FORWARD VOLTAGE

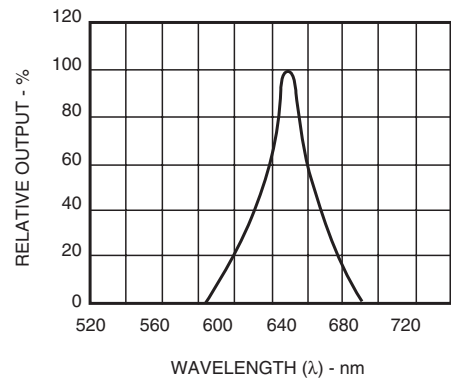


Fig. 2 SPECTRAL RESPONSE

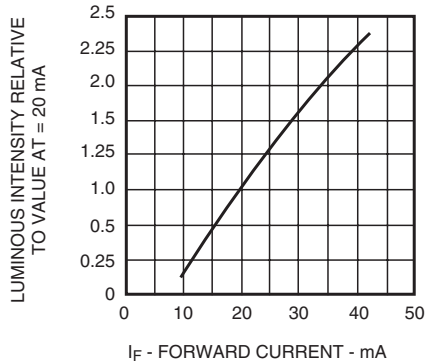


Fig. 3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

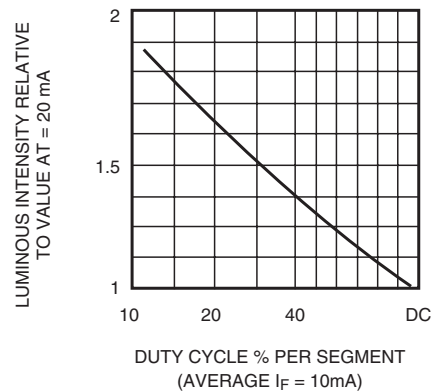


Fig. 5 LUMINOUS INTENSITY VS. DUTY CYCLE

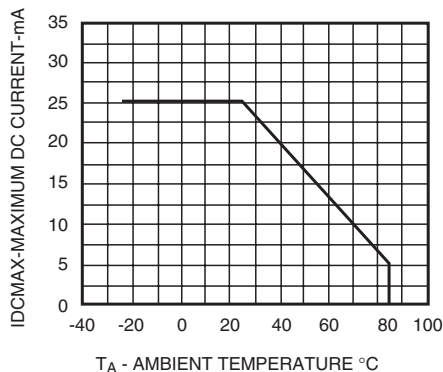


Fig. 4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE

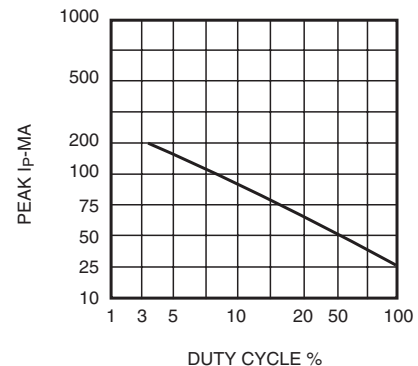


Fig. 6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE $f = 1 \text{ KHz}$)

**Bright Red MSQC4111C
High Efficiency MSQC4911C
Green MSQC4411C**

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.