

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	11	PRELIMINARY	12JUN2019	J.T	K.K

NOTE

- △ HOUSING AND COVER: LCP, UL94-V0, BLACK.
CONTACTS: COPPER ALLOY.
- △ GOLD PLATE ON CONTACT AREA.
TIN PLATE ON SOLDER TAIL AREA.
- △ OA1~OA14 AND OB1~OB14 ARE CONTROLLED SECTION FOR OCP.
- △ APPLICABLE HOST BOARD THICKNESS
- △ OFFSET AMOUNT BETWEEN AIC BOARD AND HOST BOARD CENTER LINE.
- △ SEE MSA SPECIFICATION FOR ADDITIONAL PADDLE CARD LAYOUTS COMPATABLE WITH THIS RECEPTACLE AND FOR OPTIONAL SPLIT CONTACT PAD LAYOUTS FOR THE PADDLE CARD. SPECIFICATION PINOUT MAY ALSO DESIGNATE PAD SEQUENCE DIFFERENT FROM ILLUSTRATION.
- △ POSITIONS DESIGNATED AS "SIGNAL" ARE RECOMMENDED LOCATIONS FOR HIGH SPEED DIFFERENTIAL PAIR SIGNALING.THESE LOCATIONS MAY ALSO BE USED FOR SUPPORTING SIDEBAND SIGNALS OR OTHER UTILITY PURPOSES. POSITIONS DESIGNATED AS "GROUND" ARE REQUIRED WHEN SUPPORTING HIGH SPEED DIFFERENTIAL SIGNALS. THESE LOCATIONS MAY ALSO BE USED FOR SIDEBAND SIGNALS OR OTHER UTILITY PUPOSES.
- △ CONTROLLED ACROSS PADS.
- △ THIS LAYOUT IS ADOPTED IN SFF-TA-1002 Rev 1.1
- △ SCREW IS ENCLOSED BY SEPARATE PACKING.
SCREW SIZE: M2
SCREW LENGTH(REF): 6
HEAD SIZE(REF): ø3.5, 1.3HEIGHT
- △ DATE CODE MARKING.
- △ CONNECTOR MUST BE FIXED ON PCB BY SCREW AFTER SOLDERING.

PLATING	PACKAGING	SCREW INCLUSION	△ DIM A	△ DIM B (HOST BOARD THICKNESS)	PARTS No.
0.76μm Au	SOFT TRAY	YES	0	1.57 ±0.15	2340321-1
		NO	0	1.57 ±0.15	2340321-3
		YES	0.3	1.93 ±0.19	1-2340321-2
		NO	0.3	1.93 ±0.19	1-2340321-4
		YES	0	2.36 ±0.23	2-2340321-1
		NO	0	2.36 ±0.23	2-2340321-3
	HARD TRAY	YES	0	1.57 ±0.15	5-2340321-1
		NO	0	1.57 ±0.15	5-2340321-3
		YES	0.3	1.93 ±0.19	6-2340321-2
		NO	0.3	1.93 ±0.19	6-2340321-4
		YES	0	2.36 ±0.23	7-2340321-1
		NO	0	2.36 ±0.23	7-2340321-3

△△	2	M2 SCREW	
	2	M2 NUT PLATE	△
	4	COVER HOUSING 28P	△
	4	COVER HOUSING 14P	△
	1	HOUSING	△
	168	CONTACT	△
QTY	NAME		ITEM No.


HVM DESIGN

PROPOSAL DRAWING

THIS PRINT IS
PRELIMINARY
UNQUALIFIED PRODUCT.
THESE SPEC MAY BE CHANGED BASED ON
ADDITIONAL INVESTIGATION AND TESTING
WITHOUT YOUR PERMISSION.

AS SHOWN : -1, -3, 1--2, 1--4, 2--1, 2--3, 5--1,
5--3, 6--2, 6--4, 7--1, 7--3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.TANAKA 30JUL2018	 TE Connectivity		
DIMENSIONS: mm		CHK J.TSUJI 30JUL2018			
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.3		APVD K.KOBAYASHI 30JUL2018			
MATERIAL △		FINISH △			
APVD K.KOBAYASHI PRODUCT SPEC		NAME		168 POSITION SLIVER 2.0 STRADDLE MOUNT	
APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
WEIGHT		A2	00779	C-2340321	
CUSTOMER DRAWING			SCALE 4:1	SHEET 1 of 5	REV 11

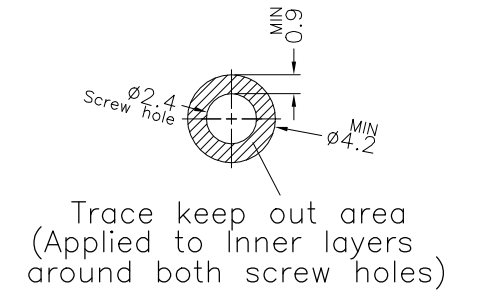



△₄ APPLICABLE THICKNESS




HOST BOARD LAYOUT FOR HVM

THIS PRINT IS
PRELIMINARY
UNQUALIFIED PRODUCT
THESE SPEC MAY BE CHANGED BASED ON
ADDITIONAL INVESTIGATION AND TESTING
WITHOUT YOUR PERMISSION.

THIS DRAWING IS A CONTROLLED DOCUMENT.		 TE Connectivity	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.3	NAME	
	0 PLG ± 1 PLG ± 2 PLG ± 3 PLG ± 4 PLG ± ANGLES ± FINISH	168 POSITION SLIVER 2.0 STRADDLE MOUNT	
MATERIAL	WEIGHT	SIZE	RESTRICTED TO
	0	A2 00779	DRAWING NO C-2340321
CUSTOMER DRAWING		SCALE 4:1	SHEET 2 OF 5 REV 1.1

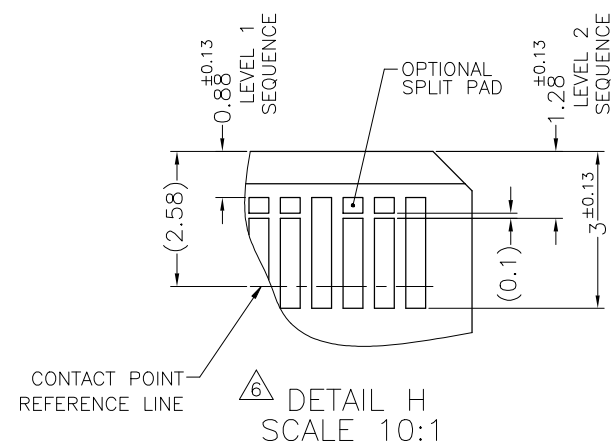

THIS PRINT IS
PRELIMINARY
UNQUALIFIED PRODUCT
THESE SPEC MAY BE CHANGED BASED ON
ADDITIONAL INVESTIGATION AND TESTING
WITHOUT YOUR PERMISSION.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity					
		CHK							
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME 168 POSITION SLIVER 2.0 STRADDLE MOUNT					
mm		±0.3							
		APVD				SIZE A2			
		PRODUCT SPEC						CAGE CODE 00779	
		APPLICATION SPEC		DRAWING NO C=2340321					
		WEIGHT							
MATERIAL		SCALE 4:1							
FINISH		SHEET 3 of 5							
				REV 11					
		CUSTOMER DRAWING							

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT — TE Connectivity

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

CONNECTOR CONTACT IDENTIFICATION

CONTACT NUMBER

SIDE A

SIDE B

1	GROUND	GROUND
2	SIGNAL	SIGNAL
3	SIGNAL	SIGNAL
4	GROUND	GROUND
5	SIGNAL	SIGNAL
6	SIGNAL	SIGNAL
7	GROUND	GROUND
8	SIGNAL	SIGNAL
9	SIGNAL	SIGNAL
10	GROUND	GROUND
11	SIGNAL	SIGNAL
12	SIGNAL	SIGNAL
13	GROUND	GROUND
14	SIGNAL	SIGNAL
15	SIGNAL	SIGNAL
16	GROUND	GROUND
17	SIGNAL	SIGNAL
18	SIGNAL	SIGNAL
19	GROUND	GROUND
20	SIGNAL	SIGNAL
21	SIGNAL	SIGNAL
22	GROUND	GROUND
23	SIGNAL	SIGNAL
24	SIGNAL	SIGNAL
25	GROUND	GROUND
26	SIGNAL	SIGNAL
27	SIGNAL	SIGNAL
28	GROUND	GROUND
29	GROUND	GROUND
30	SIGNAL	SIGNAL
31	SIGNAL	SIGNAL
32	GROUND	GROUND
33	SIGNAL	SIGNAL
34	SIGNAL	SIGNAL
35	GROUND	GROUND

CONTACT NUMBER

SIDE A

SIDE B

36	SIGNAL	SIGNAL
37	SIGNAL	SIGNAL
38	GROUND	GROUND
39	SIGNAL	SIGNAL
40	SIGNAL	SIGNAL
41	GROUND	GROUND
42	GROUND	GROUND
43	GROUND	GROUND
44	SIGNAL	SIGNAL
45	SIGNAL	SIGNAL
46	GROUND	GROUND
47	SIGNAL	SIGNAL
48	SIGNAL	SIGNAL
49	GROUND	GROUND
50	SIGNAL	SIGNAL
51	SIGNAL	SIGNAL
52	GROUND	GROUND
53	SIGNAL	SIGNAL
54	SIGNAL	SIGNAL
55	GROUND	GROUND
56	SIGNAL	SIGNAL
57	SIGNAL	SIGNAL
58	GROUND	GROUND
59	SIGNAL	SIGNAL
60	SIGNAL	SIGNAL
61	GROUND	GROUND
62	SIGNAL	SIGNAL
63	SIGNAL	SIGNAL
64	GROUND	GROUND
65	SIGNAL	SIGNAL
66	SIGNAL	SIGNAL
67	GROUND	GROUND
68	SIGNAL	SIGNAL
69	SIGNAL	SIGNAL
70	GROUND	GROUND

CONTACT NUMBER

SIDE A

SIDE B

O 1	GROUND	GROUND
O 2	SIGNAL	SIGNAL
O 3	SIGNAL	SIGNAL
O 4	GROUND	GROUND
O 5	SIGNAL	SIGNAL
O 6	SIGNAL	SIGNAL
O 7	GROUND	GROUND
O 8	SIGNAL	SIGNAL
O 9	SIGNAL	SIGNAL
O 10	GROUND	GROUND
O 11	SIGNAL	SIGNAL
O 12	SIGNAL	SIGNAL
O 13	GROUND	GROUND
O 14	GROUND	GROUND

3 OCP CONTROLLED AREA

PROPOSAL DRAWING

THIS PRINT IS PRELIMINARY
UNQUALIFIED PRODUCT
THESE SPEC MAY BE CHANGED BASED ON
ADDITIONAL INVESTIGATION AND TESTING
WITHOUT YOUR PERMISSION.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

TOLERANCES, UNLESS OTHERWISE SPECIFIED:

0 PLC ± —

1 PLC ± —

2 PLC ± —

3 PLC ± —

4 PLC ± —

ANGLES ± —

FINISH

DWN —

CHK —

APVD —

PRODUCT SPEC —

APPLICATION SPEC —

WEIGHT 0

TE Connectivity

NAME

168 POSITION
SLIVER 2.0 STRADDLE MOUNT

SIZE A2 CAGE CODE 00779 DRAWING NO C-2340321

CUSTOMER DRAWING

RESTRICTED TO

SCALE 1:1 SHEET 4 of 5 REV 11

2340321

1471-9 (1/15)

1471-9 (1/15)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.