


# CGHV1J025D

**25 W, 18.0 GHz, GaN HEMT Die**

Cree's CGHV1J025D is a high voltage gallium nitride (GaN) High Electron Mobility Transistor (HEMT) on a silicon carbide substrate, using a 0.25  $\mu\text{m}$  gate length fabrication process. This GaN-on-SiC product offers superior high frequency, high efficiency features. It is ideal for a variety of applications operating from 10 MHz to 18 GHz at 40 V with a high breakdown voltage.

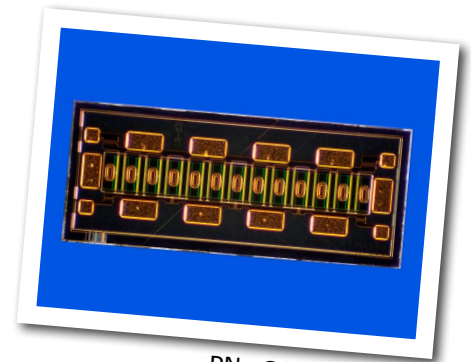

PN: CGHV1J025D

## FEATURES


- 17 dB Typ. Small Signal Gain at 10 GHz
- 60% Typ. PAE at 10 GHz
- 25 W Typical Psat
- 40 V Operation
- Up to 18GHz Operation

## APPLICATIONS

- Satellite Communications
- PTP Communications Links
- Marine Radar
- Pleasure Craft Radar
- Port Vessel Traffic Services
- Broadband Amplifiers
- High Efficiency Amplifiers

## Packaging Information

- Bare die are shipped in Gel-Pak® containers or on tape.
- Non-adhesive tacky membrane immobilizes die during shipment.

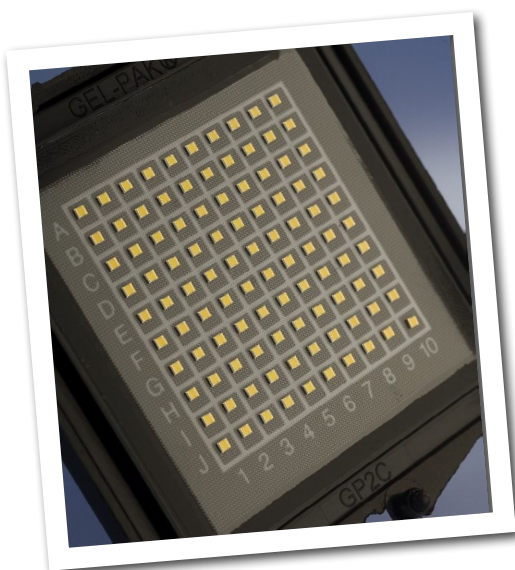

Large Signal Models Available for SiC & GaN

## Absolute Maximum Ratings (not simultaneous)

Parameter	Symbol	Rating	Units	Conditions
Drain-source Voltage	$V_{DS}$	100	$V_{DC}$	25°C
Gate-source Voltage	$V_{GS}$	-10, +2	$V_{DC}$	25°C
Storage Temperature	$T_{STG}$	-65, +150	°C	
Operating Junction Temperature	$T_J$	225	°C	
Maximum Forward Gate Current	$I_{GMAX}$	4.8	mA	25°C
Maximum Drain Current <sup>1</sup>	$I_{DMAX}$	2.0	A	25°C
Thermal Resistance, Junction to Case (packaged) <sup>2</sup>	$R_{\theta JC}$	5.83	°C/W	85°C
Thermal Resistance, Junction to Case (die only) <sup>2</sup>	$R_{\theta JC}$	3.91	°C/W	85°C
Mounting Temperature	$T_S$	320	°C	30 seconds

Note<sup>1</sup> Current limit for long term reliable operation.

Note<sup>2</sup> Eutectic die attach using 0.5 mil thick 80/20 AuSn mounted to a 40 mil thick CMC carrier. Bottom of the CMC carrier fixed at 85°C and is at 19.2 W dissipated power.

## Electrical Characteristics (Frequency = 10 GHz unless otherwise stated; $T_c = 25^\circ\text{C}$ )

Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
<b>DC Characteristics</b>						
Gate Threshold Voltage	$V_{(GS)TH}$	-3.8	-3.0	-2.3	V	$V_{DS} = 10\text{ V}, I_D = 4.8\text{ mA}$
Gate Quiescent Voltage	$V_{(GS)Q}$	-	-2.7	-	VDC	$V_{DD} = 40\text{ V}, I_{DQ} = 240\text{ mA}$
Saturated Drain Current <sup>1</sup>	$I_{SAT}$	3.8	4.3	-	A	$V_{DS} = 6.0\text{ V}, V_{GS} = 2.0\text{ V}$
Drain-Source Breakdown Voltage	$V_{BD}$	100	-	-	V	$V_{GS} = -8\text{ V}, I_D = 4.8\text{ mA}$
On Resistance	$R_{ON}$	-	0.6	-	$\Omega$	$V_{DS} = 0.1\text{ V}, V_{GS} = 0\text{ V}$
Gate Forward Voltage	$V_{G-ON}$	-	1.85	-	V	$I_{GS} = 4.8\text{ mA}$
<b>RF Characteristics</b>						
Small Signal Gain	$G_{SS}$	-	17	-	dB	$V_{DD} = 40\text{ V}, I_{DQ} = 240\text{ mA}$
Saturated Power Output <sup>1</sup>	$P_{SAT}$	-	25	-	W	$V_{DD} = 40\text{ V}, I_{DQ} = 240\text{ mA}$
Drain Efficiency <sup>2</sup>	$\eta$	-	60	-	%	$V_{DD} = 40\text{ V}, I_{DQ} = 240\text{ mA}$
Intermodulation Distortion	IM3	-	-30	-	dBc	$V_{DD} = 40\text{ V}, I_{DQ} = 240\text{ mA}, P_{OUT} = 25\text{ W PEP}$
Output Mismatch Stress	VSWR	-	-	10 : 1	$\Psi$	No damage at all phase angles, $V_{DD} = 40\text{ V}, I_{DQ} = 240\text{ mA},$ $P_{OUT} = 25\text{ W CW}$
<b>Dynamic Characteristics</b>						
Input Capacitance	$C_{GS}$	-	5.1	-	pF	$V_{DS} = 40\text{ V}, V_{gs} = -8\text{ V}, f = 1\text{ MHz}$
Output Capacitance	$C_{DS}$	-	1.2	-	pF	$V_{DS} = 40\text{ V}, V_{gs} = -8\text{ V}, f = 1\text{ MHz}$
Feedback Capacitance	$C_{GD}$	-	0.16	-	pF	$V_{DS} = 40\text{ V}, V_{gs} = -8\text{ V}, f = 1\text{ MHz}$


Notes:

<sup>1</sup> Scaled from PCM unit cell.

<sup>1</sup>  $P_{SAT}$  is defined as  $I_G = 0.48\text{ mA}$ .

<sup>2</sup> Drain Efficiency =  $P_{OUT} / P_{DC}$

## Die Dimensions (units in microns)

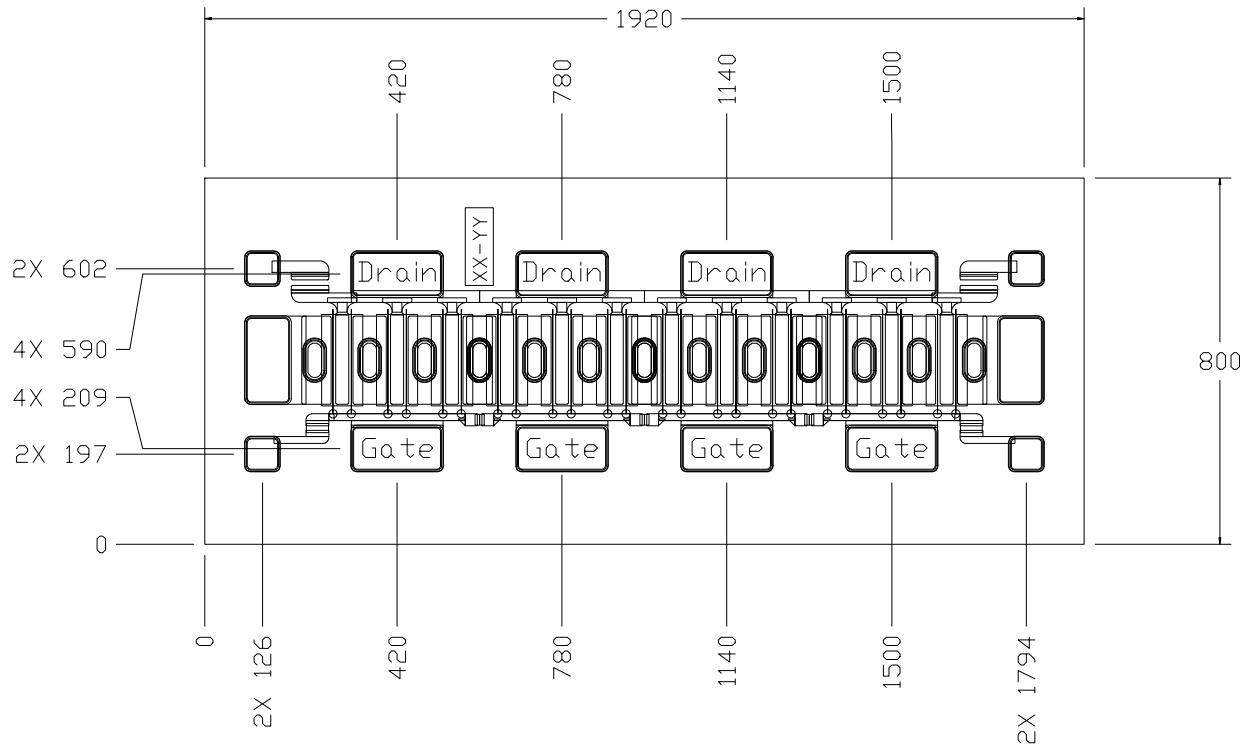

Overall die size 800 x 1920 (+0/-50) microns, die thickness 100 (+/-10) microns.  
All Gate and Drain pads must be wire bonded for electrical connection.

Pad	Size (microns)
Drain	200 x 100
Gate	200 x 100
Interconnect	80 x 80


### Assembly Notes:

- Recommended solder is AuSn (80/20) solder. Refer to Cree's website for the Eutectic Die Bond Procedure application note at [http://www.cree.com/products/wireless\\_documents.asp](http://www.cree.com/products/wireless_documents.asp)
- Vacuum collet is the preferred method of pick-up.
- The backside of the die is the Source (ground) contact.
- Die back side gold plating is 5 microns thick minimum.
- Thermosonic ball or wedge bonding are the preferred connection methods.
- Gold wire must be used for connections.
- Use the die label (XX-YY) for correct orientation.

## Gmax and K Factor


**Figure 1. CGHV1J025D - Stability with Gmax and K Factor**

$V_{DD} = 40\text{ V}, I_{DS} = 120\text{ mA}$

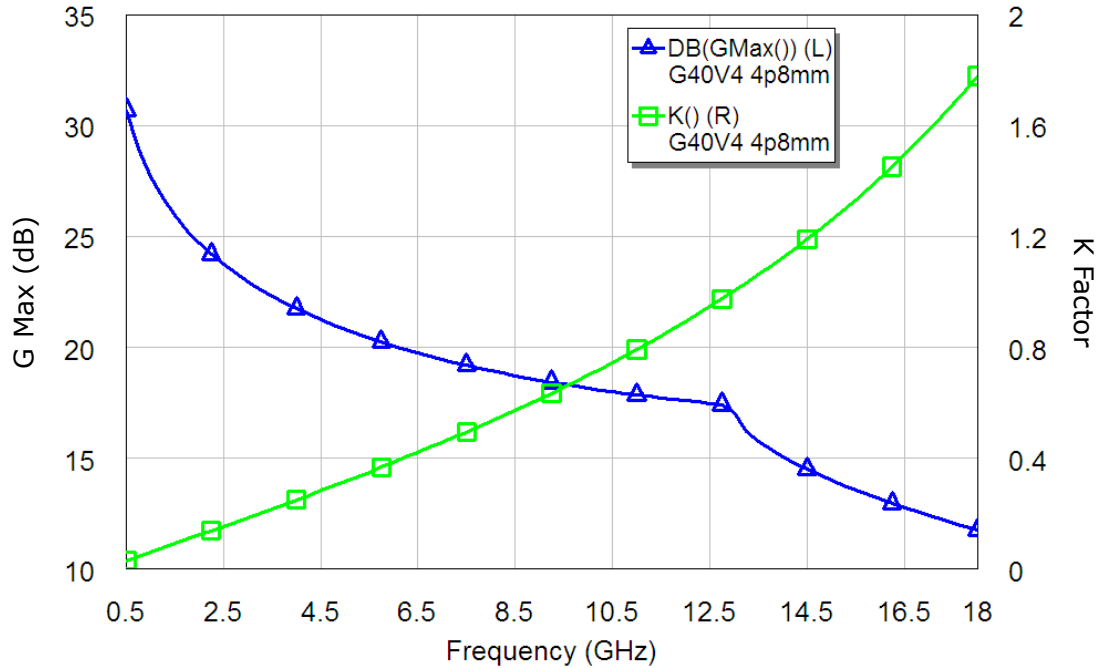

**Figure 2. CGHV1J025D - Stability with Gmax and K Factor**

$V_{DD} = 40\text{ V}, I_{DS} = 240\text{ mA}$

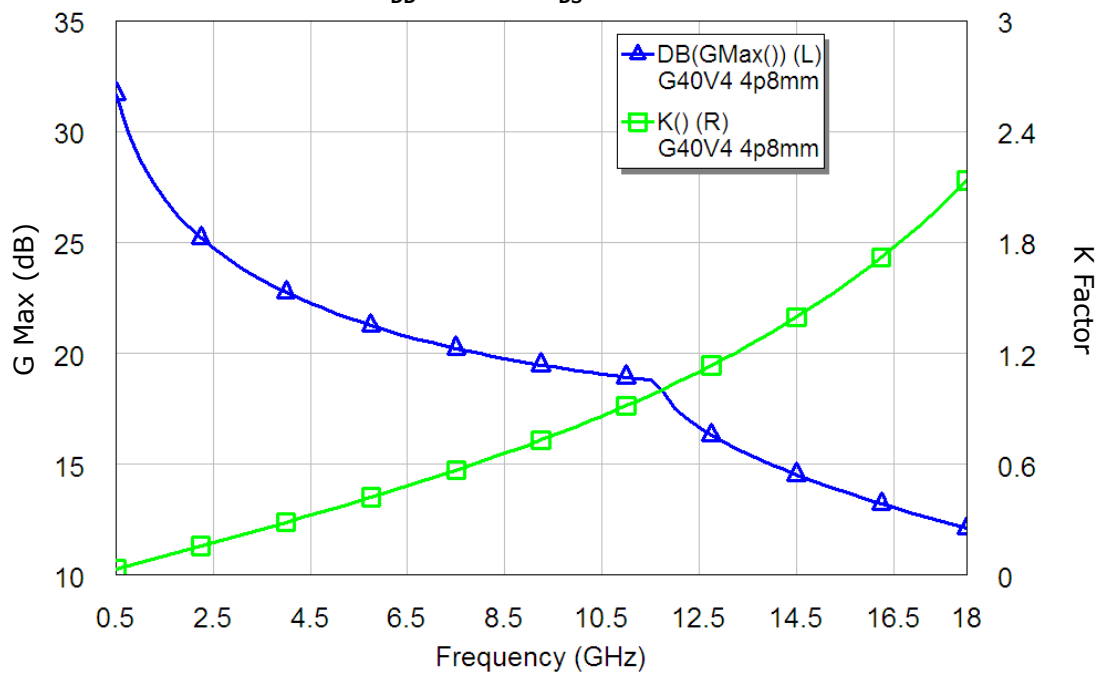


## Source and Load Impedances

Frequency (GHz)	Source Impedance (ohms)	Load Impedance (ohms)	Series Gate Stability Resistor (ohms)
1.0	8.1 + j10.8	31.4 + j24.75	7.00
2.0	3.9 + j5.43	17.6 + j23.4	3.30
3.0	2.35 + j3.48	9.57 + j19.67	2.05
4.0	1.81 + j2.49	6.52 + j16.94	1.40
5.0	1.47 + j1.67	4.22 + j14.57	0.95
6.0	1.36 + j1.365	3.73 + j12.4	0.70
7.0	1.377 + j0.97	3.06 + j10.82	0.525
8.0	1.32 + j0.6	2.47 + j9.6	0.425
9.0	1.16 + j0.32	2.22 + j8.53	0.275
10.0	0.957 + j0.07	2.1 + j7.67	0.175
11.0	1 + j0.01	1.94 + j6.96	0.10
12.0	0.548 + j0.01	1.87 + j6.186	0.025
13.0	76 + j0	1.6 + j5.63	0
14.0	0.69 - j0.34	1.4 + j5.1	0
15.0	0.437 - j0.78	1.22 + j4.68	0
16.0	0.44 - j0.99	1.07 + j4.25	0
17.0	0.416 - j1.23	0.97 + j3.81	0
18.0	0.45 - j1.434	0.87 + j3.47	0

**Table 1.**

**Note:**  $V_{DD} = 40\text{ V}$ ,  $I_{DQ} = 178\text{ mA}$ .

**Figure 3. CGHV1J025D - Power Gain, Output Power and Drain Efficiency using Source and Load Pull Impedances (Series gate stability resistor values chosen to make  $K > 1$ )**

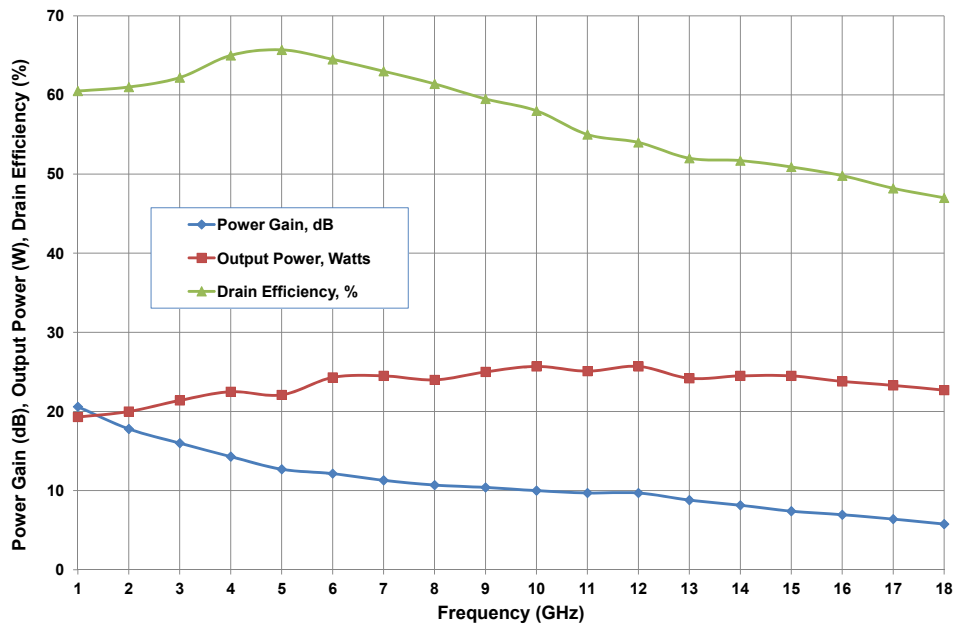



**Typical S-Parameters for CGHV1J025D**  
 (Small Signal,  $V_{DS} = 40\text{ V}$ ,  $I_{DQ} = 120\text{ mA}$ , angle in degrees)

Frequency	Mag S11	Ang S11	Mag S21	Ang S21	Mag S12	Ang S12	Mag S22	Ang S22
500 MHz	0.928	-124.66	23.24	109.88	0.020	20.43	0.360	-95.71
1.00 GHz	0.918	-150.14	12.40	91.05	0.021	2.17	0.361	-115.87
1.50 GHz	0.919	-159.38	8.19	80.38	0.021	-7.95	0.408	-122.40
2.00 GHz	0.922	-164.05	5.98	72.24	0.020	-15.53	0.466	-126.33
2.50 GHz	0.927	-166.89	4.61	65.39	0.020	-21.82	0.524	-129.70
3.00 GHz	0.932	-168.83	3.68	59.40	0.019	-27.25	0.579	-132.87
3.50 GHz	0.937	-170.28	3.01	54.08	0.018	-32.00	0.628	-135.88
4.00 GHz	0.942	-171.43	2.51	49.32	0.017	-36.21	0.671	-138.72
4.50 GHz	0.946	-172.38	2.12	45.03	0.016	-39.94	0.708	-141.37
5.00 GHz	0.950	-173.20	1.82	41.14	0.015	-43.26	0.741	-143.82
5.50 GHz	0.954	-173.92	1.57	37.61	0.014	-46.22	0.769	-146.08
6.00 GHz	0.957	-174.57	1.37	34.39	0.013	-48.87	0.793	-148.15
6.50 GHz	0.960	-175.16	1.20	31.45	0.013	-51.25	0.814	-150.06
7.00 GHz	0.962	-175.70	1.07	28.73	0.012	-53.39	0.832	-151.80
7.50 GHz	0.965	-176.19	0.95	26.23	0.011	-55.32	0.847	-153.41
8.00 GHz	0.966	-176.66	0.85	23.91	0.011	-57.07	0.861	-154.89
8.50 GHz	0.968	-177.10	0.77	21.74	0.010	-58.65	0.873	-156.25
9.00 GHz	0.970	-177.51	0.70	19.72	0.010	-60.09	0.883	-157.51
9.50 GHz	0.971	-177.90	0.63	17.83	0.009	-61.40	0.892	-158.68
10.00 GHz	0.972	-178.27	0.58	16.04	0.009	-62.59	0.900	-159.77
10.50 GHz	0.973	-178.63	0.53	14.36	0.008	-63.68	0.907	-160.78
11.00 GHz	0.974	-178.97	0.49	12.76	0.008	-64.67	0.914	-161.72
11.50 GHz	0.975	-179.30	0.45	11.25	0.008	-65.58	0.919	-162.61
12.00 GHz	0.976	-179.61	0.42	9.80	0.007	-66.42	0.924	-163.44
12.50 GHz	0.976	-179.92	0.39	8.42	0.007	-67.18	0.929	-164.22
13.00 GHz	0.977	179.78	0.36	7.10	0.007	-67.87	0.933	-164.96
13.50 GHz	0.977	179.49	0.34	5.83	0.006	-68.51	0.937	-165.65
14.00 GHz	0.978	179.21	0.32	4.61	0.006	-69.08	0.940	-166.31
14.50 GHz	0.978	178.93	0.30	3.44	0.006	-69.60	0.943	-166.94
15.00 GHz	0.979	178.66	0.28	2.30	0.006	-70.07	0.946	-167.53
15.25 GHz	0.979	178.53	0.27	1.75	0.005	-70.29	0.947	-167.82
15.50 GHz	0.979	178.40	0.26	1.20	0.005	-70.49	0.948	-168.10
15.75 GHz	0.979	178.26	0.26	0.67	0.005	-70.68	0.949	-168.37
16.00 GHz	0.979	178.13	0.25	0.14	0.005	-70.86	0.951	-168.64
16.25 GHz	0.979	178.00	0.24	-0.38	0.005	-71.03	0.952	-168.90
16.50 GHz	0.980	177.88	0.24	-0.89	0.005	-71.19	0.953	-169.16
16.75 GHz	0.980	177.75	0.23	-1.40	0.005	-71.33	0.954	-169.41
17.00 GHz	0.980	177.62	0.22	-1.89	0.005	-71.46	0.955	-169.65
17.25 GHz	0.980	177.50	0.22	-2.39	0.004	-71.58	0.955	-169.89
17.50 GHz	0.980	177.37	0.21	-2.87	0.004	-71.69	0.956	-170.13
17.75 GHz	0.980	177.25	0.21	-3.35	0.004	-71.78	0.957	-170.36
18.00 GHz	0.980	177.13	0.20	-3.82	0.004	-71.87	0.958	-170.58

To download the s-parameters in s2p format, go to the [CGHV1J025D Product Page](#) and click on the documentation tab.




**Typical S-Parameters for CGHV1J025D**  
**(Small Signal,  $V_{DS} = 40\text{ V}$ ,  $I_{DQ} = 240\text{ mA}$ , angle in degrees)**

Frequency	Mag S11	Ang S11	Mag S21	Ang S21	Mag S12	Ang S12	Mag S22	Ang S22
500 MHz	0.936	-131.40	24.37	107.30	0.017	17.88	0.330	-112.72
1.00 GHz	0.928	-154.25	12.80	90.22	0.017	1.38	0.350	-128.83
1.50 GHz	0.929	-162.37	8.46	80.49	0.017	-7.76	0.396	-132.36
2.00 GHz	0.932	-166.47	6.19	72.98	0.017	-14.68	0.450	-134.10
2.50 GHz	0.935	-168.95	4.80	66.58	0.016	-20.49	0.504	-135.82
3.00 GHz	0.939	-170.65	3.85	60.92	0.015	-25.56	0.556	-137.73
3.50 GHz	0.943	-171.91	3.17	55.83	0.015	-30.06	0.603	-139.77
4.00 GHz	0.947	-172.91	2.65	51.23	0.014	-34.07	0.646	-141.86
4.50 GHz	0.950	-173.73	2.25	47.04	0.013	-37.67	0.684	-143.92
5.00 GHz	0.954	-174.45	1.93	43.22	0.013	-40.89	0.717	-145.91
5.50 GHz	0.957	-175.07	1.68	39.72	0.012	-43.79	0.746	-147.80
6.00 GHz	0.959	-175.64	1.47	36.51	0.011	-46.40	0.771	-149.58
6.50 GHz	0.962	-176.15	1.30	33.55	0.011	-48.75	0.793	-151.25
7.00 GHz	0.964	-176.63	1.15	30.82	0.010	-50.87	0.812	-152.81
7.50 GHz	0.966	-177.07	1.03	28.29	0.010	-52.79	0.829	-154.26
8.00 GHz	0.968	-177.48	0.92	25.93	0.009	-54.53	0.844	-155.62
8.50 GHz	0.969	-177.87	0.83	23.73	0.009	-56.11	0.857	-156.88
9.00 GHz	0.970	-178.25	0.76	21.67	0.008	-57.54	0.868	-158.05
9.50 GHz	0.972	-178.60	0.69	19.74	0.008	-58.84	0.878	-159.15
10.00 GHz	0.973	-178.94	0.63	17.91	0.008	-60.02	0.887	-160.17
10.50 GHz	0.974	-179.27	0.58	16.19	0.007	-61.10	0.895	-161.13
11.00 GHz	0.975	-179.58	0.54	14.55	0.007	-62.07	0.902	-162.04
11.50 GHz	0.975	-179.88	0.49	13.00	0.007	-62.96	0.909	-162.88
12.00 GHz	0.976	179.82	0.46	11.52	0.006	-63.76	0.914	-163.68
12.50 GHz	0.977	179.54	0.43	10.10	0.006	-64.49	0.919	-164.43
13.00 GHz	0.977	179.26	0.40	8.74	0.006	-65.14	0.924	-165.15
13.50 GHz	0.978	178.99	0.37	7.44	0.005	-65.72	0.928	-165.82
14.00 GHz	0.978	178.72	0.35	6.19	0.005	-66.24	0.932	-166.46
14.50 GHz	0.978	178.46	0.33	4.98	0.005	-66.70	0.936	-167.07
15.00 GHz	0.979	178.20	0.31	3.82	0.005	-67.09	0.939	-167.65
15.25 GHz	0.979	178.08	0.30	3.25	0.005	-67.26	0.940	-167.93
15.50 GHz	0.979	177.95	0.29	2.69	0.004	-67.42	0.942	-168.21
15.75 GHz	0.979	177.82	0.28	2.15	0.004	-67.57	0.943	-168.47
16.00 GHz	0.979	177.70	0.28	1.60	0.004	-67.69	0.944	-168.74
16.25 GHz	0.980	177.58	0.27	1.07	0.004	-67.81	0.945	-168.99
16.50 GHz	0.980	177.45	0.26	0.55	0.004	-67.90	0.947	-169.24
16.75 GHz	0.980	177.33	0.25	0.03	0.004	-67.99	0.948	-169.49
17.00 GHz	0.980	177.21	0.25	-0.48	0.004	-68.05	0.949	-169.73
17.25 GHz	0.980	177.09	0.24	-0.98	0.004	-68.10	0.950	-169.97
17.50 GHz	0.980	176.97	0.23	-1.48	0.004	-68.14	0.951	-170.20
17.75 GHz	0.980	176.85	0.23	-1.97	0.004	-68.15	0.952	-170.43
18.00 GHz	0.980	176.73	0.22	-2.45	0.003	-68.15	0.953	-170.65

To download the s-parameters in s2p format, go to the [CGHV1J025D Product Page](#) and click on the documentation tab.

## Part Number System

# CGHV1J025D

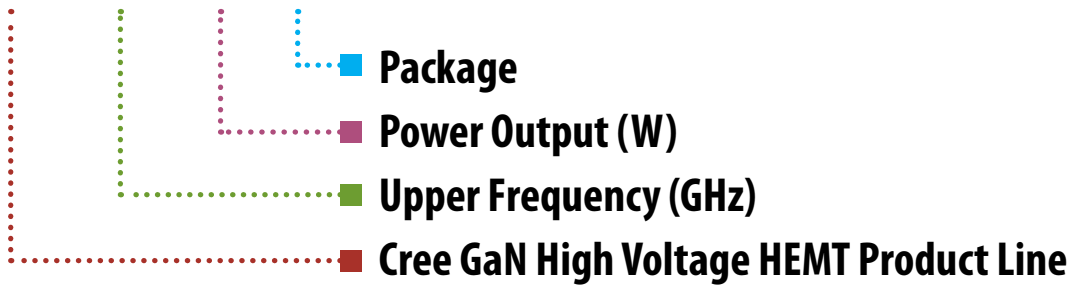

Parameter	Value	Units
Lower Frequency	DC	GHz
Upper Frequency <sup>1</sup>	18.0	GHz
Power Output	25	W
Package	Bare Die	-

**Table 1.**

**Note<sup>1</sup>:** Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value.

Character Code	Code Value
A	0
B	1
C	2
D	3
E	4
F	5
G	6
H	7
J	8
K	9
Examples:	1A = 10.0 GHz 2H = 27.0 GHz

**Table 2.**



## Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for its use or for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications, and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended, or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death, or in applications for the planning, construction, maintenance or direct operation of a nuclear facility. CREE and the CREE logo are registered trademarks of Cree, Inc.

For more information, please contact:

Cree, Inc.  
4600 Silicon Drive  
Durham, North Carolina, USA 27703  
[www.cree.com/wireless](http://www.cree.com/wireless)

Sarah Miller  
Marketing  
Cree, RF Components  
1.919.407.5302

Ryan Baker  
Cree, Marketing, RF Components  
1.919.407.7816

Tom Dekker  
Cree, Sales Director, RF Components  
1.919.313.5639



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.