

SN54ABT162601, SN74ABT162601 18-BIT UNIVERSAL BUS TRANSCEIVERS WITH 3-STATE OUTPUTS

SCBS247G – AUGUST 1992 – REVISED JULY 1998

- Members of the Texas Instruments *Widebus™* Family
- B-Port Outputs Have Equivalent 25-Ω Series Resistors, So No External Resistors Are Required
- State-of-the-Art *EPIC-II B™* BiCMOS Design Significantly Reduces Power Dissipation
- *UBT™* (Universal Bus Transceiver) Combines D-Type Latches and D-Type Flip-Flops for Operation in Transparent, Latched, Clocked, or Clock-Enabled Mode
- Latch-Up Performance Exceeds 500 mA Per JESD 17
- Typical V_{OLP} (Output Ground Bounce) < 0.8 V at $V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$
- High-Impedance State During Power Up and Power Down
- Flow-Through Architecture Optimizes PCB Layout
- Package Options Include Plastic 300-mil Shrink Small-Outline (DL) and Thin Shrink Small-Outline (DGG) Packages and 380-mil Fine-Pitch Ceramic Flat (WD) Package Using 25-mil Center-to-Center Spacings

description

These 18-bit universal bus transceivers combine D-type latches and D-type flip-flops to allow data flow in transparent, latched, and clocked modes.

Data flow in each direction is controlled by output-enable ($\overline{OEAB}$ and $\overline{OEBA}$), latch-enable (LEAB and LEBA), and clock (CLKAB and CLKBA) inputs. The clock can be controlled by the clock-enable ($\overline{CLKENAB}$ and $\overline{CLKENBA}$) inputs.

For A-to-B data flow, the device operates in the transparent mode when LEAB is high. When LEAB is low, the A data is latched if CLKAB is held at a high or low logic level. If LEAB is low, the A data is stored in the latch/flip-flop on the low-to-high transition of CLKAB. Output-enable $\overline{OEAB}$ is active-low. When $\overline{OEAB}$ is low, the outputs are active. When $\overline{OEAB}$ is high, the outputs are in the high-impedance state. Data flow for B to A is similar to that of A to B but uses $\overline{OEBA}$, LEBA, CLKBA, and $\overline{CLKENBA}$.

The B-port outputs, which are designed to source or sink up to 12 mA, include equivalent 25-Ω series resistors to reduce overshoot and undershoot.

When V_{CC} is between 0 and 2.1 V, the device is in the high-impedance state during power up or power down. However, to ensure the high-impedance state above 2.1 V, $\overline{OE}$ should be tied to V_{CC} through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

SN54ABT162601 . . . WD PACKAGE
SN74ABT162601 . . . DGG OR DL PACKAGE
(TOP VIEW)

$\overline{OEAB}$	1	56	$\overline{CLKENAB}$
LEAB	2	55	CLKAB
A1	3	54	B1
GND	4	53	GND
A2	5	52	B2
A3	6	51	B3
V_{CC}	7	50	V_{CC}
A4	8	49	B4
A5	9	48	B5
A6	10	47	B6
GND	11	46	GND
A7	12	45	B7
A8	13	44	B8
A9	14	43	B9
A10	15	42	B10
A11	16	41	B11
A12	17	40	B12
GND	18	39	GND
A13	19	38	B13
A14	20	37	B14
A15	21	36	B15
V_{CC}	22	35	V_{CC}
A16	23	34	B16
A17	24	33	B17
GND	25	32	GND
A18	26	31	B18
$\overline{OEBA}$	27	30	CLKBA
LEBA	28	29	$\overline{CLKENBA}$



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Widebus, EPIC-II B, and UBT are trademarks of Texas Instruments Incorporated.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1998, Texas Instruments Incorporated
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

SN54ABT162601, SN74ABT162601

18-BIT UNIVERSAL BUS TRANSCEIVERS

WITH 3-STATE OUTPUTS

SCBS247G – AUGUST 1992 – REVISED JULY 1998

description (continued)

The SN54ABT162601 is characterized for operation over the full military temperature range of -55°C to 125°C .
The SN74ABT162601 is characterized for operation from -40°C to 85°C .

FUNCTION TABLE[†]

INPUTS					OUTPUT
CLKENAB	OEAB	LEAB	CLKAB	A	B
X	H	X	X	X	Z
X	L	H	X	L	L
X	L	H	X	H	H
H	L	L	X	X	B ₀ [‡]
H	L	L	X	X	B ₀ [‡]
L	L	L	↑	L	L
L	L	L	↑	H	H
L	L	L	L	X	B ₀ [‡]
L	L	L	H	X	B ₀ [§]

[†] A-to-B data flow is shown: B-to-A flow is similar but uses OEBA, LEBA, CLKBA, and CLKENBA.

[‡] Output level before the indicated steady-state input conditions were established

[§] Output level before the indicated steady-state input conditions were established, provided that CLKAB was low before LEAB went low

The diagram illustrates the logic for a 17-channel receiver. On the left, there are 17 input signals: OEAB (1), CLKENAB (56), CLKAB (55), LEAB (2), LEBA (28), CLKBA (30), CLKENBA (29), OEBA (27), and A1 (3). Each of these signals passes through an inverter. The outputs of these inverters are connected to two 4-bit comparators, labeled 'CE 1D LE CLK'. The comparators are configured to compare the input signals against a reference value. The outputs of the comparators are connected to a 54-bit output signal, B1. The diagram also shows a connection to 'To 17 Other Channels'.

Supply voltage range, V_{CC}		–0.5 V to 7 V
Input voltage range, V_I (except I/O ports) (see Note 1)		–0.5 V to 7 V
Voltage range applied to any output in the high or power-off state, V_O		–0.5 V to 5.5 V
Current into any output in the low state, I_O : SN54ABT162601 (A port)		96 mA
SN74ABT162601 (A port)		128 mA
B port		30 mA
Input clamp current, I_{IK} ($V_I < 0$)		–18 mA
Output clamp current, I_{OK} ($V_O < 0$)		–50 mA
Package thermal impedance, θ_{JA} (see Note 2): DGG package		81°C/W
DL package		74°C/W
Storage temperature range, T_{Stg}		–65°C to 150°C

NOTES:

1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
2. The package thermal impedance is calculated in accordance with JEDEC 51.

SN54ABT162601, SN74ABT162601

18-BIT UNIVERSAL BUS TRANSCEIVERS

WITH 3-STATE OUTPUTS

SCBS247G – AUGUST 1992 – REVISED JULY 1998

recommended operating conditions (see Note 3)

			SN54ABT162601		SN74ABT162601		UNIT
			MIN	MAX	MIN	MAX	
V_{CC}	Supply voltage		4.5	5.5	4.5	5.5	V
V_{IH}	High-level input voltage		2		2		V
V_{IL}	Low-level input voltage			0.8		0.8	V
V_I	Input voltage		0	V_{CC}	0	V_{CC}	V
I_{OH}	High-level output current	A port		–24		–32	mA
		B port		–12		–12	
I_{OL}	Low-level output current	A port		48		64	mA
		B port		12		12	
$\Delta t/\Delta v$	Input transition rise or fall rate	Outputs enabled		10		10	ns/V
$\Delta t/\Delta V_{CC}$	Power-up ramp rate		200		200		μ s/V
T_A	Operating free-air temperature		–55	125	–40	85	°C

NOTE 3: All unused inputs of the devices must be held at V_{CC} or GND to ensure proper device operation. Refer to the TI application note, *Implications of Slow or Floating CMOS Inputs*, literature number SCBA004.

SN54ABT162601, SN74ABT162601
18-BIT UNIVERSAL BUS TRANSCEIVERS
WITH 3-STATE OUTPUTS

SCBS247G – AUGUST 1992 – REVISED JULY 1998

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T _A = 25°C			SN54ABT162601		SN74ABT162601		UNIT
				MIN	TYP [†]	MAX	MIN	MAX	MIN	MAX	
V _{IK}		V _{CC} = 4.5 V, I _I = −18 mA		−1.2			−1.2		−1.2		V
V _{OH}	A port	V _{CC} = 4.5 V, I _{OH} = −3 mA		2.5			2.5		2.5		V
		V _{CC} = 5 V, I _{OH} = −3 mA		3			3		3		
		V _{CC} = 4.5 V	I _{OH} = −24 mA	2			2				
			I _{OH} = −32 mA	2*					2		
	B port	V _{CC} = 4.5 V, I _{OH} = −1 mA		3.35			3.3		3.35		
		V _{CC} = 5 V, I _{OH} = −1 mA		3.85			3.8		3.85		
		V _{CC} = 4.5 V	I _{OH} = −3 mA	3.1			3		3.1		
			I _{OH} = −12 mA	2.6					2.6		
V _{OL}	A port	V _{CC} = 4.5 V	I _{OL} = 48 mA	0.55			0.55				V
	I _{OL} = 64 mA		0.55*					0.55			
	B port	V _{CC} = 4.5 V, I _{OL} = 12 mA		0.8			0.8		0.8		
V _{hys}				100							mV
I _I	Control inputs	V _{CC} = 0 to 5.5 V, V _I = V _{CC} or GND		±1			±1		±1		μA
	A or B ports	V _{CC} = 2.1 V to 5.5 V, V _I = V _{CC} or GND		±20			±20		±20		
I _{OZPU}		V _{CC} = 0 to 2.1 V, V _O = 0.5 V to 2.7 V, $\overline{OE}$ = X		±50			±50**		±50		μA
I _{OZPD}		V _{CC} = 2.1 V to 0, V _O = 0.5 V to 2.7 V, $\overline{OE}$ = X		±50			±50**		±50		μA
I _{OZH} [‡]		V _{CC} = 2.1 V to 5.5 V, V _O = 2.7 V, $\overline{OE}$ ≥ 2 V		10			10		10		μA
I _{OZL} [‡]		V _{CC} = 2.1 V to 5.5 V, V _O = 0.5 V, $\overline{OE}$ ≥ 2 V		−10			−10		−10		μA
I _{off}		V _{CC} = 0, V _I or V _O ≤ 4.5 V		±100*					±100		μA
I _{CEX}		V _{CC} = 5.5 V, V _O = 5.5 V	Outputs high	50			50		50		μA
I _O [§]	A port	V _{CC} = 5.5 V, V _O = 2.5 V		−50	−100	−180	−50	−180	−50	−180	mA
	B port			−25	−55	−100	−25	−100	−25	−100	
I _{CC}	A or B ports	V _{CC} = 5.5 V, I _O = 0, V _I = V _{CC} or GND	Outputs high	3			3		3		mA
			Outputs low	36			36		36		
			Outputs disabled	3			3		3		
ΔI _{CC}		V _{CC} = 5.5 V, One input at 3.4 V, Other inputs at V _{CC} or GND		50			50		50		μA
C _i	Control inputs	V _I = 2.5 V or 0.5 V		3							pF
C _{iO}	A or B ports	V _O = 2.5 V or 0.5 V		9							pF

* On products compliant to MIL-PRF-38535, this parameter does not apply.

** On products compliant to MIL-PRF-38535, this parameter is not production tested.

† All typical values are at V_{CC} = 5 V.

‡ The parameters I_{OZH} and I_{OZL} include the input leakage current.

§ Not more than one output should be tested at a time, and the duration of the test should not exceed one second.

¶ This is the increase in supply current for each input that is at the specified TTL voltage level rather than V_{CC} or GND.



SN54ABT162601, SN74ABT162601

18-BIT UNIVERSAL BUS TRANSCEIVERS

WITH 3-STATE OUTPUTS

SCBS247G – AUGUST 1992 – REVISED JULY 1998

timing requirements over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted)(see Figure 1)

				SN54ABT162601		SN74ABT162601		UNIT
				MIN	MAX	MIN	MAX	
f _{clock}	Clock frequency			0	150	0	150	MHz
t _w	Pulse duration	LEAB or LEBA high		2.5		2.5		ns
		CLKAB or CLKBA high or low		3.3		3		
t _{su}	Setup time	A before CLKAB↑ or B before CLKBA↑		4.8		4.3		ns
		A before LEAB↓ or B before LEBA↓	CLK high	2.5		2.5		
			CLK low	1.2		1		
		CLKEN before CLK↑		2.7		2.7		
t _h	Hold time	A after CLKAB↑ or B after CLKBA↑		0.5		0		ns
		A after LEAB↓ or B after LEBA↓		2		0.5		
		CLKEN after CLK↑		0.5		0		


switching characteristics over recommended ranges of supply voltage and operating free-air temperature, $C_L = 50$ pF (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 5$ V, $T_A = 25^\circ\text{C}$			SN54ABT162601		SN74ABT162601		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
f_{max}			150			150		150		MHz
t_{PLH}	A	B	1.5	2.8	4	1.5	5.1	1.5	4.8	ns
t_{PHL}			2	3.7	5.2	2	6.1	2	5.7	
t_{PLH}	B	A	1	2.5	3.6	1	4.5	1	4	ns
t_{PHL}			2	3.3	4.5	2	5.1	2	4.9	
t_{PLH}	LEBA	A	2	3.3	4.5	2	5.6	2	5	ns
t_{PHL}			2	3.6	4.7	2	5.4	2	5	
t_{PLH}	LEAB	B	2	3.4	4.8	2	6.1	2	5.6	ns
t_{PHL}			2	3.8	5.2	2	6.4	2	5.9	
t_{PLH}	CLKBA	A	1.5	3.1	4.7	1.5	5.4	1.5	5.3	ns
t_{PHL}			1.5	3.1	4.3	1.5	5.2	1.5	5	
t_{PLH}	CLKAB	B	1.5	3.3	4.7	1.5	6	1.5	5.5	ns
t_{PHL}			1.5	3.5	4.8	1.5	5.8	1.5	5.3	
t_{PZH}	$\overline{\text{OEBA}}$	A	2	3.5	4.6	2	5.5	2	5.1	ns
t_{PZL}			2	3.7	4.7	2	5.8	2	5.4	
t_{PZH}	$\overline{\text{OEAB}}$	B	2	3.8	5.3	1.5	6.6	2	6.1	ns
t_{PZL}			2	3.6	5.1	2	6.2	2	5.7	
t_{PHZ}	$\overline{\text{OEBA}}$	A	2	3.6	5.4	1.4	6.6	2	6.2	ns
t_{PLZ}			1.5	3.2	4.7	1.5	5.8	1.5	5.4	
t_{PHZ}	$\overline{\text{OEAB}}$	B	2	3.4	4.8	1.4	5.6	2	5.4	ns
t_{PLZ}			1.5	3.2	4.5	1.5	5.7	1.5	5.2	

SN54ABT162601, SN74ABT162601 18-BIT UNIVERSAL BUS TRANSCEIVERS WITH 3-STATE OUTPUTS


SCBS247G – AUGUST 1992 – REVISED JULY 1998

PARAMETER MEASUREMENT INFORMATION

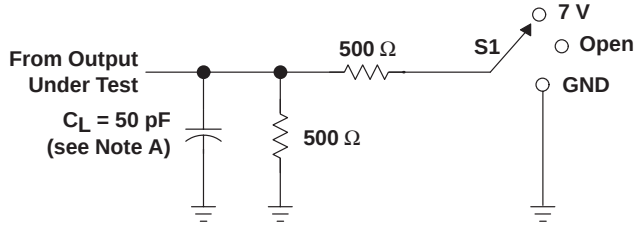


LOAD CIRCUIT


TEST	S1
t_{PLH}/t_{PHL}	Open
t_{PLZ}/t_{PZL}	7 V
t_{PHZ}/t_{PZH}	Open

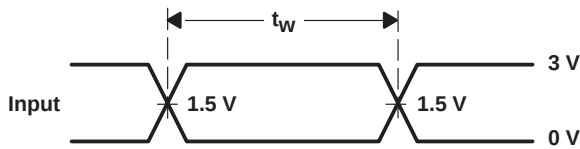


VOLTAGE WAVEFORMS
PULSE DURATION

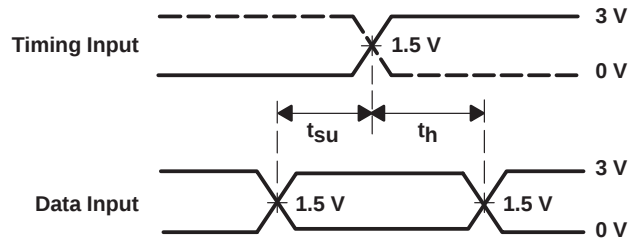

VOLTAGE WAVEFORMS
SETUP AND HOLD TIMES

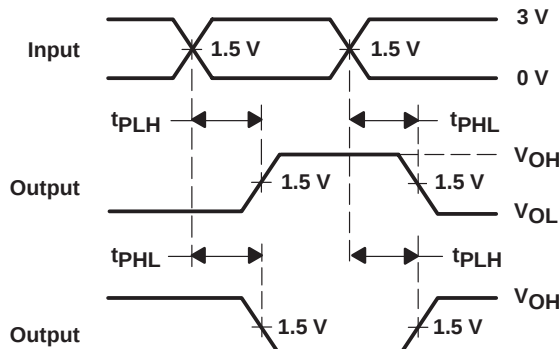

VOLTAGE WAVEFORMS
PROPAGATION DELAY TIMES
INVERTING AND NONINVERTING OUTPUTS

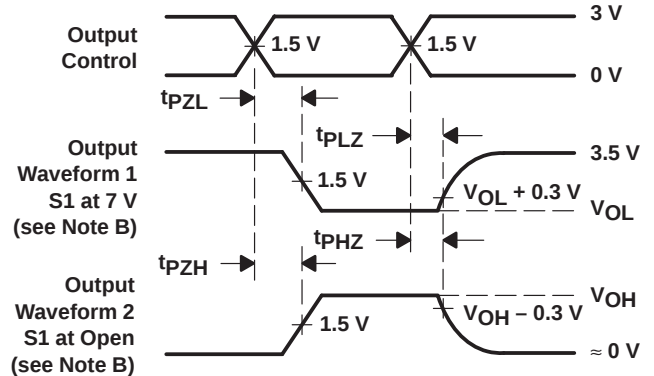

VOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES
LOW- AND HIGH-LEVEL ENABLING

- NOTES: A. C_L includes probe and jig capacitance.
B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
C. All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r \leq 2.5 \text{ ns}$, $t_f \leq 2.5 \text{ ns}$.
D. The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.