

Features

- ◆ Wide 2:1 input voltage range
- ◆ Fully regulated output voltage
- ◆ Compact SIP-8 package
- ◆ Models with 1'500 VDC and 3'000 VDC I/O isolation (functional insulation)
- ◆ Small footprint
- ◆ Temperature range -40° to $+85^{\circ}\text{C}$
- ◆ High efficiency up to 85%
- ◆ Short-circuit protection
- ◆ Remote On/Off control
- ◆ 3-year product warranty



The TMR-3 series is a new family of isolated 3W dc-dc converter modules with regulated output, featuring wide 2:1 input voltage ranges. The product comes in a compact SIP-8 plastic package with a small footprint occupying only 2.0 cm² (0.3 square in.) of board space.

An excellent efficiency allows -40° to $+85^{\circ}\text{C}$ operation temperatures. Further features include remote On/Off control and continuous short circuit protection. The compact dimensions of these converters make them an ideal solution for many space critical applications in communication equipment, instrumentation and industrial electronics.

Models

Order code		Input voltage range	Output voltage	Output current max.	Efficiency typ.
1500 VDC isolation	3000 VDC isolation				
TMR 3-0510	TMR 3-0510HI	4.5 – 9.0 VDC (5 VDC nominal)	3.3 VDC	700 mA	75 %
TMR 3-0511	TMR 3-0511HI		5 VDC	600 mA	79 %
TMR 3-0512	TMR 3-0512HI		12 VDC	250 mA	81 %
TMR 3-0513	TMR 3-0513HI		15 VDC	200 mA	82 %
TMR 3-0521	TMR 3-0521HI		± 5 VDC	± 300 mA	78 %
TMR 3-0522	TMR 3-0522HI		± 12 VDC	± 125 mA	81 %
TMR 3-0523	TMR 3-0523HI		± 15 VDC	± 100 mA	81 %
TMR 3-1210	TMR 3-1210HI	9 – 18 VDC (12 VDC nominal)	3.3 VDC	700 mA	77 %
TMR 3-1211	TMR 3-1211HI		5 VDC	600 mA	81 %
TMR 3-1212	TMR 3-1212HI		12 VDC	250 mA	83 %
TMR 3-1213	TMR 3-1213HI		15 VDC	200 mA	83 %
TMR 3-1221	TMR 3-1221HI		± 5 VDC	± 300 mA	82 %
TMR 3-1222	TMR 3-1222HI		± 12 VDC	± 125 mA	83 %
TMR 3-1223	TMR 3-1223HI		± 15 VDC	± 100 mA	83 %
TMR 3-2410	TMR 3-2410HI	18 – 36 VDC (24 VDC nominal)	3.3 VDC	700 mA	76 %
TMR 3-2411	TMR 3-2411HI		5 VDC	600 mA	82 %
TMR 3-2412	TMR 3-2412HI		12 VDC	250 mA	83 %
TMR 3-2413	TMR 3-2413HI		15 VDC	200 mA	84 %
TMR 3-2421	TMR 3-2421HI		± 5 VDC	± 300 mA	80 %
TMR 3-2422	TMR 3-2422HI		± 12 VDC	± 125 mA	83 %
TMR 3-2423	TMR 3-2423HI		± 15 VDC	± 100 mA	85 %
TMR 3-4810	TMR 3-4810HI	36 – 75 VDC (48 VDC nominal)	3.3 VDC	700 mA	74 %
TMR 3-4811	TMR 3-4811HI		5 VDC	600 mA	79 %
TMR 3-4812	TMR 3-4812HI		12 VDC	250 mA	81 %
TMR 3-4813	TMR 3-4813HI		15 VDC	200 mA	82 %
TMR 3-4821	TMR 3-4821HI		± 5 VDC	± 300 mA	79 %
TMR 3-4822	TMR 3-4822HI		± 12 VDC	± 125 mA	82 %
TMR 3-4823	TMR 3-4823HI		± 15 VDC	± 100 mA	83 %

Input Specifications

Input current at full load / at no load (nominal input voltage)		4.5–9 Vin models: 810 mA max. / 60 mA typ. 9–18 Vin models: 330 mA max. / 30 mA typ. 18–36 Vin models: 160 mA max. / 18 mA typ. 36–75 Vin models: 85 mA max. / 12 mA typ.
Surge voltage (100 msec. max.)		4.5–9 Vin models: 15 V max. 9–18 Vin models: 36 V max. 18–36 Vin models: 50 V max. 36–75 Vin models: 100 V max.
Input voltage variation (dv/dt)		5 V/ms, max. (complies with ETS300 132 part 4.4)
Input filter		capacitor type (see application note for compliance to EN 55022 class A/B)
Start up time (constant resistive load)	– Power On	30 ms typ.
	– Remote On	30 ms typ.

Output Specifications

Voltage set accuracy		±1 % max
Regulation	– Input variation Vin min. to Vin max.	0.2 % max.
	– Load variation 5 – 100%	single output models: 0.5 % max. dual output models: 1.0 % max. balanced load
	– Load variation 0 – 100%	single output models: 1.0 % max. dual output models: 1.0 % max. balanced load
	– Load cross regulation 25/100%	5.0 % max. (dual output models)
Minimum load		0 % of rated max. load
Ripple and noise (20 MHz Bandwidth)		50 mVpk-pk max.
Transient response setting time (25% load step change)		500 µs typ.
Short circuit protection		indefinite, automatic recovery
Capacitive load	3.3 VDC / 5 VDC output models:	3300 µF max. / 1680 µF max.
	12 VDC / 15 VDC output models:	820 µF max. / 680 µF max.
	±5 VDC / ±12 VDC output models:	±1000 µF max. / ±470 µF max.
	±15 VDC output models:	±330 µF max.

General Specifications

Temperature ranges	– Operating	–40°C to +85°C
	– Case temperature	+100°C max.
	– Storage	–55°C to +105°C
Load derating		3.3 %/K above 70°C
Humidity (non condensing)		95 % rel. H max.
Temperature coefficient		±0.02 %/K
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		>4.8 Mio h
Isolation voltage (60 sec.)	– Input/Output	1500 VDC
	with suffix -HI:	3000 VDC
Isolation capacitance	– Input/Output	200 pF max.
	with suffix -HI:	40 pF max.
Isolation resistance		>10 GOhm
Switching frequency		100 kHz min. (PFM)
Remote On/Off	– On:	open or high impedance
	– Off:	2...4 mA current applied via 1KOhm resistor
	– Off stand by input current	2.5 mA max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications


Safety standards	IEC/EN 60950-1, UL 60950-1
Safety approvals	– UL/cUL www.ul.com > UL File no.: e188913
Environmental compliance	– Reach – RoHS www.tracopower.com/products/tmr3-reach.pdf RoHS directive 2011/65/EU

Physical Specifications

Casing material	non-conductive plastic
Potting material	silicone, (UL 94V-0 rated)
Weight	4.8 g (0.17oz)

Application note: www.tracopower.com/products/tmr3-application.pdf

Outline Dimensions mm (inches)

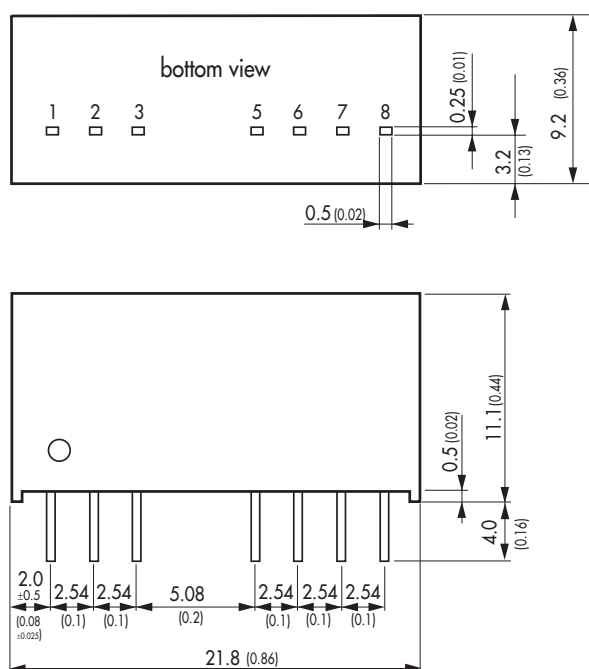

Pin-Out		
Pin	Single	Dual
1	–Vin (GND)	–Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	Remote On/Off	Remote On/Off
5*	No function	No function
6	+Vout	+Vout
7	–Vout	Common
8	No function	–Vout

*No pin 5 with HI version

Dimensions in [mm], () = Inch
Tolerances: ± 0.5 (± 0.02)
Pin pitch tolerances: ± 0.25 (± 0.01)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.