

### Features

- ◆ Wide 2:1 input voltage range
- ◆ Fully regulated output voltage
- ◆ Compact SIP-8 package
- ◆ Models with 1'500 VDC and 3'000 VDC I/O isolation (functional insulation)
- ◆ Small footprint
- ◆ Temperature range  $-40^{\circ}$  to  $+85^{\circ}\text{C}$
- ◆ High efficiency up to 85%
- ◆ Short-circuit protection
- ◆ Remote On/Off control
- ◆ 3-year product warranty



The TMR-3 series is a new family of isolated 3W dc-dc converter modules with regulated output, featuring wide 2:1 input voltage ranges. The product comes in a compact SIP-8 plastic package with a small footprint occupying only 2.0 cm<sup>2</sup> (0.3 square in.) of board space.

An excellent efficiency allows  $-40^{\circ}$  to  $+85^{\circ}\text{C}$  operation temperatures. Further features include remote On/Off control and continuous short circuit protection. The compact dimensions of these converters make them an ideal solution for many space critical applications in communication equipment, instrumentation and industrial electronics.

### Models

| Order code         |                    | Input voltage range              | Output voltage                  | Output current max. | Efficiency typ. |
|--------------------|--------------------|----------------------------------|---------------------------------|---------------------|-----------------|
| 1500 VDC isolation | 3000 VDC isolation |                                  |                                 |                     |                 |
| TMR 3-0510         | TMR 3-0510HI       | 4.5 – 9.0 VDC<br>(5 VDC nominal) | 3.3 VDC                         | 700 mA              | 75 %            |
| TMR 3-0511         | TMR 3-0511HI       |                                  | 5 VDC                           | 600 mA              | 79 %            |
| TMR 3-0512         | TMR 3-0512HI       |                                  | 12 VDC                          | 250 mA              | 81 %            |
| TMR 3-0513         | TMR 3-0513HI       |                                  | 15 VDC                          | 200 mA              | 82 %            |
| TMR 3-0521         | TMR 3-0521HI       |                                  | $\pm 5$ VDC                     | $\pm 300$ mA        | 78 %            |
| TMR 3-0522         | TMR 3-0522HI       |                                  | $\pm 12$ VDC                    | $\pm 125$ mA        | 81 %            |
| TMR 3-0523         | TMR 3-0523HI       |                                  | $\pm 15$ VDC                    | $\pm 100$ mA        | 81 %            |
| TMR 3-1210         | TMR 3-1210HI       |                                  | 9 – 18 VDC<br>(12 VDC nominal)  | 3.3 VDC             | 700 mA          |
| TMR 3-1211         | TMR 3-1211HI       | 5 VDC                            |                                 | 600 mA              | 81 %            |
| TMR 3-1212         | TMR 3-1212HI       | 12 VDC                           |                                 | 250 mA              | 83 %            |
| TMR 3-1213         | TMR 3-1213HI       | 15 VDC                           |                                 | 200 mA              | 83 %            |
| TMR 3-1221         | TMR 3-1221HI       | $\pm 5$ VDC                      |                                 | $\pm 300$ mA        | 82 %            |
| TMR 3-1222         | TMR 3-1222HI       | $\pm 12$ VDC                     |                                 | $\pm 125$ mA        | 83 %            |
| TMR 3-1223         | TMR 3-1223HI       | $\pm 15$ VDC                     |                                 | $\pm 100$ mA        | 83 %            |
| TMR 3-2410         | TMR 3-2410HI       | 18 – 36 VDC<br>(24 VDC nominal)  |                                 | 3.3 VDC             | 700 mA          |
| TMR 3-2411         | TMR 3-2411HI       |                                  | 5 VDC                           | 600 mA              | 82 %            |
| TMR 3-2412         | TMR 3-2412HI       |                                  | 12 VDC                          | 250 mA              | 83 %            |
| TMR 3-2413         | TMR 3-2413HI       |                                  | 15 VDC                          | 200 mA              | 84 %            |
| TMR 3-2421         | TMR 3-2421HI       |                                  | $\pm 5$ VDC                     | $\pm 300$ mA        | 80 %            |
| TMR 3-2422         | TMR 3-2422HI       |                                  | $\pm 12$ VDC                    | $\pm 125$ mA        | 83 %            |
| TMR 3-2423         | TMR 3-2423HI       |                                  | $\pm 15$ VDC                    | $\pm 100$ mA        | 85 %            |
| TMR 3-4810         | TMR 3-4810HI       |                                  | 36 – 75 VDC<br>(48 VDC nominal) | 3.3 VDC             | 700 mA          |
| TMR 3-4811         | TMR 3-4811HI       | 5 VDC                            |                                 | 600 mA              | 79 %            |
| TMR 3-4812         | TMR 3-4812HI       | 12 VDC                           |                                 | 250 mA              | 81 %            |
| TMR 3-4813         | TMR 3-4813HI       | 15 VDC                           |                                 | 200 mA              | 82 %            |
| TMR 3-4821         | TMR 3-4821HI       | $\pm 5$ VDC                      |                                 | $\pm 300$ mA        | 79 %            |
| TMR 3-4822         | TMR 3-4822HI       | $\pm 12$ VDC                     |                                 | $\pm 125$ mA        | 82 %            |
| TMR 3-4823         | TMR 3-4823HI       | $\pm 15$ VDC                     |                                 | $\pm 100$ mA        | 83 %            |

### Input Specifications

|  |  |
|--|--|
| Input current at full load / at no load<br>(nominal input voltage) | 4.5–9 Vin models: 810 mA max. / 60 mA typ.<br>9–18 Vin models: 330 mA max. / 30 mA typ.<br>18–36 Vin models: 160 mA max. / 18 mA typ.<br>36–75 Vin models: 85 mA max. / 12 mA typ. |
| Surge voltage (100 msec. max.)                                     | 4.5–9 Vin models: 15 V max.<br>9–18 Vin models: 36 V max.<br>18–36 Vin models: 50 V max.<br>36–75 Vin models: 100 V max.   |
| Input voltage variation (dv/dt)                                    | 5 V/ms, max.<br>(complies with ETS300 132 part 4.4)  |
| Input filter   | capacitor type (see application note for compliance to EN 55022 class A/B)   |
| Start up time<br>(constant resistive load)                         | – Power On: 30 ms typ.<br>– Remote On: 30 ms typ.  |

### Output Specifications

|  |  |
|--|--|
| Voltage set accuracy                                   | ±1 % max   |
| Regulation   | – Input variation Vin min. to Vin max.: 0.2 % max.<br>– Load variation 5 – 100%<br>single output models: 0.5 % max.<br>dual output models: 1.0 % max. balanced load<br>– Load variation 0 – 100%<br>single output models: 1.0 % max.<br>dual output models: 1.0 % max. balanced load<br>– Load cross regulation 25/100%: 5.0 % max. (dual output models) |
| Minimum load   | 0 % of rated max. load   |
| Ripple and noise (20 MHz Bandwidth)                    | 50 mVpk-pk max.  |
| Transient response setting time (25% load step change) | 500 µs typ.  |
| Short circuit protection                               | indefinite, automatic recovery   |
| Capacitive load  | 3.3 VDC / 5 VDC output models: 3300 µF max. / 1680 µF max.<br>12 VDC / 15 VDC output models: 820 µF max. / 680 µF max.<br>±5 VDC / ±12 VDC output models: ±1000 µF max. / ±470 µF max.<br>±15 VDC output models: ±330 µF max.  |

### General Specifications

|   |   |
|---|---|
| Temperature ranges  | – Operating: –40°C to +85°C<br>– Case temperature: +100°C max.<br>– Storage: –55°C to +105°C                                    |
| Load derating   | 3.3 %/K above 70°C  |
| Humidity (non condensing)   | 95 % rel. H max.  |
| Temperature coefficient   | ±0.02 %/K   |
| Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign) | >4.8 Mio h  |
| Isolation voltage (60 sec.)   | – Input/Output: 1500 VDC<br>with suffix -HI: 3000 VDC   |
| Isolation capacitance   | – Input/Output: 200 pF max.<br>with suffix -HI: 40 pF max.  |
| Isolation resistance  | – Input/Output (500 VDC): >10 GOhm  |
| Switching frequency   | 100 kHz min. (PFM)  |
| Remote On/Off   | – On: open or high impedance<br>– Off: 2...4 mA current applied via 1KOhm resistor<br>– Off stand by input current: 2.5 mA max. |

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**General Specifications**


|                          |                   |   |
|--------------------------|-------------------|---|
| Safety standards         |                   | IEC/EN 60950-1, UL 60950-1  |
| Safety approvals         | - UL/cUL          | <a href="http://www.ul.com">www.ul.com</a> > UL File no.: e188913   |
| Environmental compliance | - Reach<br>- RoHS | <a href="http://www.tracopower.com/products/tmr3-reach.pdf">www.tracopower.com/products/tmr3-reach.pdf</a><br>RoHS directive 2011/65/EU |

**Physical Specifications**

|                  |  |                            |
|------------------|--|----------------------------|
| Casing material  |  | non-conductive plastic     |
| Potting material |  | silicone, (UL 94V-0 rated) |
| Weight           |  | 4.8 g (0.17oz)             |

**Application note:** [www.tracopower.com/products/tmr3-application.pdf](http://www.tracopower.com/products/tmr3-application.pdf)

**Outline Dimensions mm (inches)**

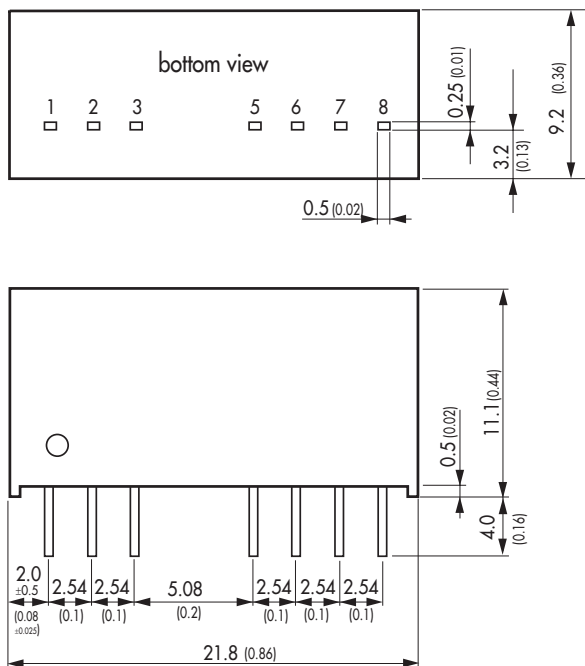

| Pin-Out |               |               |
|---------|---------------|---------------|
| Pin     | Single        | Dual          |
| 1       | -Vin (GND)    | -Vin (GND)    |
| 2       | +Vin (Vcc)    | +Vin (Vcc)    |
| 3       | Remote On/Off | Remote On/Off |
| 5*      | No function   | No function   |
| 6       | +Vout         | +Vout         |
| 7       | -Vout         | Common        |
| 8       | No function   | -Vout         |

\*No pin 5 with HI version

Dimensions in [mm], ( ) = Inch  
Tolerances: ±0.5 (±0.02)  
Pin pitch tolerances: ±0.25 (±0.01)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at [www.tracopower.com](http://www.tracopower.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.