




ZIGBEE® RF MODULES  
FOR OEMS

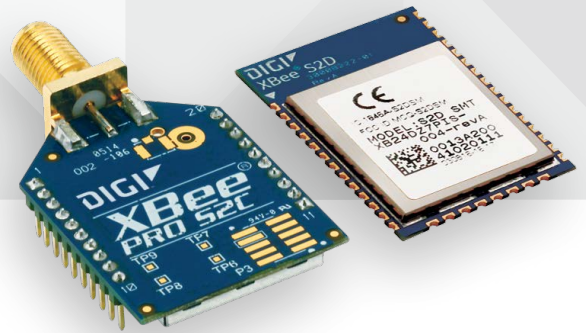

# DIGI XBEE® AND DIGI XBEE-PRO® ZIGBEE

Embedded ZigBee modules provide OEMs with a simple way to integrate mesh technology into their application

Digi XBee and Digi XBee-PRO ZigBee RF modules provide cost-effective wireless connectivity to electronic devices. They are interoperable with other ZigBee PRO feature set devices, including devices from other vendors\*.

Digi XBee and Digi XBee-PRO ZigBee modules are ideal for applications in the energy and controls markets where manufacturing efficiencies are critical. The Serial Peripheral Interface (SPI) provides a high-speed interface and optimizes integration with embedded microcontrollers, lowering development costs and reducing time to market.

Products in the Digi XBee family require little to no configuration or additional development. Programmable

versions of the Digi XBee and Digi XBee-PRO ZigBee module make customizing applications easy. Programming directly on the module eliminates the need for a separate processor. Because the wireless software is isolated, applications can be developed with no risk to RF performance or security.

Digi's ZigBee compatible module is based on the Ember EM35x (EM357 and EM3587) system on chip (SoC) radio ICs from SiliconLabs, utilizing 32-bit ARM Cortex™ M3 processor. The S2D EM3587 version has a larger memory footprint for customers who may want to upgrade to Thread, an IPv6 based networking stack.

\*Interoperability requires the ZigBee Feature Set or ZigBee PRO Feature Set to be deployed on all devices. Contact Digi Support for details.

## BENEFITS

- Programmable versions with on-board microprocessor enable custom ZigBee application development
- Through-Hole and Surface Mount form factors enable flexible design options
- Link budgets of 110 dB for Digi XBee and 119 dB for Digi XBee-PRO
- Industry-leading sleep current
- Firmware upgrades via UART, SPI or over the air (OTA)
- Thread updatable on the S2D EM3587 variant for maximum flexibility

## RELATED PRODUCTS



Digi XBee Gateways



Modules



Network Extenders




Development Kits



Digi Remote Manager®

## APPLICATION EXAMPLE

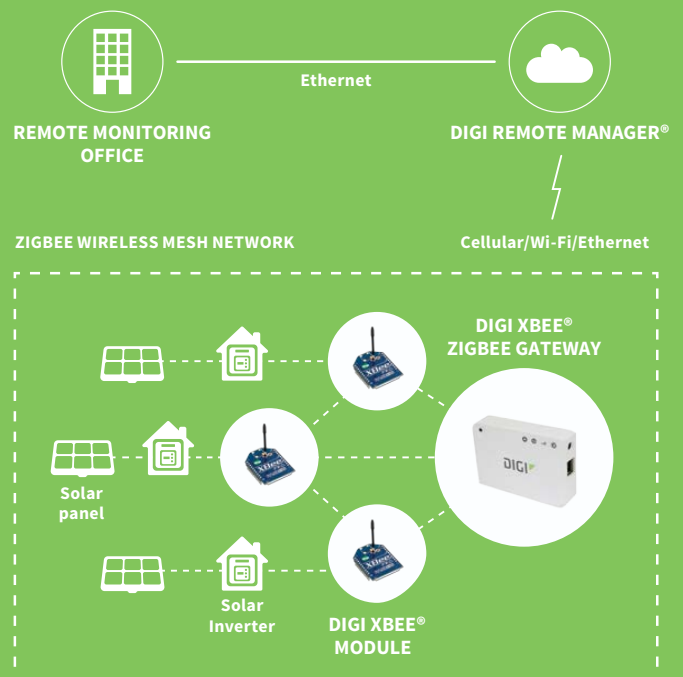

| SPECIFICATIONS                    |  | Digi XBee® S2C ZigBee<br>Standard   Programmable                                                                              |                                    | Digi XBee-PRO® S2C ZigBee<br>Standard   Programmable                                                       |                         | Digi XBee® S2D ZigBee Thread Ready<br>Standard        |  |
|-----------------------------------|--|-------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------------------------------------|--|
| PERFORMANCE                       |  |                                                                                                                               |                                    |                                                                                                            |                         |                                                       |  |
| TRANSCIVER CHIPSET                |  | Silicon Labs EM357 SoC                                                                                                        |                                    |                                                                                                            |                         | Silicon Labs EM3587 Soc                               |  |
| DATA RATE                         |  | RF 250 Kbps, Serial up to 1 Mbps                                                                                              |                                    |                                                                                                            |                         |                                                       |  |
| INDOOR/URBAN RANGE*               |  | Up to 200 ft (60 m)                                                                                                           |                                    | Up to 300 ft (90 m)                                                                                        |                         | Up to 200 ft (60 m)                                   |  |
| OUTDOOR/RF LINE-OF-SIGHT RANGE*   |  | Up to 4000 ft (1200 m)                                                                                                        |                                    | Up to 2 miles (3200 m)                                                                                     |                         | Up to 4000 ft (1200 m)                                |  |
| TRANSMIT POWER                    |  | 3.1 mW (+5 dBm) / 6.3 mW (+8 dBm) boost mode                                                                                  |                                    | 63 mW (+18 dBm)                                                                                            |                         | 3.1 mW (+5 dBm) / 6.3 mW (+8 dBm) boost mode          |  |
| RECEIVER SENSITIVITY (1% PER)     |  | -100 dBm / -102 dBm boost mode                                                                                                |                                    | -101 dBm                                                                                                   |                         | -100 dBm / -102 dBm boost mode                        |  |
| FEATURES                          |  |                                                                                                                               |                                    |                                                                                                            |                         |                                                       |  |
| SERIAL DATA INTERFACE             |  | UART, SPI                                                                                                                     |                                    |                                                                                                            |                         |                                                       |  |
| CONFIGURATION METHOD              |  | API or AT commands, local or over-the-air (OTA)                                                                               |                                    |                                                                                                            |                         |                                                       |  |
| FREQUENCY BAND                    |  | ISM 2.4 GHz                                                                                                                   |                                    |                                                                                                            |                         |                                                       |  |
| FORM FACTOR                       |  | Through-Hole, Surface Mount                                                                                                   |                                    |                                                                                                            |                         | Surface Mount                                         |  |
| INTERFERENCE IMMUNITY             |  | DSSS (Direct Sequence Spread Spectrum)                                                                                        |                                    |                                                                                                            |                         |                                                       |  |
| ADC INPUTS                        |  | (4) 10-bit ADC inputs                                                                                                         |                                    |                                                                                                            |                         |                                                       |  |
| DIGITAL I/O                       |  | 15                                                                                                                            |                                    |                                                                                                            |                         |                                                       |  |
| ANTENNA OPTIONS                   |  | Through-Hole: PCB Antenna, U.FL Connector, RPSMA Connector, or Integrated Wire<br>SMT: RF Pad, PCB Antenna, or U.FL Connector |                                    |                                                                                                            |                         |                                                       |  |
| OPERATING TEMPERATURE             |  | -40° C to +85° C                                                                                                              |                                    |                                                                                                            |                         |                                                       |  |
| DIMENSIONS (L X W X H) AND WEIGHT |  | Through-Hole: 0.960 x 1.087 in (2.438 x 2.761 cm)<br>SMT: 0.866 x 1.33 x 0.120 in (2.199 x 3.4 x 0.305 cm)                    |                                    | Through-Hole: 0.960 x 1.297 in (2.438 x 3.294 cm)<br>SMT: 0.866 x 1.33 x 0.120 in (2.199 x 3.4 x 0.305 cm) |                         | SMT: 0.866 x 1.33 x 0.120 in (2.199 x 3.4 x 0.305 cm) |  |
| PROGRAMMABILITY                   |  |                                                                                                                               |                                    |                                                                                                            |                         |                                                       |  |
| MEMORY                            |  | N/A                                                                                                                           | 32 KB Flash / 2 KB RAM             | N/A                                                                                                        | 32 KB Flash / 2 KB RAM  | N/A                                                   |  |
| CPU/CLOCK SPEED                   |  | N/A                                                                                                                           | HCS08 / up to 50.33 MHz            | N/A                                                                                                        | HCS08 / up to 50.33 MHz | N/A                                                   |  |
| NETWORKING AND SECURITY           |  |                                                                                                                               |                                    |                                                                                                            |                         |                                                       |  |
| PROTOCOL                          |  | ZigBee PRO 2007, HA-Ready with support for binding/multicasting                                                               |                                    |                                                                                                            |                         |                                                       |  |
| ENCRYPTION                        |  | 128-bit AES                                                                                                                   |                                    |                                                                                                            |                         |                                                       |  |
| RELIABLE PACKET DELIVERY          |  | Retries/Acknowledgements                                                                                                      |                                    |                                                                                                            |                         |                                                       |  |
| IDS                               |  | PAN ID and addresses, cluster IDs and endpoints (optional)                                                                    |                                    |                                                                                                            |                         |                                                       |  |
| CHANNELS                          |  | 16 channels                                                                                                                   |                                    | 15 channels                                                                                                |                         | 16 channels                                           |  |
| POWER REQUIREMENTS                |  |                                                                                                                               |                                    |                                                                                                            |                         |                                                       |  |
| SUPPLY VOLTAGE                    |  | 2.1 to 3.6V                                                                                                                   |                                    | 2.7 to 3.6V                                                                                                |                         | 2.1 to 3.6V                                           |  |
| TRANSMIT CURRENT                  |  | 33 mA @ 3.3 VDC / 45 mA boost mode                                                                                            | 47 mA @ 3.3 VDC / 59 mA boost mode | 120 mA @ 3.3 VDC                                                                                           | 120 mA @ 3.3 VDC        | 33 mA @ 3.3 VDC / 45 mA boost mode                    |  |
| RECEIVE CURRENT                   |  | 28 mA @ 3.3 VDC / 31 mA boost mode                                                                                            | 42 mA @ 3.3 VDC / 45 mA boost mode | 31 mA @ 3.3 VDC                                                                                            | 45 mA @ 3.3 VDC         | 28 mA @ 3.3 VDC / 31 mA boost mode                    |  |
| POWER-DOWN CURRENT                |  | <1 µA @ 25° C                                                                                                                 | 1.5 µA @ 25° C                     | <1 µA @ 25° C                                                                                              | 1.5 µA @ 25° C          | <3 µA at 25° C                                        |  |
| REGULATORY APPROVALS              |  |                                                                                                                               |                                    |                                                                                                            |                         |                                                       |  |
| FCC, IC (NORTH AMERICA)           |  | Yes                                                                                                                           |                                    | Yes                                                                                                        |                         | Yes                                                   |  |
| ETSI (EUROPE)                     |  | Yes                                                                                                                           |                                    | No                                                                                                         |                         | Yes                                                   |  |
| RCM (AUSTRALIA AND NEW ZEALAND)   |  | Yes                                                                                                                           |                                    | Yes                                                                                                        |                         | No (Coming Soon)                                      |  |

\*Range figure estimates are based on free-air terrain with limited sources of interference. Actual range will vary based on transmitting power, orientation of transmitter and receiver, height of transmitting antenna, height of receiving antenna, weather conditions, interference sources in the area, and terrain between receiver and transmitter, including indoor and outdoor structures such as walls, trees, buildings, hills, and mountains.

| PART NUMBERS       | DESCRIPTION                                                 |
|--------------------|-------------------------------------------------------------|
| <b>S2C MODULES</b> |                                                             |
| XB24CZ7PIT-004     | Digi XBee ZigBee Through-Hole, PCB Antenna                  |
| XB24CZ7WIT-004     | Digi XBee ZigBee Through-Hole, Wire Antenna                 |
| XB24CZ7UIT-004     | Digi XBee ZigBee Through-Hole, U.FL                         |
| XB24CZ7SIT-004     | Digi XBee ZigBee Through-Hole, RPSMA                        |
| XB24CZ7PITB003     | Programmable Digi XBee ZigBee Through-Hole, PCB Antenna     |
| XB24CZ7WITB003     | Programmable Digi XBee ZigBee Through-Hole, Wire Antenna    |
| XB24CZ7UITB003     | Programmable Digi XBee ZigBee Through-Hole, U.FL            |
| XB24CZ7SITB003     | Programmable Digi XBee ZigBee Through-Hole, RPSMA           |
| XB24CZ7PIS-004     | Digi XBee ZigBee SMT, PCB Antenna                           |
| XB24CZ7RIS-004     | Digi XBee ZigBee SMT, RF Pad                                |
| XB24CZ7UIS-004     | Digi XBee ZigBee SMT, U.FL                                  |
| XB24CZ7PISB003     | Programmable Digi XBee ZigBee SMT, PCB Antenna              |
| XB24CZ7RISB003     | Programmable Digi XBee ZigBee SMT, RF Pad                   |
| XB24CZ7UISB003     | Programmable Digi XBee ZigBee SMT, U.FL                     |
| XBP24CZ7PIT-004    | Digi XBee-PRO ZigBee Through-Hole, PCB Antenna              |
| XBP24CZ7WIT-004    | Digi XBee-PRO ZigBee Through-Hole, Wire Antenna             |
| XBP24CZ7UIT-004    | Digi XBee-PRO ZigBee Through-Hole, U.FL                     |
| XBP24CZ7SIT-004    | Digi XBee-PRO ZigBee Through-Hole, RPSMA                    |
| XBP24CZ7PITB003    | Programmable Digi XBee-PRO ZigBee Through-Hole, PCB Antenna |
| XBP24CZ7WITB003    | Programmable Digi XBee-PRO ZigBee Through-Hole, U.FL        |
| XBP24CZ7SITB003    | Programmable Digi XBee-PRO ZigBee Through-Hole, RPSMA       |
| XBP24CZ7PIS-004    | Digi XBee-PRO ZigBee SMT, PCB Antenna                       |
| XBP24CZ7RIS-004    | Digi XBee-PRO ZigBee SMT, RF Pad                            |
| XBP24CZ7UIS-004    | Digi XBee-PRO ZigBee SMT, U.FL                              |
| XBP24CZ7PISB003    | Programmable Digi XBee-PRO ZigBee SMT, PCB Antenna          |
| XBP24CZ7RISB003    | Programmable Digi XBee-PRO ZigBee SMT, RF Pad               |
| XBP24CZ7UISB003    | Programmable Digi XBee-PRO ZigBee SMT, U.FL                 |
| <b>S2D MODULES</b> |                                                             |
| XB24DZ7PIS-004     | Digi XBee ZigBee – Thread Ready SMT, PCB Antenna            |
| XB24DZ7RIS-004     | Digi XBee ZigBee – Thread Ready SMT, RF Pad Antenna         |
| XB24DZ7UIS-004     | Digi XBee ZigBee – Thread Ready SMT, U.FL Antenna           |
| <b>S2C KIT</b>     |                                                             |
| XKB2-Z7T-WZM       | Digi XBee ZigBee Mesh Kit, worldwide                        |
| <b>S2D KIT</b>     |                                                             |
| XKB2-Z7T-WTZM      | Digi XBee ZigBee Mesh Kit, worldwide                        |

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2018 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91002937  
B7/518

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL GERMANY**  
+49-89-540-428-0

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.