

# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1, Low-Voltage Analog Multiplexers

### General Description

The MAX4638/MAX4639 are single 8:1 and dual 4:1 CMOS analog multiplexers/demultiplexers (muxes/demuxes). Each mux operates from a single +1.8V to +5V supply or dual ±2.5V supplies. These devices feature 3.5Ω on-resistance ( $R_{ON}$ ) when powered with a single +5V supply and have -75dB off-isolation and -85dB crosstalk from the output to each off channel. The switching times are 18ns  $t_{ON}$  and 7ns  $t_{OFF}$ . They feature a -3dB 85MHz bandwidth and a guaranteed 0.25nA leakage current at +25°C.

A +1.8V to +5.5V operating range makes the MAX4638/MAX4639 ideal for battery-powered, portable instruments. All channels guarantee break-before-make switching. These parts feature bidirectional operation and can handle Rail-to-Rail® analog signals. All control inputs are TTL/CMOS-logic compatible. Decoding is in standard BCD format, and an enable input is provided to simplify cascading of devices. These devices are available in small 16-pin TQFN, TSSOP, and SO packages, as well as a 20-pin TQFN package.

### Applications

- Automatic Test Equipment
- Low-Voltage Data-Acquisition Systems
- Audio and Video Signal Routing
- Medical Equipment
- Battery-Powered Equipment
- Relay Replacement

### Features

- ◆ **Guaranteed  $R_{ON}$**   
3.5Ω (+5V or ±2.5V Supplies)  
6Ω (+3V Supply)
- ◆ **Guaranteed 0.4Ω  $R_{ON}$  Match Between Channels**
- ◆ **Guaranteed 1Ω  $R_{ON}$  Flatness Over Signal Range**
- ◆ **Guaranteed Low Leakage Currents**  
0.25nA at +25°C
- ◆ **Switching Times:  $t_{ON}$  = 18ns,  $t_{OFF}$  = 7ns**
- ◆ **+1.8V to +5.5V Single-Supply Operation**  
±2.5V Dual-Supply Operation
- ◆ **Rail-to-Rail Signal Handling**
- ◆ **TTL/CMOS-Logic Compatible**
- ◆ **Crosstalk: -80dB (1MHz)**
- ◆ **Off-Isolation: -60dB (10MHz)**

### Ordering Information

| PART         | TEMP RANGE     | PIN-PACKAGE         |
|--------------|----------------|---------------------|
| MAX4638ETE+T | -40°C to +85°C | 16 TQFN-EP* (4 × 4) |
| MAX4638EUE+T | -40°C to +85°C | 16 TSSOP            |
| MAX4638ESE+T | -40°C to +85°C | 16 SO               |
| MAX4638ETP+T | -40°C to +85°C | 20 TQFN-EP* (4 × 4) |


+Denotes a lead(Pb)-free/RoHS-compliant package.

T = Tape and reel.

\*EP = Exposed pad.

Ordering Information continued at end of data sheet.

### Pin Configurations/Functional Diagrams

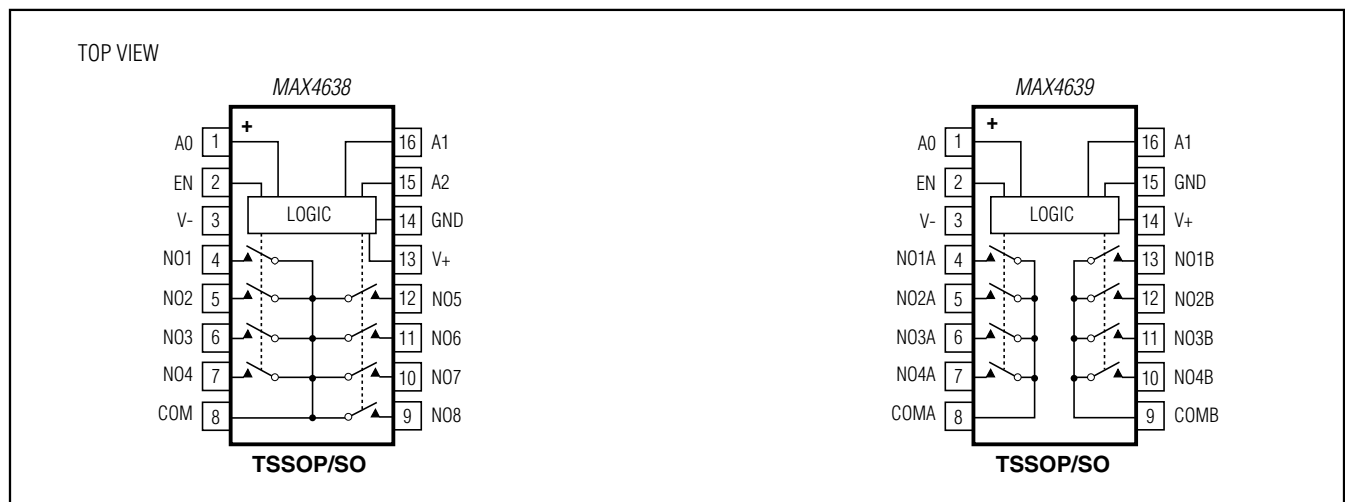

Rail-to-Rail is a registered trademark of Nippon Motorola, Ltd.

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1, Low-Voltage Analog Multiplexers

### ABSOLUTE MAXIMUM RATINGS

(Voltages Referenced to GND)

|  |                      |
|--|----------------------|
| V+ to V-   | +6V                  |
| V+, A_, EN   | -0.3V to +6V         |
| V-   | +0.3V to -6V         |
| NO_, COM_ (Note 1)                                       | -0.3V to (V+ + 0.3V) |
| Continuous Current A_, EN                                | ±30mA                |
| Continuous Current NO_, COM_                             | ±100mA               |
| Peak Current (NO_, COM_) (pulsed at 1ms, 10% duty cycle) | ±200mA               |

Continuous Power Dissipation (T<sub>A</sub> = +70°C)

|                                     |                 |
|-------------------------------------|-----------------|
| TQFN (derate 16.9mW/°C above +70°C) | 1349mW          |
| TSSOP (derate 9.4mW/°C above +70°C) | 754.7mW         |
| SO (derate 8.70mW/°C above +70°C)   | 696mW           |
| Operating Temperature Range         |                 |
| MAX463_E_E                          | -40°C to +85°C  |
| Junction Temperature                | +150°C          |
| Storage Temperature Range           | -65°C to +150°C |
| Lead Temperature (soldering, 10s)   | +300°C          |
| Soldering Temperature (reflow)      | +260°C          |

**Note 1:** Signals on COM\_, NO\_ exceeding V+ or V- are clamped by internal diodes. A\_ and EN are clamped only to V- and can exceed V+ up to their maximum ratings. Limit forward-diode current to maximum current rating.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### ELECTRICAL CHARACTERISTICS—+5V Single Supply

(V+ = +5V ±10%, V- = 0, V<sub>IH</sub> = +2.4V, V<sub>IL</sub> = +0.8V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Notes 2, 3)

| PARAMETER   | SYMBOL                               | CONDITIONS   | MIN  | TYP<br>(Note 2) | MAX   | UNITS |    |
|---|--------------------------------------|--|------|-----------------|-------|-------|----|
| <b>ANALOG SWITCH</b>                              |                                      |  |      |                 |       |       |    |
| Analog Signal Range                               | V <sub>COM_</sub> , V <sub>NO_</sub> |  | 0    |                 | V+    | V     |    |
| On-Resistance                                     | R <sub>ON</sub>                      | V+ = +4.5V, I <sub>COM_</sub> = 10mA, V <sub>NO_</sub> = +3.5V   |      | 2.5             | 3.5   | Ω     |    |
|   |                                      | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>  |      |                 | 4.5   |       |    |
| On-Resistance Match Between Channels (Notes 4, 5) | ΔR <sub>ON</sub>                     | V+ = +4.5V, I <sub>COM_</sub> = 10mA, V <sub>NO_</sub> = +3.5V   |      | 0.1             | 0.4   | Ω     |    |
|   |                                      | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>  |      |                 | 0.5   |       |    |
| On-Resistance Flatness (Note 6)                   | R <sub>FLAT(ON)</sub>                | V+ = +4.5V; I <sub>COM_</sub> = 10mA; V <sub>NO_</sub> = +1V, +2V, +3.5V   |      | 0.75            | 1     | Ω     |    |
|   |                                      | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>  |      |                 | 1.2   |       |    |
| NO_ Off-Leakage Current (Note 7)                  | I <sub>NO_(OFF)</sub>                | V+ = +5.5V; V <sub>COM_</sub> = +1V, +4.5V; V <sub>NO_</sub> = +4.5V, +1V  |      | -0.25           | ±0.01 | 0.25  | nA |
|   |                                      | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>  |      | -0.35           |       | 0.35  |    |
| COM_ Off-Leakage Current (Note 7)                 | I <sub>COM_(OFF)</sub>               | V+ = +5.5V; V <sub>COM_</sub> = +1V, +4.5V; V <sub>NO_</sub> = +4.5V, +1V  |      | -0.25           | ±0.01 | 0.25  | nA |
|   |                                      | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>  |      | -0.75           |       | 0.75  |    |
| COM_ On-Leakage Current (Note 7)                  | I <sub>COM_(ON)</sub>                | V+ = +5.5V; V <sub>COM_</sub> = +1V, +4.5V; V <sub>NO_</sub> = +1V, +4.5V, or unconnected                        |      | -0.25           | ±0.01 | 0.25  | nA |
|   |                                      | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>  |      | -0.75           |       | 0.75  |    |
| <b>DIGITAL I/O</b>                                |                                      |  |      |                 |       |       |    |
| Input Logic High                                  | V <sub>IH</sub>                      |  | 2.4  |                 |       | V     |    |
| Input Logic Low                                   | V <sub>IL</sub>                      |  |      |                 | 0.8   | V     |    |
| Input Leakage Current                             | I <sub>IH</sub> , I <sub>IL</sub>    | V <sub>IN_</sub> = 0 or V+   | -0.1 | 0.005           | 0.1   | μA    |    |
| Digital Input Capacitance                         | C <sub>IN</sub>                      |  |      | 2               |       | pF    |    |
| <b>DYNAMIC</b>                                    |                                      |  |      |                 |       |       |    |
| Transition Time (Note 7)                          | t <sub>TRANS</sub>                   | R <sub>L</sub> = 100Ω, C <sub>L</sub> = 35pF, V <sub>NO1</sub> = +3V or 0, V <sub>NO8</sub> = 0 or +3V, Figure 2 |      | 14              | 18    | ns    |    |
|   |                                      | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>  |      |                 | 20    |       |    |

# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1, Low-Voltage Analog Multiplexers

### ELECTRICAL CHARACTERISTICS—+5V Single Supply (continued)

(V+ = +5V ±10%, V- = 0, VIH = +2.4V, VIL = +0.8V, TA = TMIN to TMAX, unless otherwise noted. Typical values are at TA = +25°C.) (Notes 2, 3)

| PARAMETER                     | SYMBOL           | CONDITIONS   |                       | MIN   | TYP<br>(Note 2) | MAX | UNITS |
|-------------------------------|------------------|--|-----------------------|-------|-----------------|-----|-------|
| Break-Before-Make (Note 7)    | t <sub>BBM</sub> | RL = 100Ω, CL = 35pF,<br>VNO_ = +3V, Figure 3                      | TA = +25°C            | 8     |                 | ns  |       |
|                               |                  |  | TA = TMIN to TMAX     | 1     |                 |     |       |
| Enable Turn-On Time (Note 7)  | tON(EN)          | RL = 100Ω, CL = 35pF,<br>VNO1 = +3V, VNO2 to<br>VNO8 = 0, Figure 4 | TA = +25°C            | 14    | 18              | ns  |       |
|                               |                  |  | TA = TMIN to TMAX     | 20    |                 |     |       |
| Enable Turn-Off Time (Note 7) | tOFF(EN)         | RL = 100Ω, CL = 35pF,<br>VNO1 = +3V, VNO2 to<br>VNO8 = 0, Figure 4 | TA = +25°C            | 5     | 7               | ns  |       |
|                               |                  |  | TA = TMIN to TMAX     | 8     |                 |     |       |
| On-Channel -3dB Bandwidth     | BW               | Signal =<br>0dBm,<br>CL = 5pF,<br>50Ω in and<br>out, Figure 6      | MAX4638<br>TA = +25°C | 50    |                 | MHz |       |
|                               |                  |  | MAX4639<br>TA = +25°C | 85    |                 |     |       |
| Charge Injection              | Q                | VGEN = +2.5V, RGEN = 0,<br>CL = 1.0nF, Figure 5                    | TA = +25°C            | 13    |                 | pC  |       |
| NO_ Off-Capacitance           | CNO_(OFF)        | VNO_ = 0V, f = 1MHz,<br>Figure 8                                   | TA = +25°C            | 9     |                 | pF  |       |
| COM_ Off-Capacitance          | CCOM_(OFF)       | VCOM_ = 0V,<br>f = 1MHz,<br>Figure 8                               | MAX4638<br>TA = +25°C | 40    |                 | pF  |       |
|                               |                  |  | MAX4639<br>TA = +25°C | 20    |                 |     |       |
| Switch On-Capacitance         | C(ON)            | VCOM_ =<br>VNO_ = 0V,<br>f = 1MHz,<br>Figure 8                     | MAX4638<br>TA = +25°C | 54    |                 | pF  |       |
|                               |                  |  | MAX4639<br>TA = +25°C | 34    |                 |     |       |
| Off-Isolation (Note 8)        | VISO             | CL = 5pF, RL = 50Ω,<br>f = 1MHz, VNO_ =<br>1VRMS, Figure 6         | TA = +25°C            | -55   |                 | dB  |       |
|                               |                  |  | TA = +25°C            | -75   |                 |     |       |
| Crosstalk (Note 9)            | VCT              | CL = 5pF, RL = 50Ω,<br>f = 10MHz, VNO_ =<br>1VRMS, Figure 7        | TA = +25°C            | -65   |                 | dB  |       |
|                               |                  |  | TA = +25°C            | -85   |                 |     |       |
| Total Harmonic Distortion     | THD              | RL = 600Ω,<br>RFLAT(ON)/RL   | TA = +25°C            | 0.5   |                 | %   |       |
| <b>SUPPLY</b>                 |                  |  |                       |       |                 |     |       |
| Positive Supply Current       | I+               | V+ = +5.5V, VIN = 0 or V+  |                       | 0.001 | 1.0             | μA  |       |

MAX4638/MAX4639

# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1, Low-Voltage Analog Multiplexers

### ELECTRICAL CHARACTERISTICS—+3.0V Single Supply

(V+ = +2.7V to +3.3V, V- = 0, VIH = +2.0V, VIL = +0.4V, TA = TMIN to TMAX, unless otherwise noted. Typical values are at V+ = +3V and TA = +25°C.) (Notes 2, 3)

| PARAMETER  | SYMBOL                            | CONDITIONS  |                   | MIN   | TYP<br>(Note 2) | MAX  | UNITS |
|--|-----------------------------------|---|-------------------|-------|-----------------|------|-------|
| <b>ANALOG SWITCH</b>                                 |                                   |   |                   |       |                 |      |       |
| Analog Signal Range                                  | VCOM_,<br>VNO_                    |   |                   | 0     |                 | V+   | V     |
| On-Resistance  | RON                               | ICOM_ = 10mA,<br>VNO_ = +1.7V                                       | TA = +25°C        | 4.5   | 6               |      | Ω     |
|  |                                   |   | TA = TMIN to TMAX |       |                 | 8    |       |
| On-Resistance Match<br>Between Channels (Notes 4, 5) | ΔRON                              | ICOM_ = 10mA,<br>VNO_ = +1.7V                                       | TA = +25°C        | 0.25  | 0.6             |      | Ω     |
|  |                                   |   | TA = TMIN to TMAX |       |                 | 0.8  |       |
| On-Resistance Flatness (Note 6)                      | RFLAT(ON)                         | ICOM_ = 10mA;<br>VNO_ = +1.5V, +1.7V,<br>+1.9V                      | TA = +25°C        | 1     | 2               |      | Ω     |
|  |                                   |   | TA = TMIN to TMAX |       |                 | 2.5  |       |
| NO_ Off-Leakage Current<br>(Note 7)                  | INO_(OFF)                         | V+ = +3.3V;<br>VCOM_ = +1V, +3V; VNO_<br>= +3V, +1V                 | TA = +25°C        | -0.25 | ±0.01           | 0.25 | nA    |
|  |                                   |   | TA = TMIN to TMAX | -0.35 |                 | 0.35 |       |
| COM_ Off-Leakage Current<br>(Note 7)                 | ICOM_(OFF)                        | V+ = +3.3V;<br>VCOM_ = +1V, +3V; VNO_<br>= +3V, +1V                 | TA = +25°C        | -0.25 | ±0.01           | 0.25 | nA    |
|  |                                   |   | TA = TMIN to TMAX | -0.35 |                 | 0.35 |       |
| COM_ On-Leakage Current<br>(Note 7)                  | ICOM_(ON)                         | V+ = +3.3V; VCOM_ =<br>+1V, +3V; VNO_ = +1V,<br>+3V, or unconnected | TA = +25°C        | -0.25 | ±0.01           | 0.25 | nA    |
|  |                                   |   | TA = TMIN to TMAX | -0.35 |                 | 0.35 |       |
| <b>DIGITAL I/O</b>                                   |                                   |   |                   |       |                 |      |       |
| Input Logic High                                     | VIH                               |   |                   | 2.0   |                 |      | V     |
| Input Logic Low                                      | VIL                               |   |                   |       |                 | 0.4  | V     |
| Input Leakage Current                                | I <sub>IH</sub> , I <sub>IL</sub> | VIN_ = 0 or V+  |                   | -0.1  | 0.005           | 0.1  | μA    |
| Digital Input Capacitance                            | CIN                               |   |                   |       | 2               |      | pF    |
| <b>DYNAMIC</b>                                       |                                   |   |                   |       |                 |      |       |
| Transition Time (Note 7)                             | tTRANS                            | VNO_ = +2V, CL = 35pF,<br>RL = 100Ω, Figure 2                       | TA = +25°C        | 16    | 20              |      | ns    |
|  |                                   |   | TA = TMIN to TMAX |       |                 | 24   |       |
| Break-Before-Make (Note 7)                           | tBBM                              | VNO_ = +2V, CL = 35pF,<br>RL = 100Ω, Figure 3                       | TA = +25°C        | 8     |                 |      | ns    |
|  |                                   |   | TA = TMIN to TMAX | 1     |                 |      |       |
| Enable Turn-On Time (Note 7)                         | tON(EN)                           | VNO_ = +2V, CL = 35pF,<br>RL = 100Ω, Figure 4                       | TA = +25°C        | 15    | 20              |      | ns    |
|  |                                   |   | TA = TMIN to TMAX |       |                 | 24   |       |
| Enable Turn-Off Time (Note 7)                        | tOFF(EN)                          | VNO_ = +2V, CL = 35pF,<br>RL = 100Ω, Figure 4                       | TA = +25°C        | 5     | 9               |      | ns    |
|  |                                   |   | TA = TMIN to TMAX |       |                 | 10   |       |

# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1, Low-Voltage Analog Multiplexers

### ELECTRICAL CHARACTERISTICS—+3.0V Single Supply (continued)

(V+ = +2.7V to +3.3V, V- = 0, V<sub>IH</sub> = +2.0V, V<sub>IL</sub> = +0.4V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at V+ = +3V and T<sub>A</sub> = +25°C.) (Notes 2, 3)

| PARAMETER                 | SYMBOL                 | CONDITIONS  |                        | MIN                    | TYP<br>(Note 2) | MAX | UNITS |
|---------------------------|------------------------|---|------------------------|------------------------|-----------------|-----|-------|
| Off-Isolation (Note 8)    | V <sub>ISO</sub>       | C <sub>L</sub> = 5pF, R <sub>L</sub> = 50Ω,<br>f = 10MHz,<br>V <sub>NO-</sub> = +1V <sub>RMS</sub> , Figure 6 | T <sub>A</sub> = +25°C |                        | 55              |     | dB    |
|                           |                        | C <sub>L</sub> = 5pF, R <sub>L</sub> = 50Ω,<br>f = 1MHz, V <sub>NO-</sub> = 1V <sub>RMS</sub> ,<br>Figure 6   | T <sub>A</sub> = +25°C |                        | -75             |     |       |
| Crosstalk (Note 9)        | V <sub>CT</sub>        | C <sub>L</sub> = 5pF, R <sub>L</sub> = 50Ω,<br>f = 10MHz, V <sub>NO-</sub> = 1V <sub>RMS</sub> ,<br>Figure 7  | T <sub>A</sub> = +25°C |                        | -65             |     | dB    |
|                           |                        | C <sub>L</sub> = 5pF, R <sub>L</sub> = 50Ω,<br>f = 1MHz, V <sub>NO-</sub> = 1V <sub>RMS</sub> ,<br>Figure 7   | T <sub>A</sub> = +25°C |                        | -85             |     |       |
| On-Channel -3dB Bandwidth | BW                     | Signal =<br>0dBm, 50Ω in<br>and out,<br>Figure 6  | MAX4638                | T <sub>A</sub> = +25°C |                 | 50  | MHz   |
|                           |                        |   | MAX4639                | T <sub>A</sub> = +25°C |                 | 85  |       |
| NO- Off-Capacitance       | C <sub>NO-(OFF)</sub>  | V <sub>NO-</sub> = 0V, f = 1MHz,<br>Figure 8  | T <sub>A</sub> = +25°C |                        | 9               |     | pF    |
| COM- Off-Capacitance      | C <sub>COM-(OFF)</sub> | V <sub>COM-</sub> = 0V,<br>f = 1MHz,<br>Figure 8  | MAX4638                | T <sub>A</sub> = +25°C |                 | 40  | pF    |
|                           |                        |   | MAX4639                | T <sub>A</sub> = +25°C |                 | 20  |       |
| Switch On-Capacitance     | C <sub>(ON)</sub>      | V <sub>COM-</sub> = V <sub>NO-</sub><br>= 0V,<br>f = 1MHz,<br>Figure 8  | MAX4638                | T <sub>A</sub> = +25°C |                 | 54  | pF    |
|                           |                        |   | MAX4639                | T <sub>A</sub> = +25°C |                 | 34  |       |
| <b>SUPPLY</b>             |                        |   |                        |                        |                 |     |       |
| Positive Supply Current   | I+                     | V+ = +3.3V, V <sub>IN-</sub> = 0 or V+  |                        |                        | 0.001           | 1   | μA    |

### ELECTRICAL CHARACTERISTICS—±2.5V Dual Supplies

(V+ = +2.5 ±10%, V- = -2.5 ±10%, V<sub>IH</sub> = +2.0V, V<sub>IL</sub> = +0.4V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at V± = ±2.5V and T<sub>A</sub> = +25°C.) (Notes 2, 3)

| PARAMETER  | SYMBOL                                  | CONDITIONS  |   | MIN | TYP<br>(Note 2) | MAX | UNITS |
|--|---|---|---|-----|-----------------|-----|-------|
| <b>ANALOG SWITCH</b>                                 |   |   |   |     |                 |     |       |
| Analog Signal Range                                  | V <sub>COM-</sub> ,<br>V <sub>NO-</sub> |   |   | V-  |                 | V+  | V     |
| On-Resistance  | R <sub>ON</sub>                         | I <sub>COM-</sub> = 10mA, V <sub>NO-</sub> = ±1.5V,<br>V+ = +2.25V, V- = -2.25V | T <sub>A</sub> = +25°C                                |     | 2.5             | 3.5 | Ω     |
|  |   |   | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> |     |                 | 4.5 |       |
| On-Resistance Match<br>Between Channels (Notes 4, 5) | ΔR <sub>ON</sub>                        | I <sub>COM-</sub> = 10mA, V <sub>NO-</sub> = ±1.5V,<br>V+ = +2.25V, V- = -2.25V | T <sub>A</sub> = +25°C                                |     | 0.2             | 0.4 | Ω     |
|  |   |   | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> |     |                 | 0.5 |       |

# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1, Low-Voltage Analog Multiplexers

### ELECTRICAL CHARACTERISTICS—±2.5V Dual Supplies (continued)

(V+ = +2.5 ±10%, V- = -2.5V ±10%, VIH = +2.0V, VIL = +0.4V, TA = TMIN to TMAX, unless otherwise noted. Typical values are at V± = ±2.5V and TA = +25°C.) (Notes 2, 3)

| PARAMETER                            | SYMBOL                  | CONDITIONS   | MIN                                       | TYP<br>(Note 2) | MAX   | UNITS |    |
|--------------------------------------|-------------------------|--|---|-----------------|-------|-------|----|
| On-Resistance Flatness<br>(Note 6)   | R <sub>FLAT(ON)</sub>   | I <sub>COM_</sub> = 10mA; V <sub>NO_</sub> = ±1.5V, 0; V+ = +2.25V; V- = -2.25V                                | TA = +25°C                                | 0.75            | 1     | Ω     |    |
|                                      |                         |  | TA = T <sub>MIN</sub> to T <sub>MAX</sub> |                 | 1.2   |       |    |
| NO_ Off-Leakage<br>Current (Note 7)  | I <sub>NO_ (OFF)</sub>  | V+ = +2.75V; V- = -2.75V;<br>V <sub>COM_</sub> = +1V, +2.5V;<br>V <sub>NO_</sub> = +2.5V, +1V                  | TA = +25°C                                | -0.25           | ±0.01 | 0.25  | nA |
|                                      |                         |  | TA = T <sub>MIN</sub> to T <sub>MAX</sub> | -0.35           |       | 0.35  |    |
| COM_ Off-Leakage<br>Current (Note 7) | I <sub>COM_ (OFF)</sub> | V+ = +2.75V; V- = -2.75V;<br>V <sub>COM_</sub> = +1V, +2.5V;<br>V <sub>NO_</sub> = +2.5V, +1V                  | TA = +25°C                                | -0.25           | ±0.01 | 0.25  | nA |
|                                      |                         |  | TA = T <sub>MIN</sub> to T <sub>MAX</sub> | -0.35           |       | 0.35  |    |
| COM_ On-Leakage<br>Current (Note 7)  | I <sub>COM_ (ON)</sub>  | V+ = +2.5V; V- = -2.5V;<br>V <sub>COM_</sub> = +1V, +2.5V;<br>V <sub>NO_</sub> = +1V, +2.5V,<br>or unconnected | TA = +25°C                                | -0.25           | ±0.01 | 0.25  | nA |
|                                      |                         |  | TA = T <sub>MIN</sub> to T <sub>MAX</sub> | -0.35           |       | 0.35  |    |
| <b>DIGITAL I/O</b>                   |                         |  |   |                 |       |       |    |
| Input Logic High                     | VIH                     |  | 2.0                                       |                 |       | V     |    |
| Input Logic Low                      | VIL                     |  |   |                 | 0.4   | V     |    |
| Input Leakage Current                | I <sub>IH, IIL</sub>    | V <sub>IN_</sub> = 0 or V+   | -0.1                                      | 0.005           | 0.1   | μA    |    |
| Digital Input Capacitance            | C <sub>IN</sub>         |  |   | 2               |       | pF    |    |
| <b>DYNAMIC</b>                       |                         |  |   |                 |       |       |    |
| Transition Time (Note 7)             | t <sub>TRANS</sub>      | V <sub>NO_</sub> = +1.2V, C <sub>L</sub> = 35pF,<br>R <sub>L</sub> = 100Ω, Figure 2                            | TA = +25°C                                | 16              | 20    | ns    |    |
|                                      |                         |  | TA = T <sub>MIN</sub> to T <sub>MAX</sub> |                 | 24    |       |    |
| Enable Turn-On Time<br>(Note 7)      | t <sub>ON(EN)</sub>     | V <sub>NO_</sub> = +1.2V, C <sub>L</sub> = 35pF,<br>R <sub>L</sub> = 100Ω, Figure 4                            | TA = +25°C                                | 14              | 18    | ns    |    |
|                                      |                         |  | TA = T <sub>MIN</sub> to T <sub>MAX</sub> |                 | 20    |       |    |
| Enable Turn-Off Time<br>(Note 7)     | t <sub>OFF(EN)</sub>    | V <sub>NO_</sub> = +1.2V, C <sub>L</sub> = 35pF,<br>R <sub>L</sub> = 100Ω, Figure 4                            | TA = +25°C                                | 5               | 7     | ns    |    |
|                                      |                         |  | TA = T <sub>MIN</sub> to T <sub>MAX</sub> |                 | 8     |       |    |
| Break-Before-Make (Note 7)           | t <sub>BBM</sub>        | V <sub>NO_</sub> = +1.2V, C <sub>L</sub> = 35pF,<br>R <sub>L</sub> = 100Ω, Figure 3                            | TA = +25°C                                | 8               |       | ns    |    |
|                                      |                         |  | TA = T <sub>MIN</sub> to T <sub>MAX</sub> | 1               |       |       |    |

**Note 2:** The algebraic convention, where the most negative value is a minimum and the most positive value a maximum, is used in this data sheet.

**Note 3:** Parts are tested at +85°C and guaranteed by design over the entire temperature range.

**Note 4:** ΔRON = RON(MAX) - RON(MIN).

**Note 5:** ΔRON matching specifications for TQFN packaged parts are guaranteed by design.

**Note 6:** Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal ranges.

**Note 7:** Guaranteed by design.

**Note 8:** Off-Isolation = 20log<sub>10</sub> (V<sub>COM\_</sub> / V<sub>NO\_</sub>), V<sub>COM\_</sub> = output, V<sub>NO\_</sub> = input to off switch.


**Note 9:** Between any two switches.

# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1, Low-Voltage Analog Multiplexers

### Typical Operating Characteristics

(V+ = +5V, V- = 0V, T<sub>A</sub> = +25°C, unless otherwise noted.)

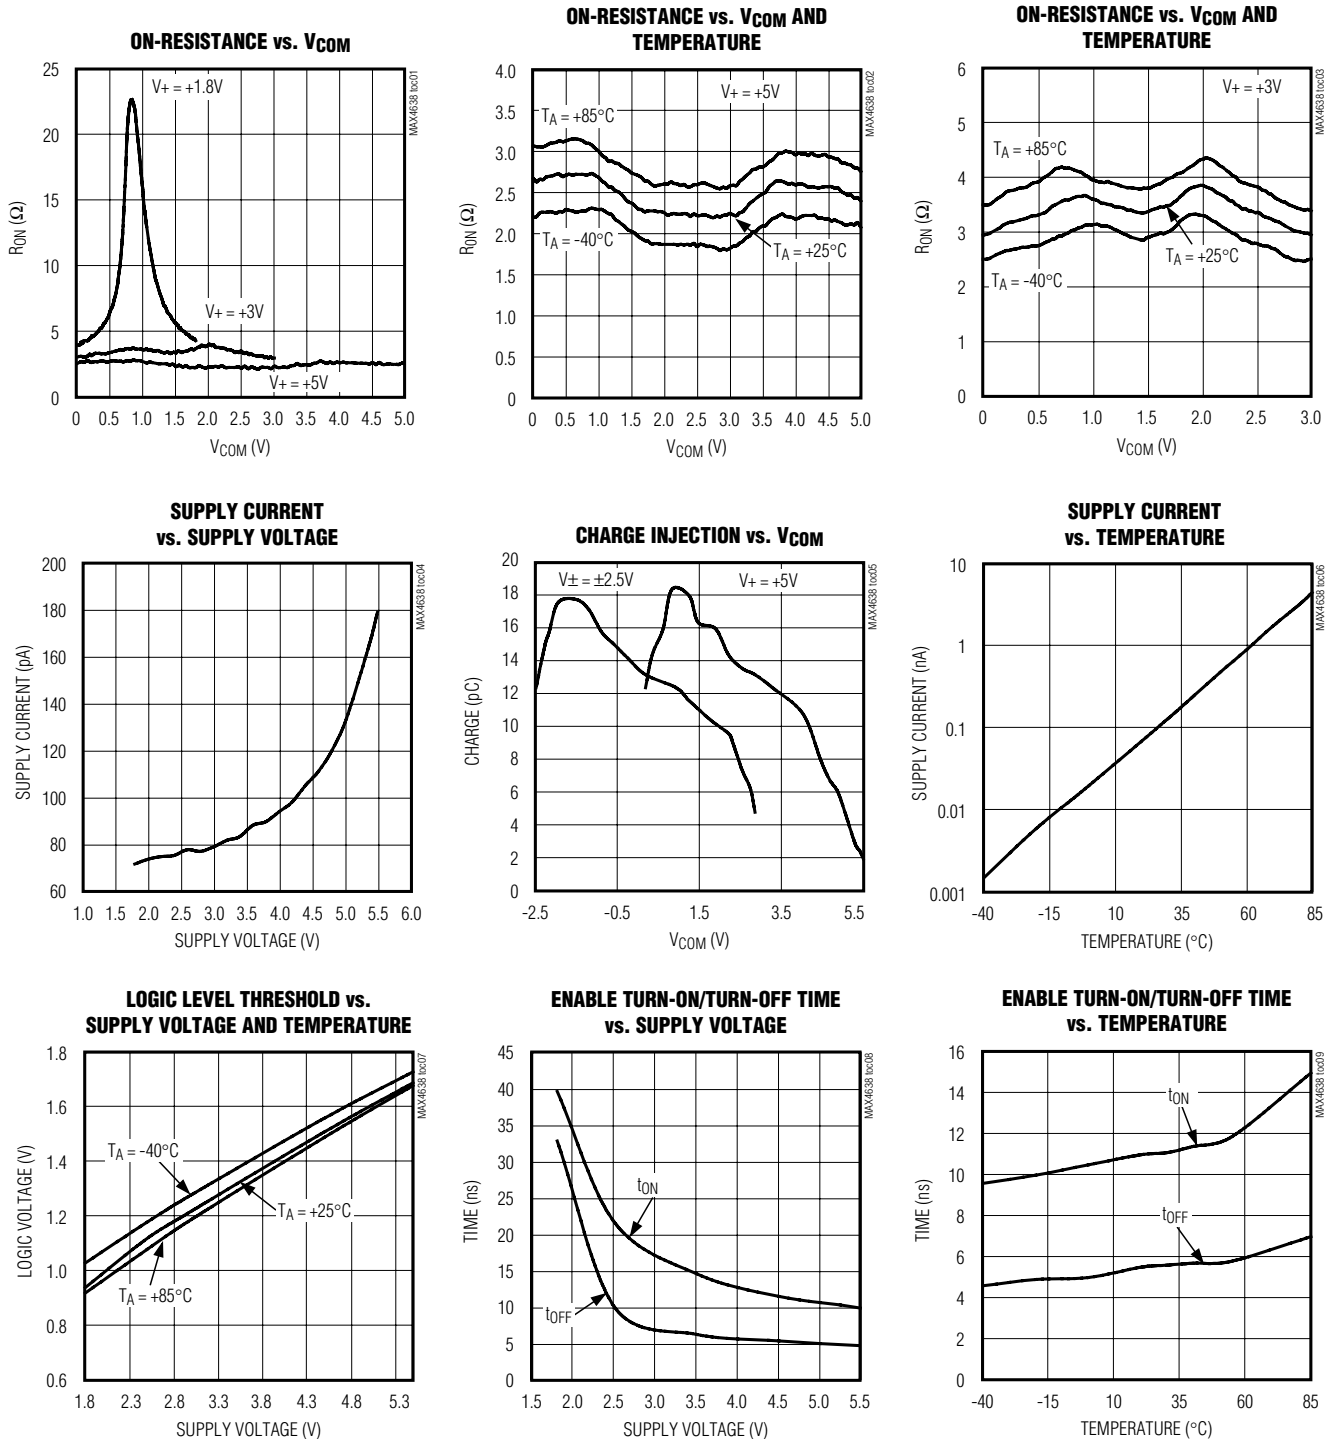


# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1, Low-Voltage Analog Multiplexers

### Typical Operating Characteristics (continued)

(V+ = +5V, V- = 0V, T<sub>A</sub> = +25°C, unless otherwise noted.)

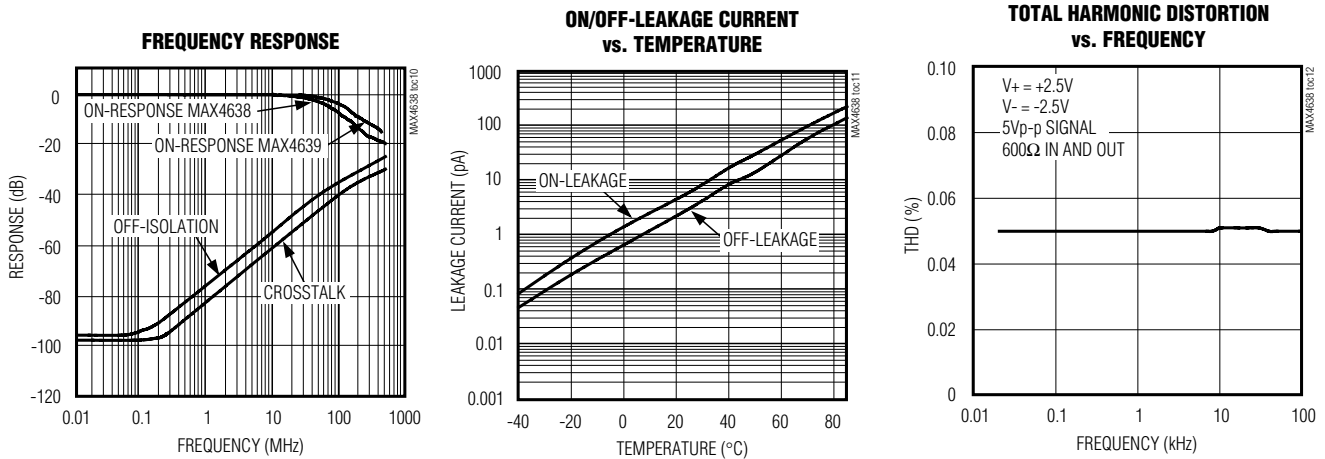

### Pin Description

| PIN       |            |              |         |         |               | NAME       | FUNCTION                                   |
|-----------|------------|--------------|---------|---------|---------------|------------|--|
| MAX4638   |            |              | MAX4639 |         |               |            |  |
| DIP/SO    | TQFN-EP    |              | DIP/SO  | TQFN-EP |               |            |  |
|           | 16-PIN     | 20-PIN       |         | 16-PIN  | 20-PIN        |            |  |
| 1, 15, 16 | 15, 13, 14 | 19, 18, 17   | —       | —       | —             | A0, A2, A1 | Address Inputs                             |
| —         | —          | —            | 1, 16   | 15, 14  | 19, 17        | A0, A1     | Address Inputs                             |
| 2         | 16         | 1            | 2       | 16      | 1             | EN         | Enable                                     |
| 3         | 1          | 2            | 3       | 1       | 2             | V-         | Negative-Supply Voltage Input              |
| 4-7       | 2-5        | 3-6          | —       | —       | —             | NO1-NO4    | Bidirectional Analog Inputs                |
| —         | —          | —            | 4-7     | 2-5     | 3-6           | NO1A-NO4A  | Bidirectional Analog Inputs                |
| 8         | 6          | 7            | —       | —       | —             | COM        | Bidirectional Analog outputs               |
| —         | —          | —            | 8, 9    | 6, 7    | 7, 9          | COMA, COMB | Bidirectional Analog outputs               |
| 9-12      | 7-10       | 10-13        | —       | —       | —             | NO8-NO5    | Bidirectional Analog Inputs                |
| —         | —          | —            | 10-13   | 8-11    | 10-13         | NO4B-NO1B  | Bidirectional Analog Inputs                |
| 13        | 11         | 14           | 14      | 12      | 14            | V+         | Positive-Supply Voltage Input              |
| 14        | 12         | 15           | 15      | 13      | 15            | GND        | Ground                                     |
| —         | —          | 8, 9, 16, 20 | —       | —       | 8, 16, 18, 20 | N.C.       | No Connection. Not internally connected.   |
| —         | —          | —            | —       | —       | —             | EP         | Exposed Pad (TQFN Only). Connect EP to V-. |



# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1, Low-Voltage Analog Multiplexers

### Detailed Description

The MAX4638/MAX4639 are low-voltage, CMOS analog muxes. The MAX4638 is an 8:1 mux that switches one of eight inputs (NO1–NO8) to a common output (COM) as determined by the 3-bit binary inputs A0, A1, and A2. The MAX4639 is a 4:1 dual mux that switches one of four differential inputs to a common differential output as determined by the 2-bit binary inputs A0 and A1. Both the MAX4638/MAX4639 have an EN input that can be used to enable or disable the device. When disabled, all channels are switched off. See Truth Tables.

### Applications Information

#### Overvoltage Protection

Proper power-supply sequencing is recommended for all CMOS devices. Do not exceed the absolute maximum ratings because stresses beyond the listed ratings can cause permanent damage to the devices. Always sequence V+ on first, then V-, followed by the logic inputs. If power-supply sequencing is not possible, add two small-signal diodes (D1, D2) in series with the supply pins for overvoltage protection (Figure 1). Adding diodes reduces the analog signal range to one diode drop below V+ and one diode drop above V-, but

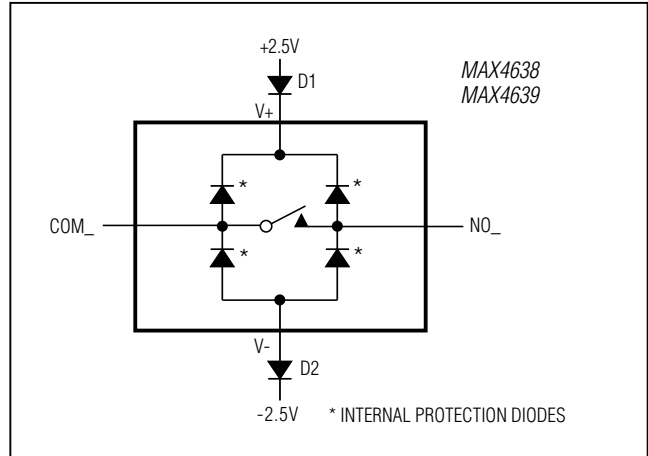


Figure 1. Overvoltage Protection Using External Blocking Diodes

does not affect the devices' low switch resistance. Device operation is unchanged, and the difference between V+ and V- should not exceed 6V. These protection diodes are not recommended when using a single supply. For single-supply operation, V- should be connected to GND as close to the device as possible.

### Truth Tables

#### MAX4638 (Single 8-to-1 Mux)

| A2 | A1 | A0 | EN | ON SWITCH |
|----|----|----|----|-----------|
| X  | X  | X  | 0  | None      |
| 0  | 0  | 0  | 1  | NO1       |
| 0  | 0  | 1  | 1  | NO2       |
| 0  | 1  | 0  | 1  | NO3       |
| 0  | 1  | 1  | 1  | NO4       |
| 1  | 0  | 0  | 1  | NO5       |
| 1  | 0  | 1  | 1  | NO6       |
| 1  | 1  | 0  | 1  | NO7       |
| 1  | 1  | 1  | 1  | NO8       |

#### MAX4639 (Dual 4-to-1 Mux)

| A1 | A0 | EN | COMA | COMB |
|----|----|----|------|------|
| X  | X  | 0  | None | None |
| 0  | 0  | 1  | NO1A | NO1B |
| 0  | 1  | 1  | NO2A | NO2B |
| 1  | 0  | 1  | NO3A | NO3B |
| 1  | 1  | 1  | NO4A | NO4B |

# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1, Low-Voltage Analog Multiplexers

### Test Circuits/Timing Diagrams

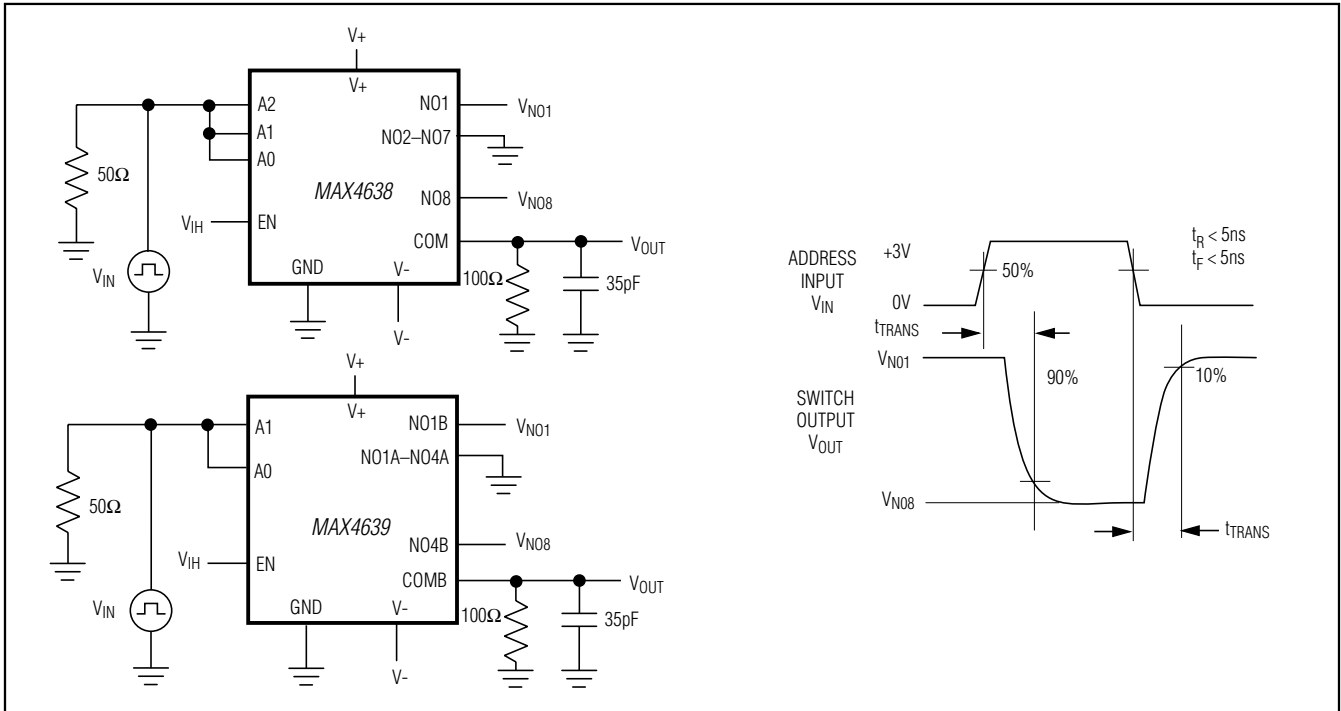


Figure 2. Transition Time

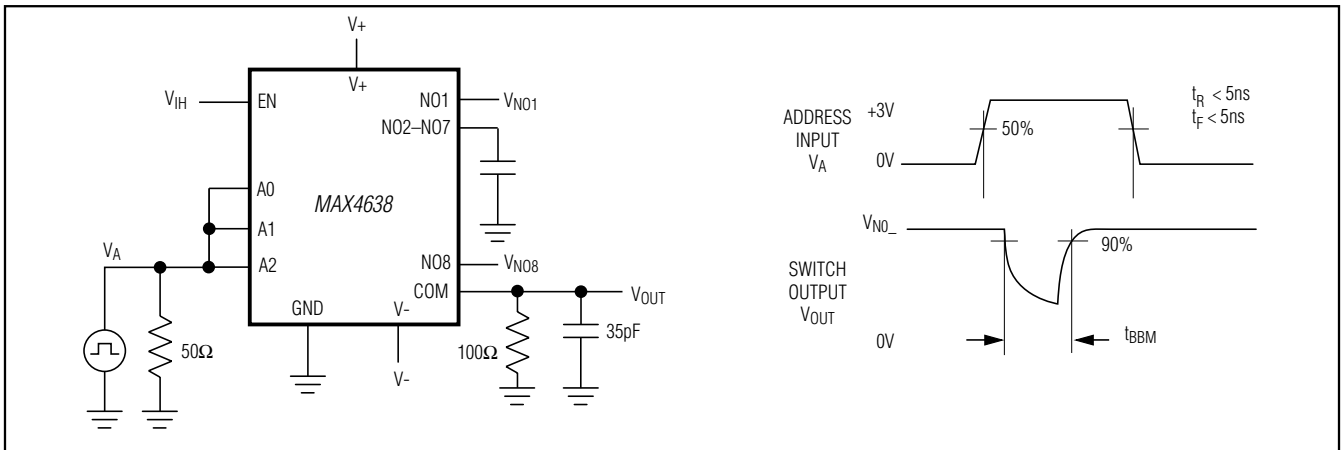


Figure 3. MAX4638 Break-Before-Make Interval

# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1, Low-Voltage Analog Multiplexers

### Test Circuits/Timing Diagrams (continued)

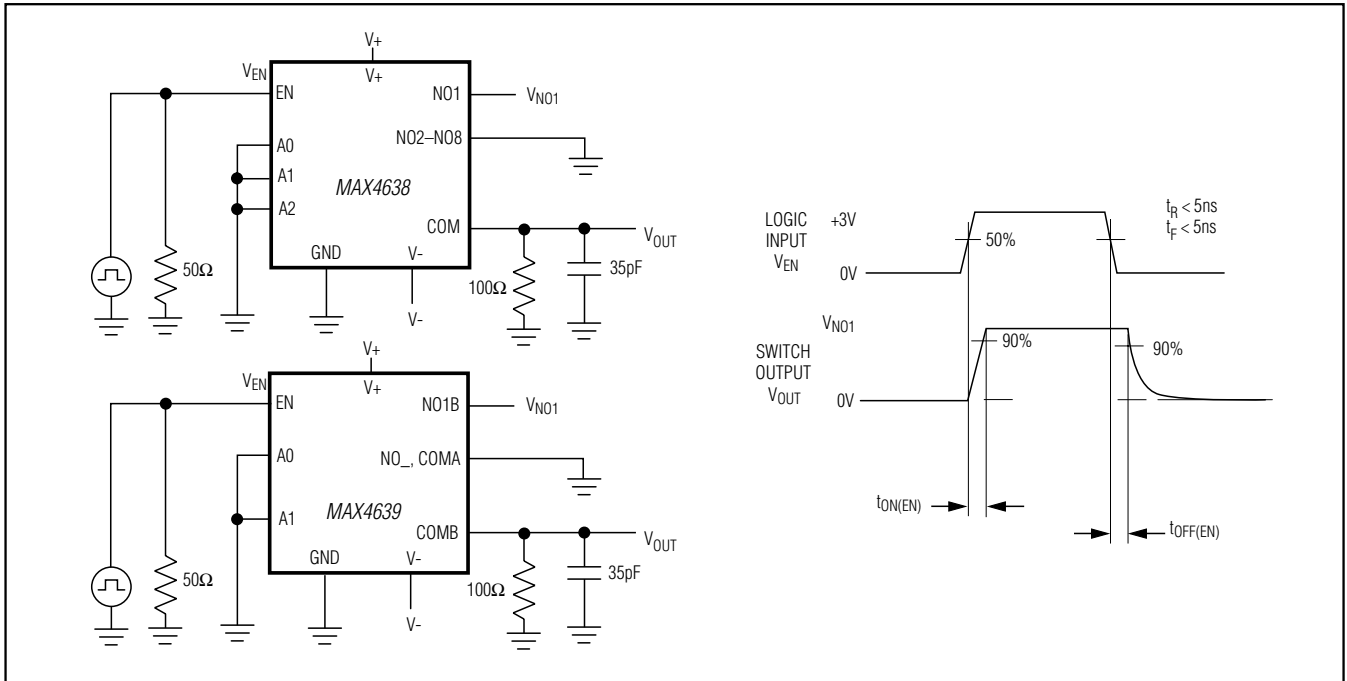


Figure 4. Enable Switching Time

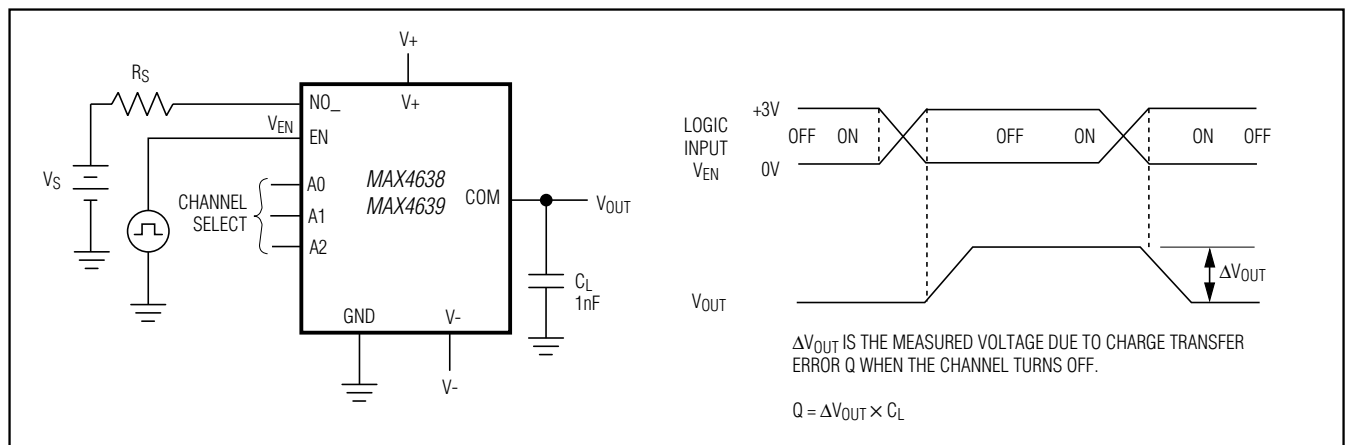


Figure 5. Charge Injection

# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1, Low-Voltage Analog Multiplexers

### Test Circuits/Timing Diagrams (continued)

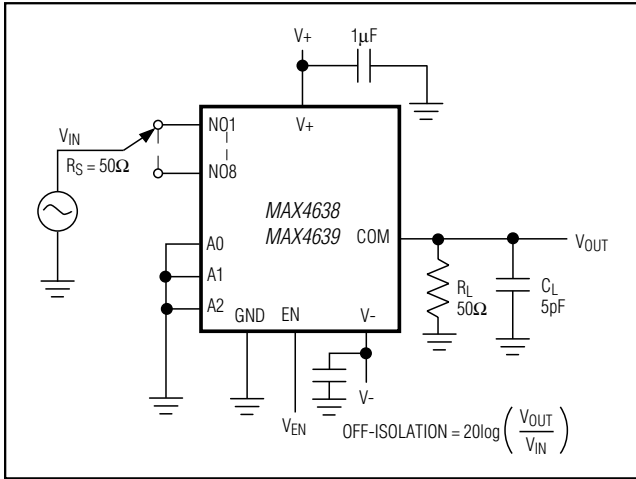


Figure 6. Off-Isolation/On-Channel Bandwidth

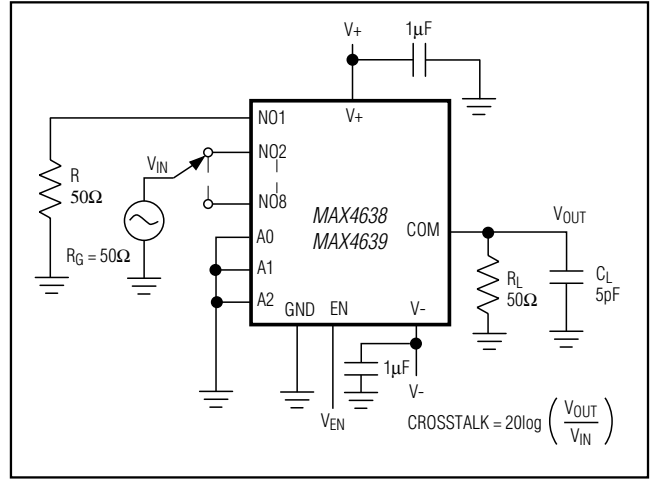


Figure 7. Crosstalk


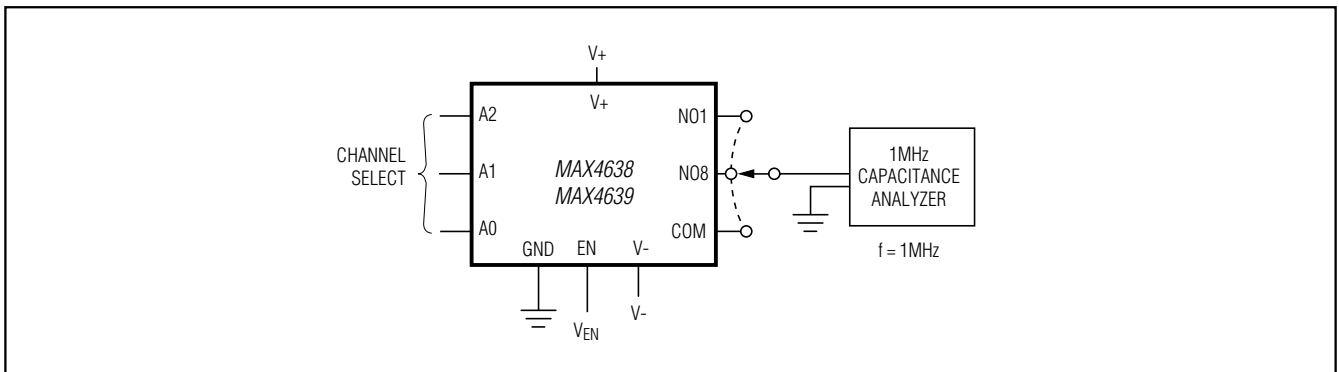


Figure 8. Channel Off/On-Capacitance

# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1, Low-Voltage Analog Multiplexers

### Pin Configurations (continued)

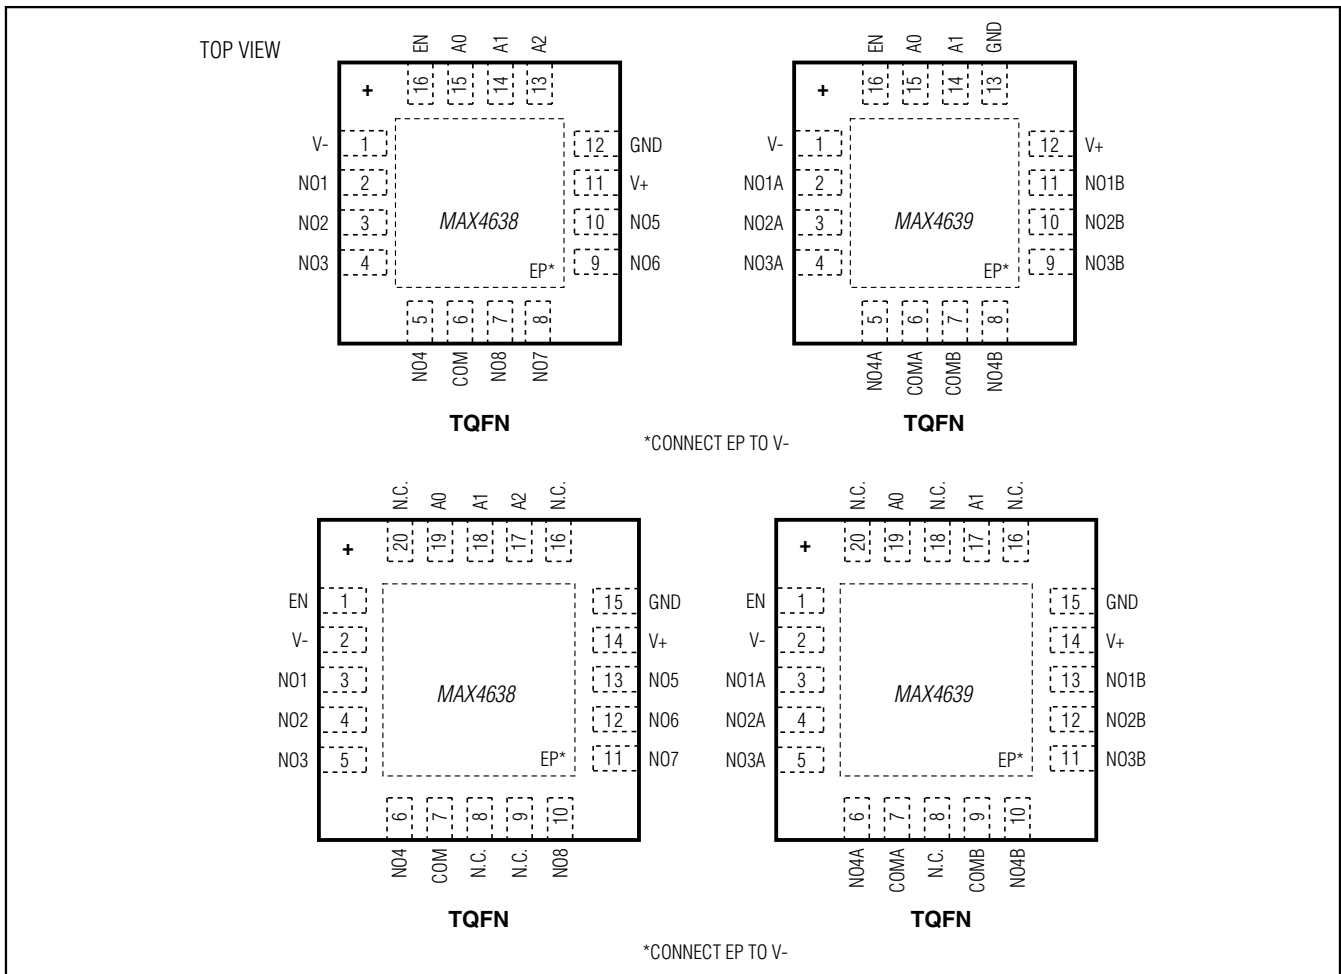

### Ordering Information (continued)

| PART         | TEMP RANGE     | PIN-PACKAGE         |
|--------------|----------------|---------------------|
| MAX4639ETE+T | -40°C to +85°C | 16 TQFN-EP* (4 × 4) |
| MAX4639EUE+T | -40°C to +85°C | 16 TSSOP            |
| MAX4639ESE+T | -40°C to +85°C | 16 SO               |
| MAX4639ETP+T | -40°C to +85°C | 20 TQFN-EP* (4 × 4) |

+Denotes a lead(Pb)-free/RoHS-compliant package.

T = Tape and reel.

\*EP = Exposed pad.

### Chip Information

PROCESS: BiCMOS

### Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 16 TQFN      | T1644+4      | <a href="#">21-0139</a> | <a href="#">90-0070</a> |
| 20 TQFN      | T1644+3      | <a href="#">21-0139</a> | <a href="#">90-0069</a> |
| 16 TSSOP     | U16+2        | <a href="#">21-0066</a> | <a href="#">90-0117</a> |
| 16 SO        | S16+3        | <a href="#">21-0041</a> | <a href="#">90-0097</a> |

# MAX4638/MAX4639

## 3.5Ω, Single 8:1 and Dual 4:1,Z Low-Voltage Analog Multiplexers

### Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION   | PAGES CHANGED |
|-----------------|---------------|---|---------------|
| 2               | 9/10          | —   | —             |
| 3               | 10/12         | Added RoHS ordering information throughout data sheet | 1–16          |



Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.