


CMOS 8-bit Single Chip Microcomputer

Description

CXP84332/84340 is a CMOS 8-bit single chip microcomputer integrating on a single chip an A/D converter, serial interface, timer/counter, time base timer, capture timer/counter, remote control reception circuit, and the like besides the basic configurations of 8-bit CPU, ROM, RAM, and I/O port.

The CXP84332/84340 also provides a power-on reset function and a sleep/stop function that enables lower power consumption.

80 pin QFP (Plastic)



Features


- Wide-range instruction system (213 instructions) to cover various types of data
 - 16-bit arithmetic/multiplication and division/boolean bit operation instructions
- Minimum instruction cycle
 - 400ns at 10MHz operation
 - 122μs at 32kHz operation
- Incorporated ROM capacity
 - 32K bytes (CXP84332)
 - 40K bytes (CXP84340)
- Incorporated RAM capacity
 - 1120 bytes
- Peripheral functions
 - A/D converter
 - 8 bits, 8 channels, successive approximation method
 - (Conversion time of 32μs/10MHz)
 - Serial interface
 - Incorporated 8-bit, 8-stage FIFO
 - (Auto transfer for 1 to 8 bytes), 1 channel
 - 8-bit clock synchronization, 1 channel
 - Timers
 - 8-bit timer
 - 8-bit timer/counter
 - 19-bit time base timer
 - 16-bit capture timer/counter
 - 32kHz timer/counter
 - Remote control reception circuit
 - 8-bit pulse measuring counter, 6-stage FIFO
 - PWM output
 - 14 bits, 1 channel
- Interruption
 - 15 factors, 15 vectors, multi-interruption possible
- Standby mode
 - Sleep/stop
- Package
 - 80-pin plastic QFP
- Piggyback/evaluation chip
 - CXP84300 80-pin ceramic QFP

Structure


Silicon gate CMOS IC

Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.

Block Diagram

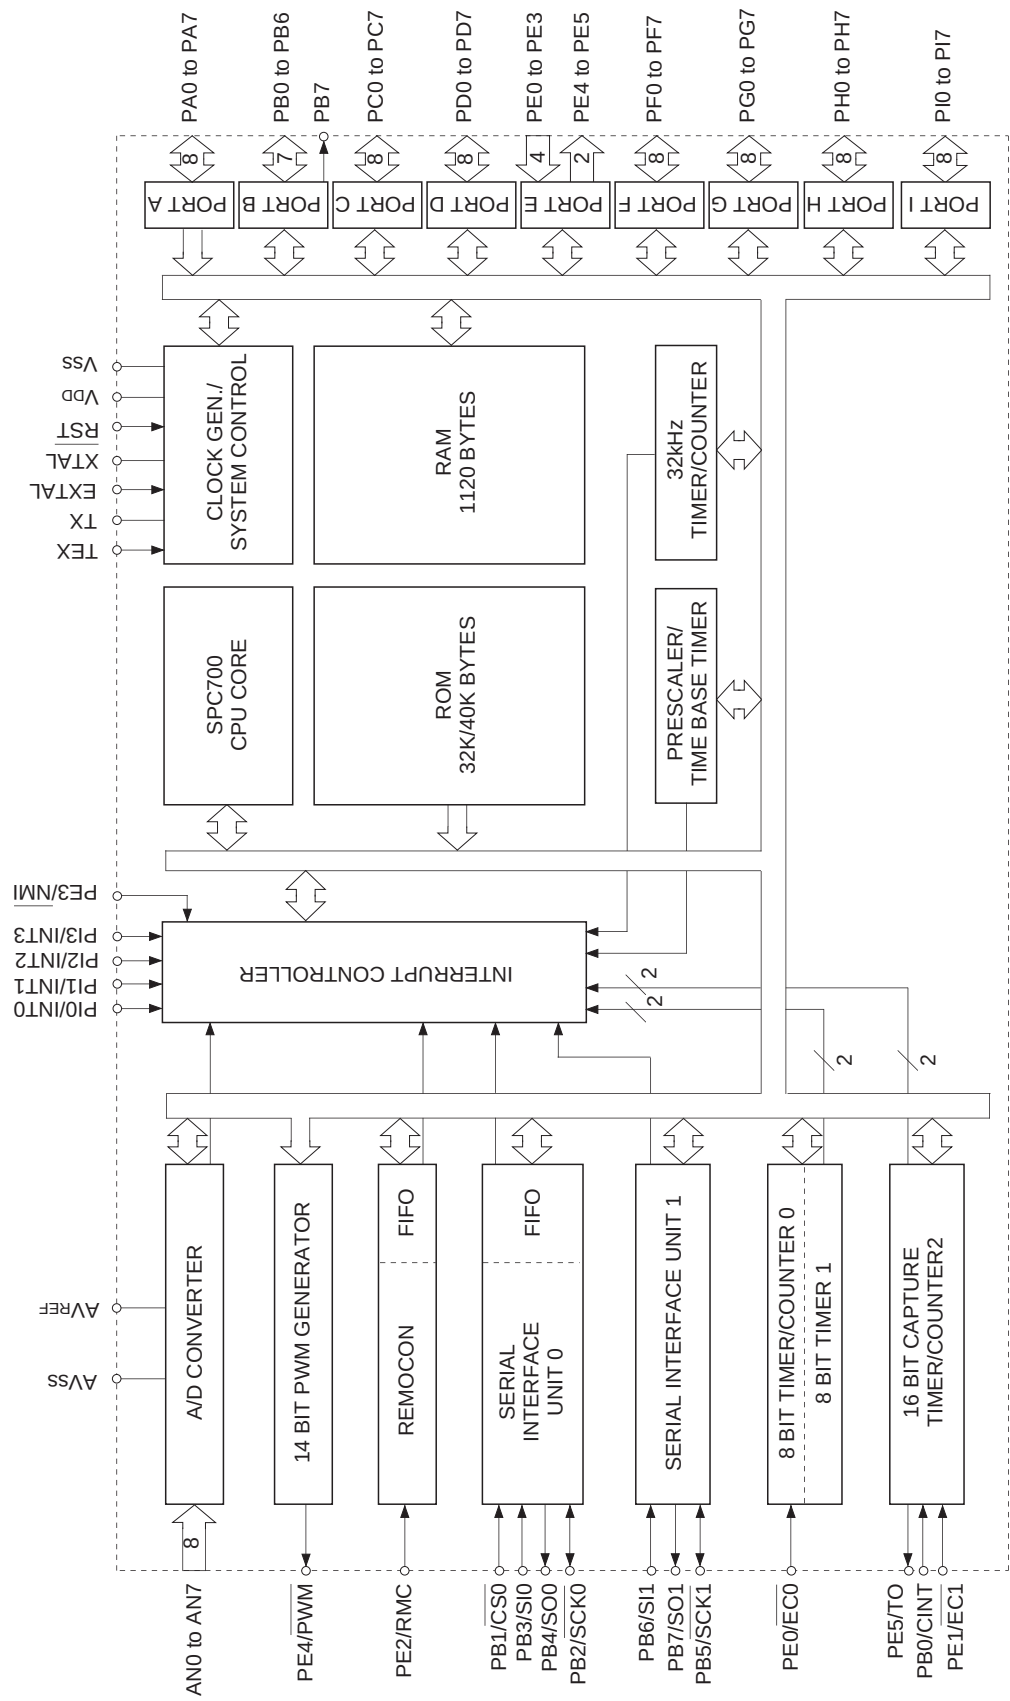

Pin Assignment (Top View)

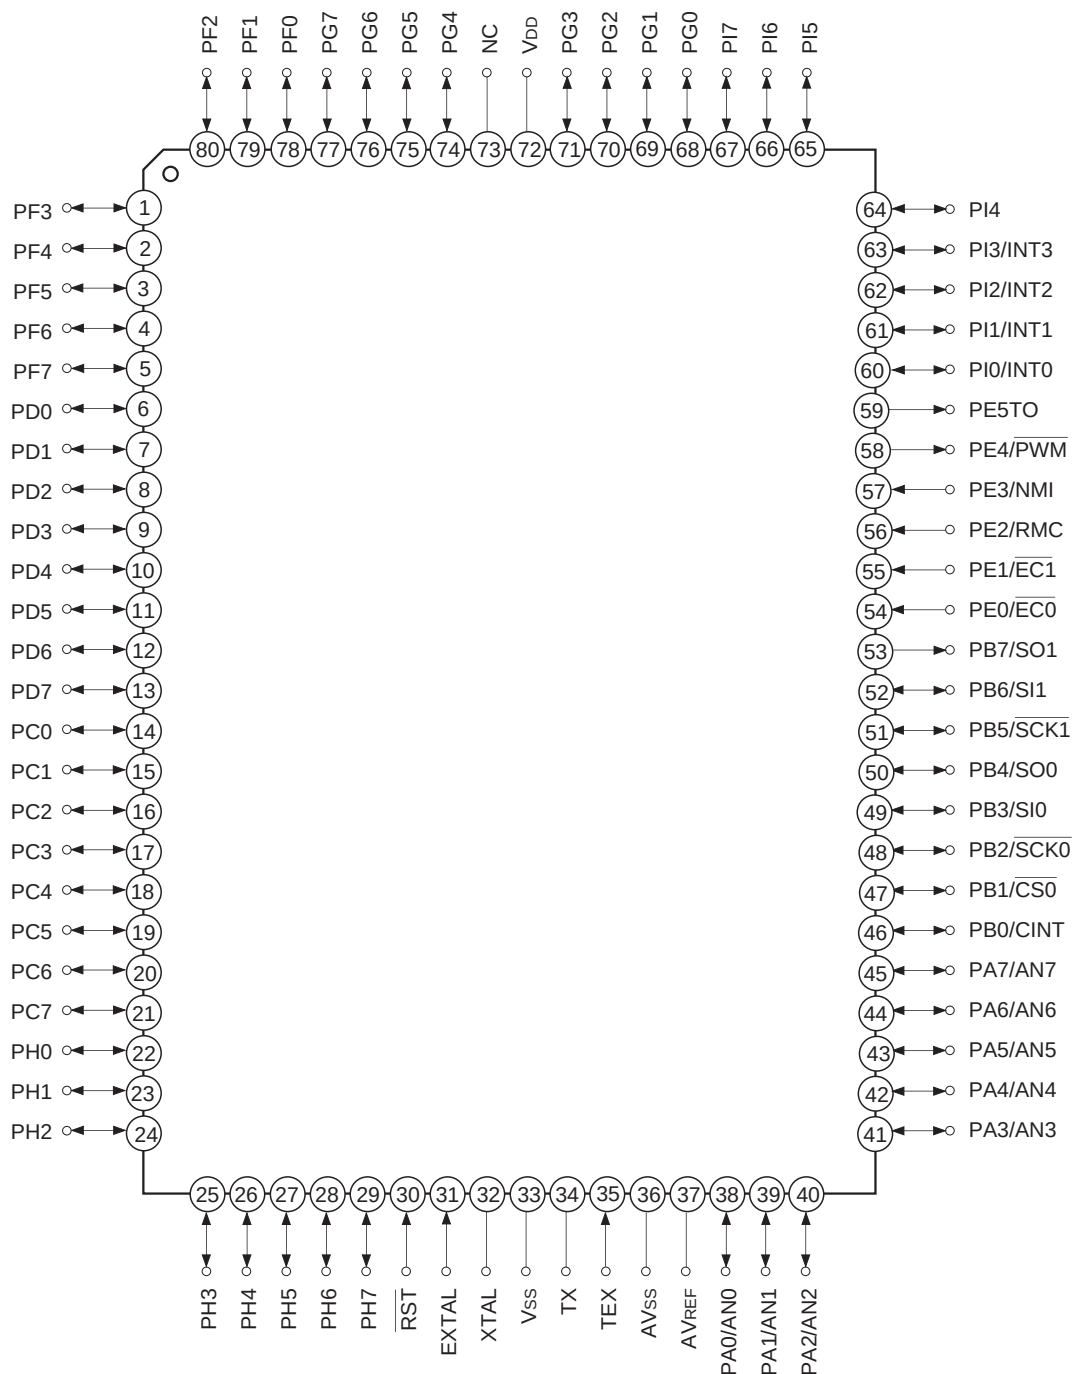

Note) NC (Pin 73) must be connected to V_{DD}.

Pin Description




Symbol	I/O	Description	
PA0/AN0 to PA7/AN7	I/O/Analog input	(Port A) 8-bit I/O port. I/O can be set in a unit of single bits. Incorporation of the pull-up resistance can be set through the software in a unit of 4 bits. (8 pins)	Analog inputs to A/D converter. (8 pins)
PB0/CINT	I/O/Input	(Port B) Lower 7-bit I/O port in which I/O can be set in a unit of single bits. Also, an uppermost bit (PB7) exclusively for output. Incorporation of pull-up resistor can be set through the software in a unit of 4 bits. (8 pins)	External capture input to 16-bit timer/counter.
PB1/ $\overline{\text{CS0}}$	I/O/Input		Chip select input for serial interface (CH0).
PB2/ $\overline{\text{SCK0}}$	I/O/I/O		Serial clock I/O (CH0).
PB3/SI0	I/O/Input		Serial data input (CH0).
PB4/SO0	I/O/Output		Serial data output (CH0).
PB5/ $\overline{\text{SCK1}}$	I/O/I/O		Serial clock I/O (CH1).
PB6/SI1	I/O/Input		Serial data input (CH1).
PB7/SO1	Output/Output		Serial data output (CH1).
PC0 to PC7	I/O	(Port C) 8-bit I/O port. I/O can be set in a unit of single bits. Capable of driving 12mA sink current. Incorporation of pull-up resistor can be set through the software in a unit of 4 bits. (8 pins)	
PD0 to PD7	I/O	(Port D) 8-bit I/O port. I/O can be set in a unit of single bits. Incorporation of pull-up resistor can be set through the software in a unit of 4 bits. (8 pins)	
PE0/ $\overline{\text{EC0}}$	Input/Input	(Port E) 6-bit port. Lower 4 bits are for inputs; upper 2 bits are for outputs. Incorporation of pull-up resistor can be set through the software. (8 pins)	External event inputs for timer/counter. (2 pins)
PE1/ $\overline{\text{EC1}}$	Input/Input		
PE2/RMC	Input/Input		Remote control reception circuit input.
PE3/ $\overline{\text{NMI}}$	Input/Input		Non-maskable interruption request input.
PE4/ $\overline{\text{PWM}}$	Output/Output		14-bit PWM output.
PE5/TO/ADJ	Output/Output/ Output		Rectangular wave output for 16-bit timer/counter . Output for 32kHz oscillation frequency demultiplication.
PF0 to PF7	I/O	(Port F) 8-bit I/O port. I/O can be set in a unit of single bits. Incorporation of pull-up resistor can be set through the software in a unit of 4 bits. (8 pins)	





Symbol	I/O	Description	
PG0 to PG7	I/O	(Port G) 8-bit I/O port. I/O can be set in a unit of single bits. Incorporation of pull-up resistor can be set through the software in a unit of 4 bits. (8 pins)	
PH0 to PH7	I/O	(Port H) 8-bit I/O port. I/O can be set in a unit of single bits. Incorporation of pull-up resistor can be set through the software in a unit of 4 bits. (8 pins)	
PI0/INT0 to PI3/INT3	I/O/Input	(Port I) 8-bit I/O ports. I/O can be set in a unit of single bits. Incorporation of pull-up resistor can be set through the software in a unit of 4 bits. (8 pins)	External interruption request inputs.
PI4 to PI7	I/O		
EXTAL	Input	Crystal connectors for system clock oscillation. When the clock is supplied externally, input to EXTAL; opposite phase clock should be input to XTAL.	
XTAL	Output		
TEX	Input	Crystal connectors for 32kHz timer/counter clock oscillation circuit. Connect a 32kHz crystal oscillator between TEX and TX. For usage as event input, connect clock oscillation source to TEX, and open TX.	
TX	Output		
$\overline{\text{RST}}$	Input	Low-level active, system reset.	
NC		NC. Under normal operating conditions, connect to V _{DD} .	
AV _{REF}	Input	Reference voltage input for A/D converter.	
AV _{SS}		A/D converter GND.	
V _{DD}		Positive power supply.	
V _{SS}		GND	

Input/Output Circuit Formats for Pins

Pin	Circuit format	When reset
PA0/AN0 to PA7/AN7 8 pins	Port A Pull-up resistance "0" when reset Port A data Port A direction "0" when reset Data bus RD (Port A) Port A input selection "0" when reset Input multiplexer A/D converter * Pull-up transistors approx. 10kΩ	Hi-Z
PB0/CINT PB1/CS0 PB3/SI0 PB6/SI1 4 pins	Port B Pull-up resistance "0" when reset Port B data Port B direction "0" when reset Data bus RD (Port B) Schmitt input CINT CS0 SI0 SI1 * Pull-up transistors approx. 10kΩ	Hi-Z
PB2/SCK0 PB5/SCK1 2 pins	Port B Pull-up resistance "0" when reset SCK OUT Output enable Port B output selection "0" when reset Port B data Port B direction "0" when reset Data bus RD (Port B) Schmitt input SCK in * Pull-up transistors approx. 10kΩ	Hi-Z

Pin	Circuit format	When reset
PB4/SO0 1 pin	* Pull-up transistors approx. 10kΩ	Hi-Z
PB7/SO1 1 pin	* Pull-up transistors approx. 200kΩ	High level
PC0 to PC7 8 pins	*1 High current drive of 12mA possible *2 Pull-up transistors approx. 10kΩ	Hi-Z
PE0/ $\overline{\text{EC0}}$ PE1/ $\overline{\text{EC1}}$ PE2/RMC PE3/NMI 4 pins	EC0 EC1 RMC/NMI	Hi-Z

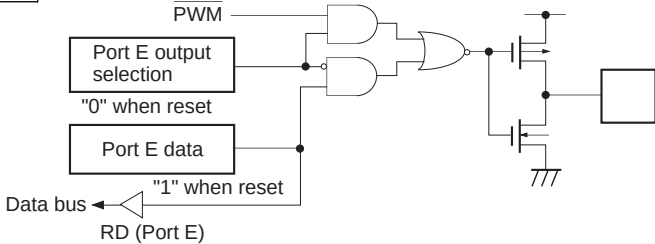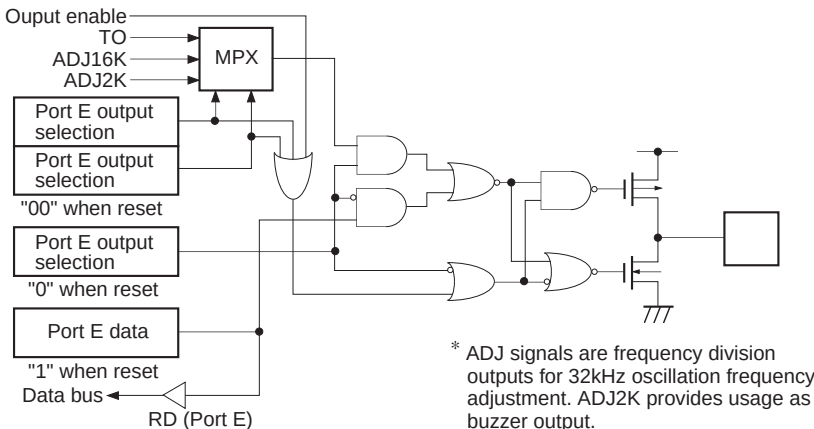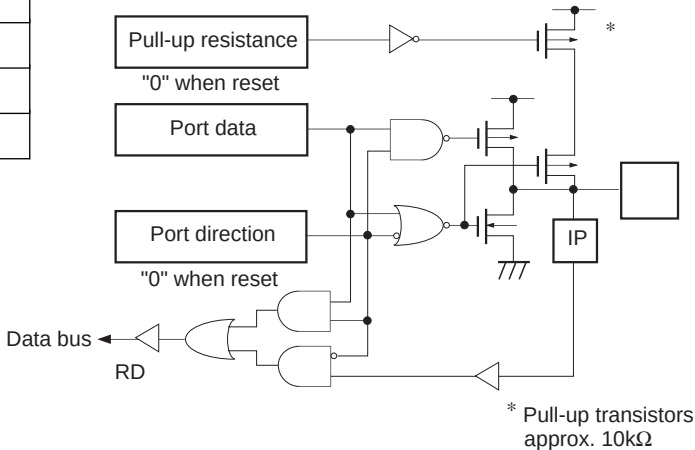Pin	Circuit format		When reset
PE4/PWM 1 pin	Port E 	High level	
PE5/TO/ADJ 1 pin	Port E 	High level	
PD0 to PD7 PF0 to PF7 PG0 to PG7 PH0 to PH7 PI4 to PI7 36 pins	Port D Port F Port G Port H Port I 	Hi-Z	

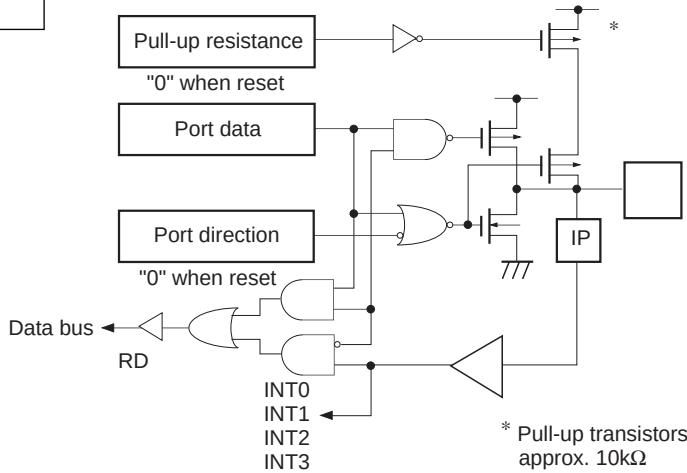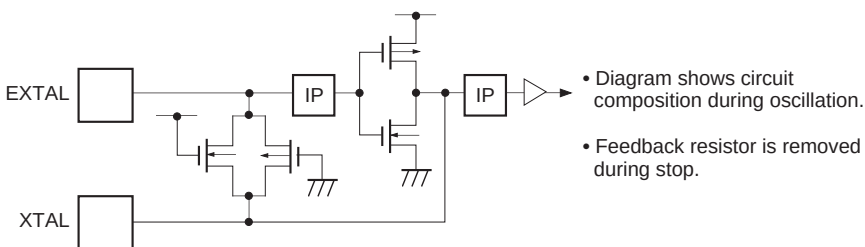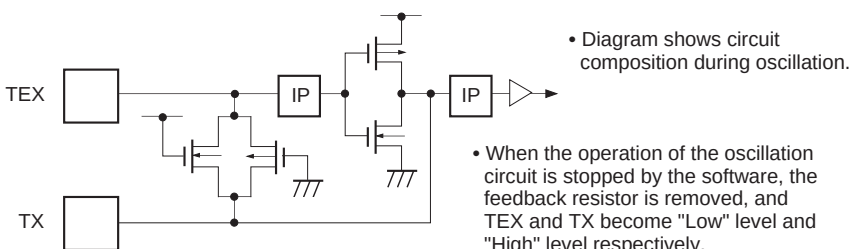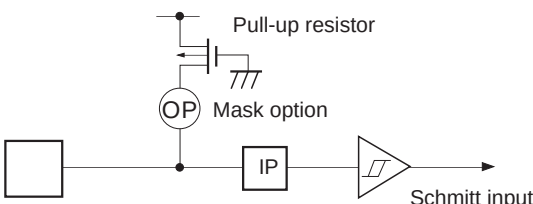Pin	Circuit format	When reset
PI0/INT0 to PI3/INT3 4 pins	Port I  * Pull-up transistors approx. 10kΩ	Hi-Z
EXTAL XTAL 2 pins	 • Diagram shows circuit composition during oscillation. • Feedback resistor is removed during stop.	Oscillation
TEX TX 2 pins	 • Diagram shows circuit composition during oscillation. • When the operation of the oscillation circuit is stopped by the software, the feedback resistor is removed, and TEX and TX become "Low" level and "High" level respectively.	Oscillation
RST 1 pin	 Pull-up resistor Mask option Schmitt input	Low level

Absolute Maximum Ratings

(V_{SS} = 0V reference)

Item	Symbol	Ratings	Unit	Remarks
Supply voltage	V _{DD}	−0.3 to +7.0	V	
	AV _{SS}	−0.3 to +0.3	V	
Input voltage	V _{IN}	−0.3 to +7.0* ¹	V	
Output voltage	V _{OUT}	−0.3 to +7.0* ¹	V	
High level output current	I _{OH}	−5	mA	Output per pin
High level total output current	ΣI _{OH}	−50	mA	Total for all output pins
Low level output current	I _{OL}	15	mA	Value per pin, excluding large current outputs
	I _{OLC}	20	mA	Value per pin* ² for large current outputs
Low level total output current	ΣI _{OL}	100	mA	Total for all output pins
Operating temperature	T _{opr}	−20 to +75	°C	
Storage temperature	T _{stg}	−55 to +150	°C	
Allowable power dissipation	P _D	600	mW	

*¹ V_{IN} and V_{OUT} must not exceed V_{DD} + 0.3V.*² The high current drive transistor is the N-ch transistor of Port C (PC).

Note) Usage exceeding absolute maximum ratings may permanently impair the LSI. Normal operation should be conducted under the recommended operating conditions. Exceeding these conditions may adversely affect the reliability of the LSI.

Recommended Operating Conditions

(V_{SS} = 0V reference)

Item	Symbol	Min.	Max.	Unit	Remarks
Supply voltage	V _{DD}	4.5	5.5	V	High-speed mode guaranteed operation range* ¹
		3.5	5.5		Low-speed mode guaranteed operation range* ¹
		2.7	5.5		Guaranteed operation range with TEX clock
		2.5	5.5		Guaranteed data hold range during stop
High level input voltage	V _{IH}	0.7V _{DD}	V _{DD}	V	* ²
	V _{IHS}	0.8V _{DD}	V _{DD}	V	Hysteresis input* ³
	V _{IHEX}	V _{DD} − 0.4	V _{DD} + 0.3	V	EXTAL* ⁴
Low level input voltage	V _{IL}	0	0.3V _{DD}	V	* ²
	V _{ILS}	0	0.2V _{DD}	V	Hysteresis input* ³
	V _{ILEX}	−0.3	0.4	V	EXTAL* ⁴
Operating temperature	T _{opr}	−20	+75	°C	

*¹ High-speed mode is 1/2 frequency demultiplication clock selection; low-speed mode is 1/16 frequency demultiplication clock selection.*² Value for each pin of normal input ports (PA, PB3, PB4, PB6, PC, PD, PF to PH, PI4 to PI7).*³ Value of the following pins: $\overline{\text{RST}}$, CINT, $\overline{\text{CS0}}$, $\overline{\text{SCK0}}$, $\overline{\text{SCK1}}$, $\overline{\text{EC0}}$, $\overline{\text{EC1}}$, RMC, $\overline{\text{NMI}}$, INT0, INT1, INT2, INT3.*⁴ Specifies only during external clock input.

Electrical Characteristics

DC Characteristics

(Ta = -20 to +75°C, Vss = 0V reference)

Item	Symbol	Pins	Conditions	Min.	Typ.	Max.	Unit
High level output voltage	V _{OH}	PA to PD, PE4, PE5, PF to PI	V _{DD} = 4.5V, I _{OH} = −0.5mA	4.0			V
			V _{DD} = 4.5V, I _{OH} = −1.2mA	3.5			V
Low level output voltage	V _{OL}		V _{DD} = 4.5V, I _{OL} = 1.8mA			0.4	V
			V _{DD} = 4.5V, I _{OL} = 3.6mA			0.6	V
		PC	V _{DD} = 4.5V, I _{OL} = 12.0mA			1.5	V
Input current	I _{IHE}	EXTAL	V _{DD} = 5.5V, V _{IH} = 5.5V	0.5		40	μA
	I _{IIE}		V _{DD} = 5.5V, V _{IL} = 0.4V	−0.5		−40	μA
	I _{IHT}	TEX	V _{DD} = 5.5V, V _{IH} = 5.5V	0.1		10	μA
	I _{ILT}			−0.1		−10	μA
	I _{ILR}	$\overline{\text{RST}}^{*1}$	V _{DD} = 5.5V, V _{IL} = 0.4V	−1.5		−400	μA
	I _{IL}	PA to PD ^{*2} , PF to PI ^{*2}				−2.0	mA
			V _{DD} = 4.5V, V _{IL} = 4.0V	−10			μA
I/O leakage current	I _{IZ}	$\overline{\text{PE0}}$ to PE3, $\overline{\text{RST}}^{*1}$	V _{DD} = 5.5V, V _I = 0, 5.5V			±10	μA
Power supply current ^{*3}	I _{DD1}	V _{DD}	High-speed mode operation (1/2 frequency demultiplier clock)		20	42	mA
			V _{DD} = 5.5V, 10MHz crystal oscillation (C ₁ = C ₂ = 15pF)				
	I _{DD2}		V _{DD} = 3V, 32kHz crystal oscillation (C ₁ = C ₂ = 47pF)		35	100	μA
	I _{DDS1}		Sleep mode		1.1	8	mA
			V _{DD} = 5.5V, 10MHz crystal oscillation (C ₁ = C ₂ = 15pF)				
	I _{DDS2}		V _{DD} = 3V, 32kHz crystal oscillation (C ₁ = C ₂ = 47pF)		9	30	μA
	I _{DDS3}		Stop mode				
V _{DD} = 5.5V, termination of 10MHz and 32kHz crystal oscillation				10	μA		
Input capacity	C _{IN}	Pins other than PB7, PE4, PE5, AVREF, V _{DD} , V _{SS}	Clock 1MHz 0V for all pins excluding measured pins		10	20	pF

*1 $\overline{\text{RST}}$ specifies the input current when pull-up resistance has been selected; leakage current when no resistance has been selected.

*2 Pins PA to PD, and PF to PI specify the input current when pull-up resistance has been selected; leakage current when no resistance has been selected. (Excludes output PB7)

*3 When all pins are open.

AC Characteristics

(1) Clock timing

(Ta = -20 to +75°C, V_{DD} = 4.5 to 5.5V, V_{SS} = 0V reference)

Item	Symbol	Pin	Conditions	Min.	Typ.	Max.	Unit
System clock frequency	f _c	XTAL EXTAL	Fig. 1, Fig. 2	1		10	MHz
System clock input pulse width	t _{XL} , t _{XH}	EXTAL	Fig. 1, Fig. 2 External clock drive	37.5			ns
System clock input rise time, fall time	t _{CR} , t _{CF}	EXTAL	Fig. 1, Fig. 2 External clock drive			200	ns
Event count input clock pulse width	t _{EH} , t _{EL}	$\overline{\text{EC0}}$ EC1	Fig. 3	t _{sys} + 50* ¹			ns
Event count input clock rise time, fall time	t _{ER} , t _{EF}	$\overline{\text{EC0}}$ EC1	Fig. 3			20	ms
System clock frequency	f _c	TEX TX	V _{DD} = 2.7 to 5.5V Fig. 2 (32kHz clock applied condition)		32.768		kHz
Event count input clock input pulse width	t _{TL} , t _{TH}	TEX	Fig. 3	10			μs
Event count input clock rise time, fall time	t _{TR} , t _{TF}	TEX	Fig. 3			20	ms

*¹ t_{sys} indicates the three values below according to the upper two bits (CPU clock selection) of the clock control register (address: 00FEH).

t_{sys} [ns] = 2000/f_c (upper two bits = "00"), 4000/f_c (upper two bits = "01"), 16000/f_c (upper two bits = "11")

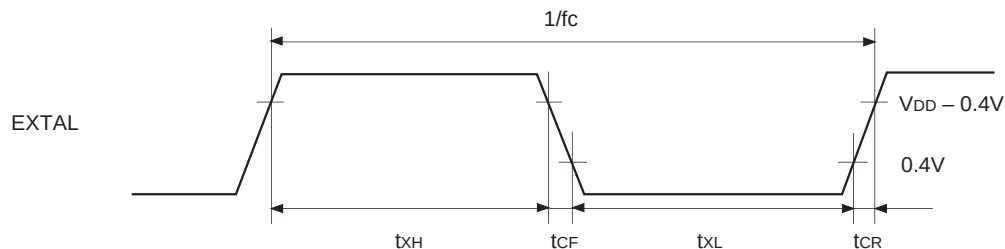


Fig. 1. Clock timing

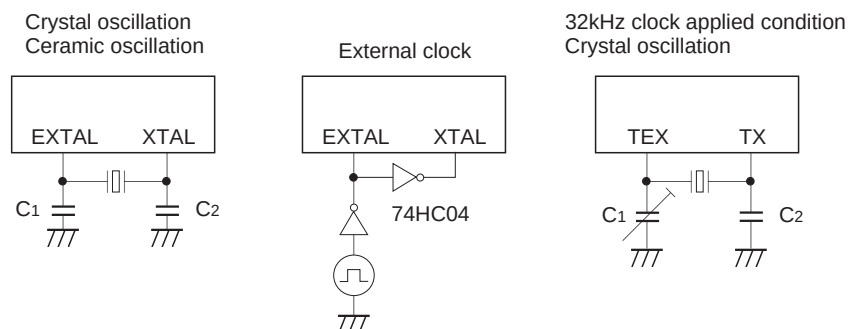


Fig. 2. Clock applied condition

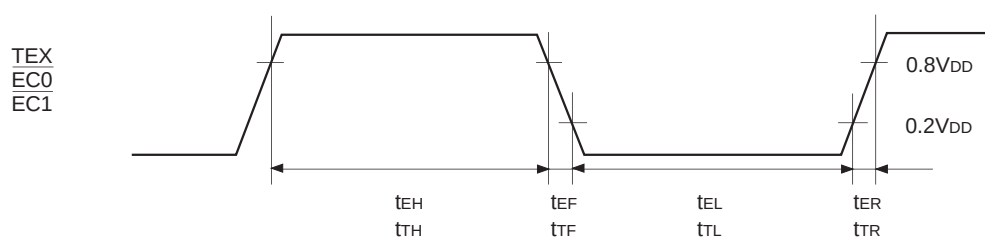


Fig. 3. Event count clock timing

(2) Serial transfer (CH0)

(Ta = -20 to +75°C, VDD = 4.5 to 5.5V, VSS = 0V reference)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
$\overline{\text{CS0}} \downarrow \rightarrow \overline{\text{SCK0}}$ delay time	t_{DCSK}	$\overline{\text{SCK0}}$	Chip select transfer mode ($\overline{\text{SCK0}}$ = output mode)		$t_{\text{sys}} + 200$	ns
$\overline{\text{CS0}} \uparrow \rightarrow \overline{\text{SCK0}}$ float delay time	t_{DCSKF}	$\overline{\text{SCK0}}$	Chip select transfer mode ($\overline{\text{SCK0}}$ = output mode)		$t_{\text{sys}} + 200$	ns
$\overline{\text{CS0}} \downarrow \rightarrow \text{SO0}$ delay time	t_{DCSO}	SO0	Chip select transfer mode		$t_{\text{sys}} + 200$	ns
$\overline{\text{CS0}} \uparrow \rightarrow \text{SO0}$ float delay time	t_{DCSOF}	SO0	Chip select transfer mode		$t_{\text{sys}} + 200$	ns
$\overline{\text{CS0}}$ High level width	t_{WHCS}	$\overline{\text{CS0}}$	Chip select transfer mode	$t_{\text{sys}} + 200$		ns
$\overline{\text{SCK0}}$ cycle time	t_{KCY}	$\overline{\text{SCK0}}$	Input mode	$2t_{\text{sys}} + 200$		ns
			Output mode	$16000/f_c$		ns
$\overline{\text{SCK0}}$ High and Low level widths	t_{KH} t_{KL}	$\overline{\text{SCK0}}$	Input mode	$t_{\text{sys}} + 100$		ns
			Output mode	$8000/f_c - 50$		ns
SI0 input setup time (for $\overline{\text{SCK0}} \uparrow$)	t_{SIK}	SI0	$\overline{\text{SCK0}}$ input mode	100		ns
			$\overline{\text{SCK0}}$ output mode	200		ns
SI0 input hold time (for $\overline{\text{SCK0}} \uparrow$)	t_{KSI}	SI0	$\overline{\text{SCK0}}$ input mode	$t_{\text{sys}} + 200$		ns
			$\overline{\text{SCK0}}$ output mode	100		ns
$\overline{\text{SCK0}} \downarrow \rightarrow \text{SO0}$ delay time	t_{KSO}	SO0	$\overline{\text{SCK0}}$ input mode		$t_{\text{sys}} + 200$	ns
			$\overline{\text{SCK0}}$ output mode		100	ns

Note 1) t_{sys} indicates the three values below according to the upper two bits (CPU clock selection) of the clock control register (address: 00FEH).

t_{sys} [ns] = 2000/ f_c (upper two bits = "00"), 4000/ f_c (upper two bits = "01"), 16000/ f_c (upper two bits = "11")

Note 2) The load condition for the $\overline{\text{SCK0}}$ output mode, SO0 output delay time is 50pF + 1TTL.

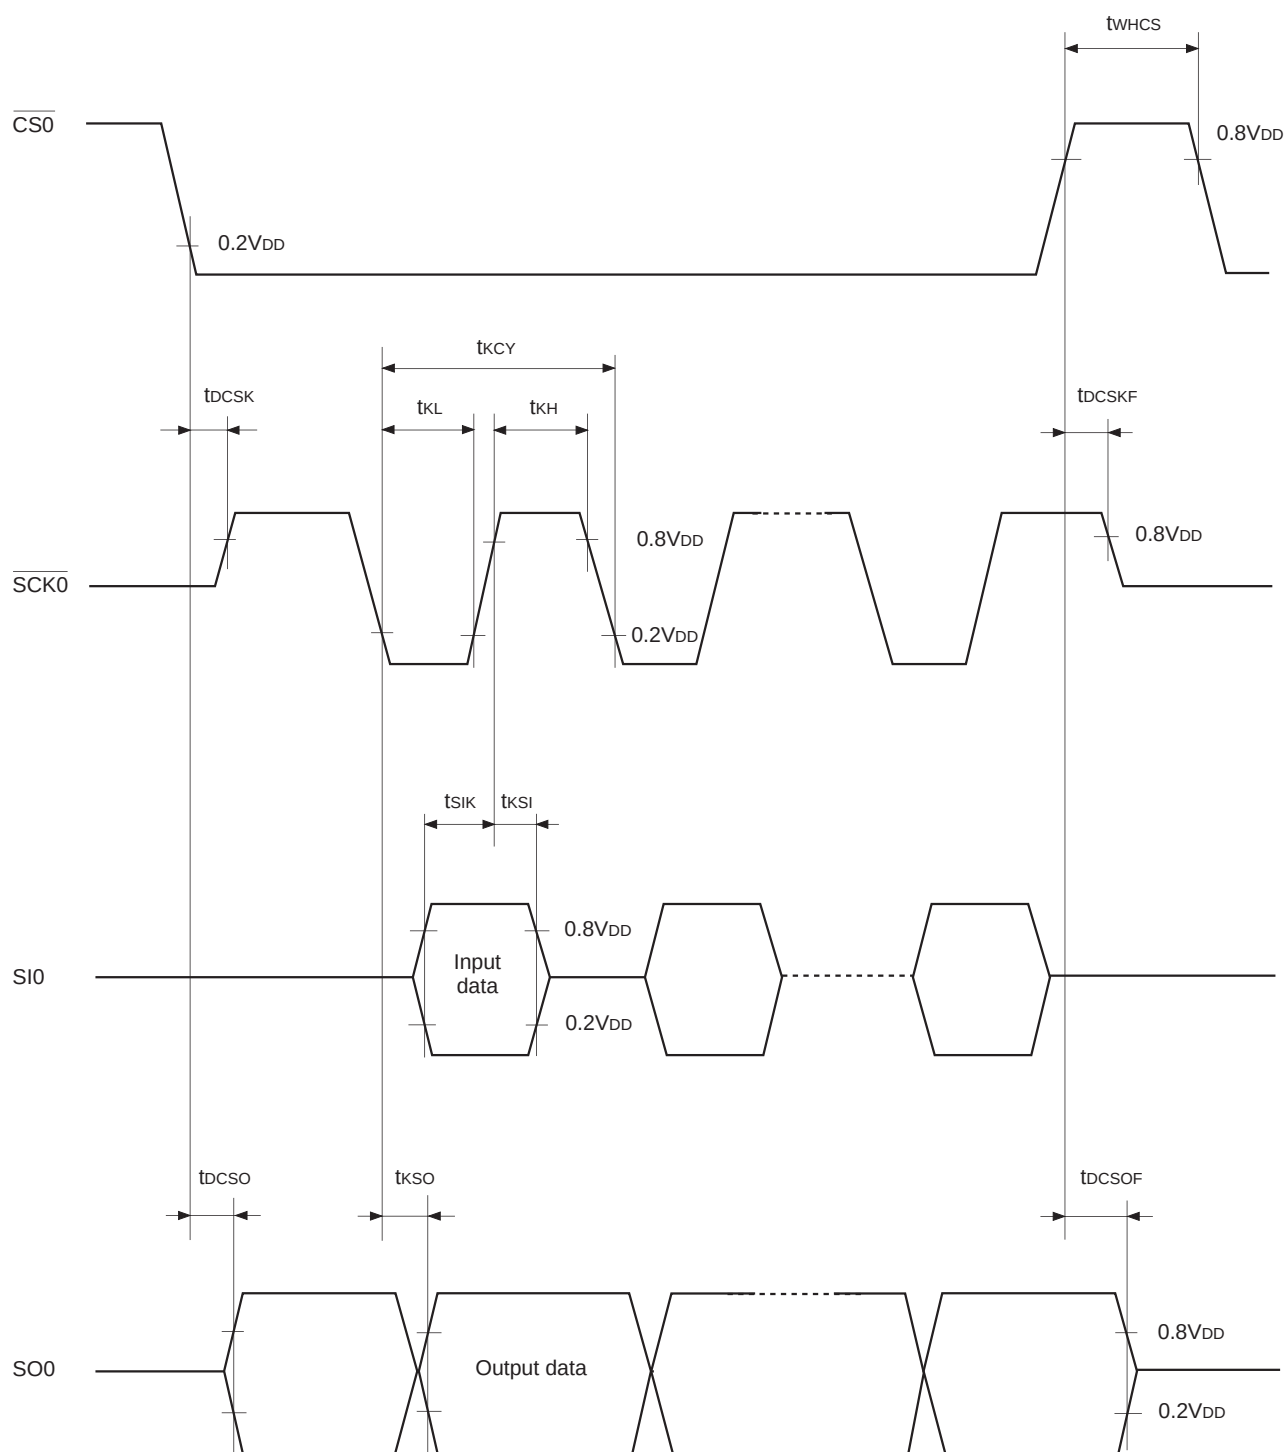


Fig. 4. Serial transfer CH0 timing

Serial transfer (CH1)

(Ta = -20 to +75°C, V_{DD} = 4.5 to 5.5V, V_{SS} = 0V reference)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
$\overline{\text{SCK1}}$ cycle time	t_{KCY}	$\overline{\text{SCK1}}$	Input mode	1000		ns
			Output mode	16000/fc		ns
$\overline{\text{SCK1}}$ High and Low level widths	t_{KH} t_{KL}	$\overline{\text{SCK1}}$	Input mode	400		ns
			Output mode	8000/fc - 50		ns
SI1 input setup time (for $\overline{\text{SCK1}} \uparrow$)	t_{SIK}	SI1	$\overline{\text{SCK1}}$ input mode	100		ns
			$\overline{\text{SCK1}}$ output mode	200		ns
SI1 input hold time (for $\overline{\text{SCK1}} \uparrow$)	t_{KSI}	SI1	$\overline{\text{SCK1}}$ input mode	200		ns
			$\overline{\text{SCK1}}$ output mode	100		ns
$\overline{\text{SCK1}} \downarrow \rightarrow \text{SO1}$ delay time	t_{KSO}	SO1	$\overline{\text{SCK1}}$ input mode		200	ns
			$\overline{\text{SCK1}}$ output mode		100	ns


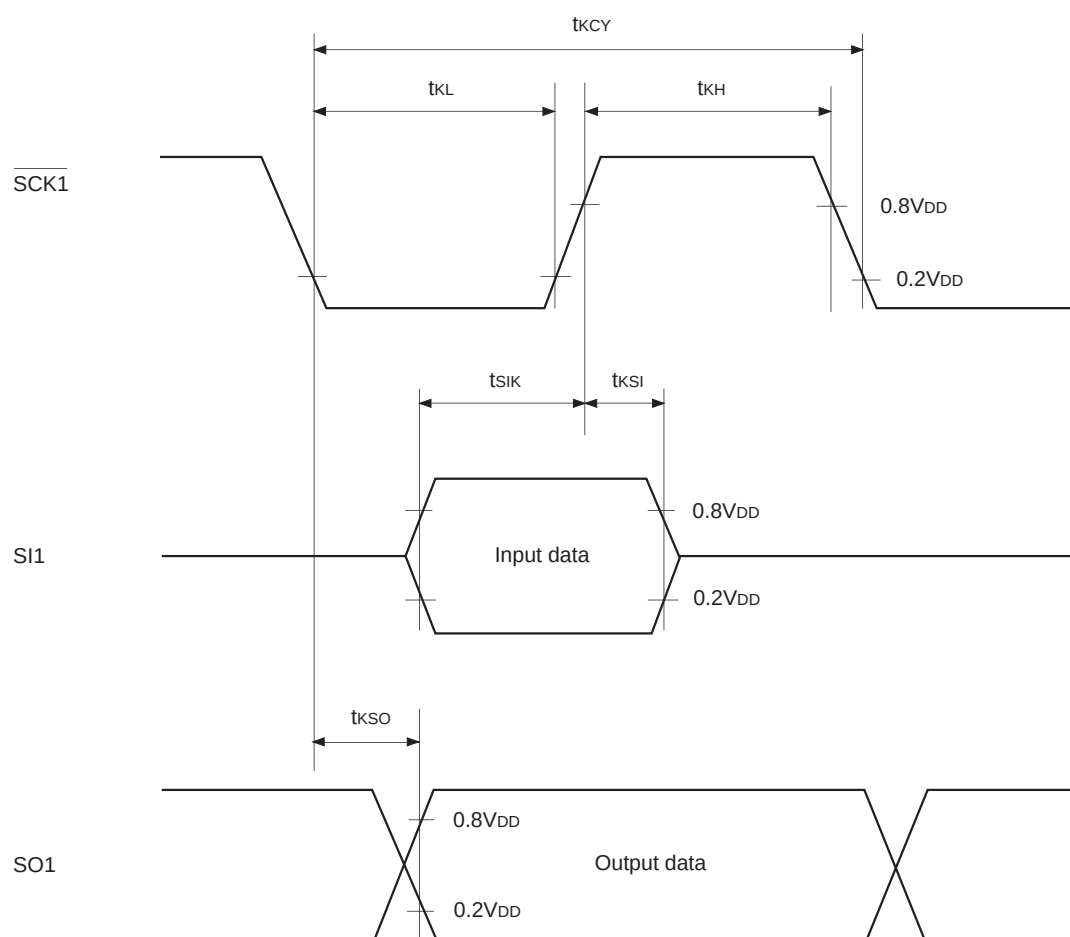
Note) The load condition for the $\overline{\text{SCK1}}$ output mode, SO1 output delay time is 50pF + 1TTL.

Fig. 5. Serial transfer CH1 timing

(3) A/D converter characteristics(Ta = -20 to +75°C, V_{DD} = 4.5 to 5.5V, AV_{REF} = 4.0 to AV_{DD}, V_{SS} = AV_{SS} = 0V reference)

Item	Symbol	Pin	Condition	Min.	Typ.	Max.	Unit
Resolution						8	Bits
Linearity error			Ta = 25°C V _{DD} = 5.0V V _{SS} = AV _{SS} = 0V			±5	LSB
Zero transition voltage	V _{ZT} *1			-10	70	150	mV
Full-scale transition voltage	V _{FT} *2			4930	5050	5120	mV
Conversion time	t _{CONV}			160/f _{ADC} *3			μs
Sampling time	t _{SAMP}			12/f _{ADC} *3			μs
Reference input voltage	V _{REF}	AV _{REF}		V _{DD} - 0.5		V _{DD}	V
Analog input voltage	V _{IAN}	AN0 to AN7		0		AV _{REF}	V
AV _{REF} current	I _{REF}	AV _{REF}	Operation mode		0.6	1.0	mA
	I _{REFS}		Sleep mode Stop mode 32kHz operation mode			10	μA

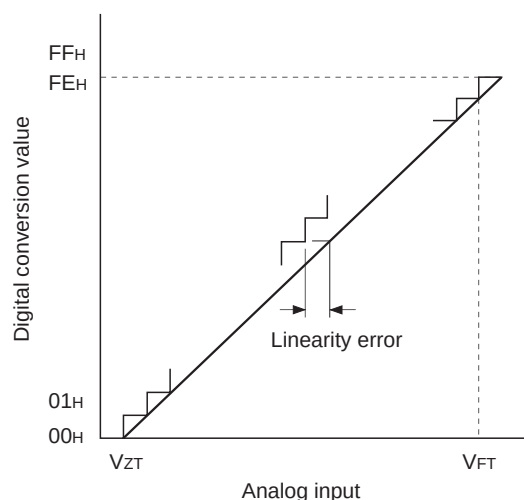

*1 V_{ZT} : Value at which the digital conversion value changes from 00_H to 01_H and vice versa.

*2 V_{FT} : Value at which the digital conversion value changes from FE_H to FF_H and vice versa.

*3 f_{ADC} indicates the below values due to ADC operation clock selection.



During PS2 selection, f_{ADC} = f_c/2

During PS1 selection, f_{ADC} = f_c

Fig. 6. Definition of A/D converter terms

(4) Interruption, reset input ($T_a = -20$ to $+75^\circ\text{C}$, $V_{DD} = 4.5$ to 5.5V , $V_{SS} = 0\text{V}$ reference)

Item	Symbol	Pin	Condition	Min.	Max.	Unit
External interruption High and Low level widths	t_{IH} t_{IL}	INT0 INT1 INT2 INT3 $\overline{\text{NMI}}$ PJ0 to PJ7		1		μs
Reset input Low level width	t_{RSL}	$\overline{\text{RST}}$		$8/f_c$		μs

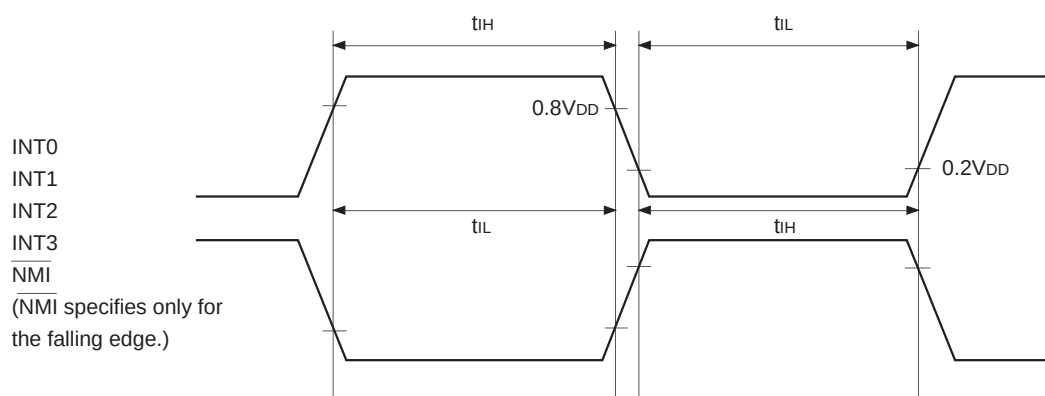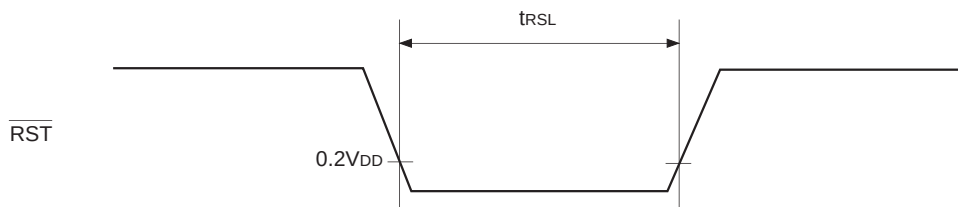**Fig 7. Interruption input timing****Fig. 8. $\overline{\text{RST}}$ input timing**

Appendix

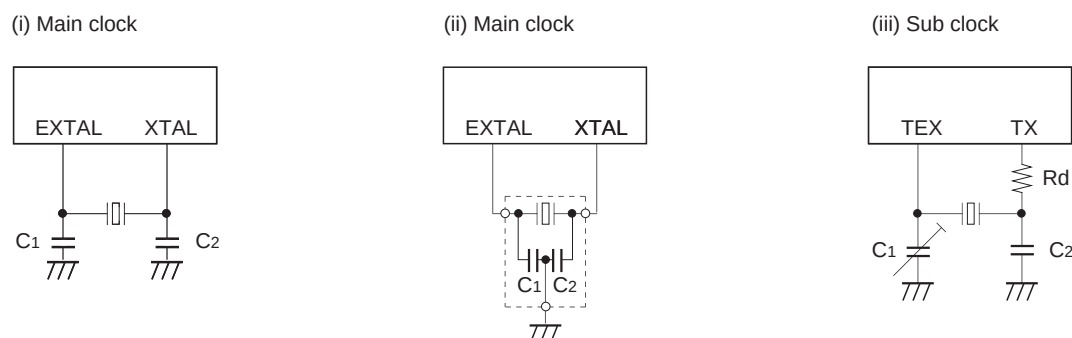


Fig. 9. Recommended oscillation circuit

Manufacturer	Model	fc (MHz)	C ₁ (pF)	C ₂ (pF)	Rd (Ω)	Circuit example	
MURATA MFG CO., LTD.	CSA4.19MG	4.19	30	30	0	(i)	
	CSA8.00MTZ	8.00					
	CSA10.0MTZ	10.00					
	CST4.19MGW*	4.19				(ii)	
	CST8.00MTW*	8.00					
	CST10.0MTW*	10.00					
RIVER ELETEC CORPORATION	HC-49/U03	4.19	12	12	0	(i)	
		8.00					
		10.00					
KINSEKI LTD.	HC-49/U (-S)	4.19	27	27	0		(i)
		8.00					
		10.00	20	20			
	P3	32.768kHz	50	22	1M	(iii)	

Those marked with an asterisk (*) signify types with built-in ground capacitance (C₁, C₂).

Mask option table

Item	Content	
Reset pin pull-up resistance	Non-existent	Existent

Unit: mm

Technical drawing of a microchip showing top and side views with dimensions and tolerances.

Top View Dimensions:


- Overall width: 23.9 ± 0.4
- Overall height: 17.9 ± 0.4
- Pin 1 indicator: 1
- Pin 64: 64
- Pin 41: 41
- Pin 40: 40
- Pin 25: 25
- Pin 24: 24
- Pin 80: 80
- Pin 65: 65
- Pin 1: 1
- Pin 2: 2
- Pin 3: 3
- Pin 4: 4
- Pin 5: 5
- Pin 6: 6
- Pin 7: 7
- Pin 8: 8
- Pin 9: 9
- Pin 10: 10
- Pin 11: 11
- Pin 12: 12
- Pin 13: 13
- Pin 14: 14
- Pin 15: 15
- Pin 16: 16
- Pin 17: 17
- Pin 18: 18
- Pin 19: 19
- Pin 20: 20
- Pin 21: 21
- Pin 22: 22
- Pin 23: 23
- Pin 24: 24
- Pin 25: 25
- Pin 26: 26
- Pin 27: 27
- Pin 28: 28
- Pin 29: 29
- Pin 30: 30
- Pin 31: 31
- Pin 32: 32
- Pin 33: 33
- Pin 34: 34
- Pin 35: 35
- Pin 36: 36
- Pin 37: 37
- Pin 38: 38
- Pin 39: 39
- Pin 40: 40
- Pin 41: 41
- Pin 42: 42
- Pin 43: 43
- Pin 44: 44
- Pin 45: 45
- Pin 46: 46
- Pin 47: 47
- Pin 48: 48
- Pin 49: 49
- Pin 50: 50
- Pin 51: 51
- Pin 52: 52
- Pin 53: 53
- Pin 54: 54
- Pin 55: 55
- Pin 56: 56
- Pin 57: 57
- Pin 58: 58
- Pin 59: 59
- Pin 60: 60
- Pin 61: 61
- Pin 62: 62
- Pin 63: 63
- Pin 64: 64

Side View Dimensions:

- Overall height: 16.3
- Pin 1: 1
- Pin 2: 2
- Pin 3: 3
- Pin 4: 4
- Pin 5: 5
- Pin 6: 6
- Pin 7: 7
- Pin 8: 8
- Pin 9: 9
- Pin 10: 10
- Pin 11: 11
- Pin 12: 12
- Pin 13: 13
- Pin 14: 14
- Pin 15: 15
- Pin 16: 16
- Pin 17: 17
- Pin 18: 18
- Pin 19: 19
- Pin 20: 20
- Pin 21: 21
- Pin 22: 22
- Pin 23: 23
- Pin 24: 24
- Pin 25: 25
- Pin 26: 26
- Pin 27: 27
- Pin 28: 28
- Pin 29: 29
- Pin 30: 30
- Pin 31: 31
- Pin 32: 32
- Pin 33: 33
- Pin 34: 34
- Pin 35: 35
- Pin 36: 36
- Pin 37: 37
- Pin 38: 38
- Pin 39: 39
- Pin 40: 40
- Pin 41: 41
- Pin 42: 42
- Pin 43: 43
- Pin 44: 44
- Pin 45: 45
- Pin 46: 46
- Pin 47: 47
- Pin 48: 48
- Pin 49: 49
- Pin 50: 50
- Pin 51: 51
- Pin 52: 52
- Pin 53: 53
- Pin 54: 54
- Pin 55: 55
- Pin 56: 56
- Pin 57: 57
- Pin 58: 58
- Pin 59: 59
- Pin 60: 60
- Pin 61: 61
- Pin 62: 62
- Pin 63: 63
- Pin 64: 64

Feature Callouts:

- Feature 1: 0.8
- Feature 2: 0.2
- Feature 3: 0.15
- Feature 4: 0.15
- Feature 5: 0.15
- Feature 6: 0.15
- Feature 7: 0.15
- Feature 8: 0.15
- Feature 9: 0.15
- Feature 10: 0.15
- Feature 11: 0.15
- Feature 12: 0.15
- Feature 13: 0.15
- Feature 14: 0.15
- Feature 15: 0.15
- Feature 16: 0.15
- Feature 17: 0.15
- Feature 18: 0.15
- Feature 19: 0.15
- Feature 20: 0.15
- Feature 21: 0.15
- Feature 22: 0.15
- Feature 23: 0.15
- Feature 24: 0.15
- Feature 25: 0.15
- Feature 26: 0.15
- Feature 27: 0.15
- Feature 28: 0.15
- Feature 29: 0.15
- Feature 30: 0.15
- Feature 31: 0.15
- Feature 32: 0.15
- Feature 33: 0.15
- Feature 34: 0.15
- Feature 35: 0.15
- Feature 36: 0.15
- Feature 37: 0.15
- Feature 38: 0.15
- Feature 39: 0.15
- Feature 40: 0.15
- Feature 41: 0.15
- Feature 42: 0.15
- Feature 43: 0.15
- Feature 44: 0.15
- Feature 45: 0.15
- Feature 46: 0.15
- Feature 47: 0.15
- Feature 48: 0.15
- Feature 49: 0.15
- Feature 50: 0.15
- Feature 51: 0.15
- Feature 52: 0.15
- Feature 53: 0.15
- Feature 54: 0.15
- Feature 55: 0.15
- Feature 56: 0.15
- Feature 57: 0.15
- Feature 58: 0.15
- Feature 59: 0.15
- Feature 60: 0.15
- Feature 61: 0.15
- Feature 62: 0.15
- Feature 63: 0.15
- Feature 64: 0.15



DETAIL A

PACKAGE STRUCTURE

SONY CODE	QFP-80P-L01
EIAJ CODE	QFP080-P-1420
JEDEC CODE	_____

PACKAGE MATERIAL	EPOXY RESIN
LEAD TREATMENT	SOLDER PLATING
LEAD MATERIAL	42/COPPER ALLOY
PACKAGE MASS	1.6g



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.