



500 mW AXIAL-LEADED ZENER DIODES

Screening in reference to MIL-PRF-19500 available

DESCRIPTION

The 1N4678-1 thru 1N4717-1 series of 0.5 watt Zener voltage regulators provides a selection from 1.8 to 43 volts in standard 5% tolerances as well as tighter tolerances. These axial-leaded glass DO-35 Zeners are available with an internal metallurgical bond similar to military requirements for similar Zeners. Microsemi also offers numerous other Zener products to meet higher and lower power applications.

Important: For the latest information, visit our website <http://www.microsemi.com>.


FEATURES

- JEDEC registered 1N4678 thru 1N4717 series.
- Internal metallurgical bond.
- Tighter voltage tolerances of 2% and 1% are available.
- Up-screening available in reference to MIL-PRF-19500. (See [part nomenclature](#) for all available options).
- RoHS compliant devices available (commercial grade only).



DO-35 (DO-204AH) Package

Also available in:

 **DO-213AA**
(surface mount)
[1N4678UR-1 – 1N4717UR-1](#)

APPLICATIONS / BENEFITS

- Regulates voltage over a broad operating current and temperature range.
- Guaranteed maximum voltage regulation 10 μ A to 100 μ A.
- Voltage selection from 1.8 to 43 V.
- Flexible axial-lead mounting terminals.
- Non-sensitive to ESD per MIL-STD-750 method 1020.
- Minimal capacitance (see [Figure 3](#)).
- Inherently radiation hard as described in Microsemi's "[MicroNote 050](#)".

MAXIMUM RATINGS

| Parameters/Test Conditions | Symbol | Value | Unit |
|---|---------------------|-------------|----------------|
| Junction and Storage Temperature | T_J and T_{STG} | -65 to +175 | $^{\circ}$ C |
| Thermal Resistance Junction-to-Lead ⁽¹⁾ | $R_{\theta JL}$ | 250 | $^{\circ}$ C/W |
| Thermal Resistance Junction-to-Ambient ⁽²⁾ | $R_{\theta JA}$ | 310 | $^{\circ}$ C/W |
| Steady-State Power Dissipation ⁽³⁾ | P_D | 0.5 | W |
| Forward Voltage @ 200 mA | V_F | 1.1 | V |
| Solder Temperature @ 10 s | T_{SP} | 260 | $^{\circ}$ C |

- Notes:**
1. At 3/8 (10 mm) lead length from body.
 2. When mounted on FR4 PC board (1 oz Cu) with 4 mm² copper pads and track width 1 mm, length 25 mm.
 3. At $T_L \leq 50^{\circ}$ C 3/8 inch (10 mm) from body or 0.48 W at $T_A \leq 25^{\circ}$ C when mounted on FR4 PC board as described for thermal resistance (see [Figure 2](#) for derating).

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
Tel: 1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland

Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:
www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Hermetically sealed axial-lead glass DO-35 (DO-204AH) package.
- TERMINALS: Leads tin-lead plated or RoHS compliant matte-tin plating available (on commercial grade only) solderable per MIL-STD-750, method 2026.
- POLARITY: Cathode indicated by band where diode is to be operated with the banded end positive with respect to the opposite end for Zener regulation.
- MARKING: Part number.
- TAPE & REEL option: Standard per EIA-296 (add "TR" suffix to part number). Consult factory for quantities.
- WEIGHT: 0.2 grams.
- See [Package Dimensions](#) on last page.

PART NOMENCLATURE

SYMBOLS & DEFINITIONS

| Symbol | Definition |
|----------------------|--|
| I_{ZT} or I_{ZK} | Regulator Current: The dc regulator current (I_Z), at a specified test point (I_{ZT}), near breakdown knee (I_{ZK}). |
| I_R | Reverse Current: The maximum reverse (leakage) current that will flow at the specified voltage and temperature. |
| I_{ZM} | Maximum Regulator (Zener) Current: The maximum rated dc current for the specified power rating. |
| T_{SP} | Temperature Solder Pad: The maximum solder temperature that can be safely applied to the terminal. |
| V_R | Reverse Voltage: The reverse voltage dc value, no alternating component. |
| V_Z | Zener Voltage: The Zener voltage the device will exhibit at a specified current (I_Z) in its breakdown region. |

ELECTRICAL CHARACTERISTICS @ 25 °C unless otherwise noted.

| JEDEC TYPE NUMBER (Note 1) | NOMINAL ZENER VOLTAGE (Note 3) | ZENER TEST CURRENT | MAXIMUM VOLTAGE REGULATION (Note 2 & 3) | MAXIMUM REVERSE LEAKAGE CURRENT | | MAXIMUM dc ZENER CURRENT* |
|--------------------------------------|---|-----------------------|--|------------------------------------|-------|---------------------------------|
| | V_Z | I_{ZT} | ΔV_Z | I_R @ V_R | | I_{ZM} |
| | Volts | μA | Volts | μA | Volts | mA |
| 1N4678-1 | 1.8 | 50 | 0.70 | 7.5 | 1.0 | 240 |
| 1N4679-1 | 2.0 | 50 | 0.70 | 5.0 | 1.0 | 220 |
| 1N4680-1 | 2.2 | 50 | 0.75 | 4.0 | 1.0 | 200 |
| 1N4681-1 | 2.4 | 50 | 0.80 | 2.0 | 1.0 | 190 |
| 1N4682-1 | 2.7 | 50 | 0.85 | 1.0 | 1.0 | 180 |
| 1N4683-1 | 3.0 | 50 | 0.90 | 0.8 | 1.0 | 170 |
| 1N4684-1 | 3.3 | 50 | 0.95 | 7.5 | 1.5 | 160 |
| 1N4685-1 | 3.6 | 50 | 0.95 | 7.5 | 2.0 | 150 |
| 1N4686-1 | 3.9 | 50 | 0.97 | 5.0 | 2.0 | 140 |
| 1N4687-1 | 4.3 | 50 | 0.99 | 4.0 | 2.0 | 130 |
| 1N4688-1 | 4.7 | 50 | 0.99 | 10.0 | 3.0 | 120 |
| 1N4689-1 | 5.1 | 50 | 0.97 | 10.0 | 3.0 | 110 |
| 1N4690-1 | 5.6 | 50 | 0.96 | 10.0 | 4.0 | 100 |
| 1N4691-1 | 6.2 | 50 | 0.95 | 10.0 | 5.0 | 90 |
| 1N4692-1 | 6.8 | 50 | 0.90 | 10.0 | 5.1 | 70 |
| 1N4693-1 | 7.5 | 50 | 0.75 | 10.0 | 5.7 | 63.6 |
| 1N4694-1 | 8.2 | 50 | 0.50 | 1.0 | 6.2 | 58.0 |
| 1N4695-1 | 8.7 | 50 | 0.10 | 1.0 | 6.6 | 54.8 |
| 1N4696-1 | 9.1 | 50 | 0.08 | 1.0 | 6.9 | 52.4 |
| 1N4697-1 | 10.0 | 50 | 0.10 | 1.0 | 7.6 | 49.6 |
| 1N4698-1 | 11.0 | 50 | 0.11 | 0.05 | 8.4 | 43.2 |
| 1N4699-1 | 12.0 | 50 | 0.12 | 0.05 | 9.1 | 40.8 |
| 1N4700-1 | 13.0 | 50 | 0.13 | 0.05 | 9.8 | 38.0 |
| 1N4701-1 | 14.0 | 50 | 0.14 | 0.05 | 10.6 | 35.0 |
| 1N4702-1 | 15.0 | 50 | 0.15 | 0.05 | 11.4 | 32.6 |
| 1N4703-1 | 16.0 | 50 | 0.16 | 0.05 | 12.1 | 30.8 |
| 1N4704-1 | 17.0 | 50 | 0.17 | 0.05 | 12.9 | 29.0 |
| 1N4705-1 | 18.0 | 50 | 0.18 | 0.05 | 13.6 | 26.4 |
| 1N4706-1 | 19.0 | 50 | 0.19 | 0.05 | 14.4 | 25.0 |
| 1N4707-1 | 20.0 | 50 | 0.20 | 0.01 | 15.2 | 23.8 |
| 1N4708-1 | 22.0 | 50 | 0.22 | 0.01 | 16.7 | 21.6 |
| 1N4709-1 | 24.0 | 50 | 0.24 | 0.01 | 18.2 | 19.8 |
| 1N4710-1 | 25.0 | 50 | 0.25 | 0.01 | 19.0 | 19.0 |
| 1N4711-1 | 27.0 | 50 | 0.27 | 0.01 | 20.4 | 17.6 |
| 1N4712-1 | 28.0 | 50 | 0.28 | 0.01 | 21.2 | 17.0 |
| 1N4713-1 | 30.0 | 50 | 0.30 | 0.01 | 22.8 | 15.8 |
| 1N4714-1 | 33.0 | 50 | 0.33 | 0.01 | 25.0 | 14.4 |
| 1N4715-1 | 36.0 | 50 | 0.36 | 0.01 | 27.3 | 13.2 |
| 1N4716-1 | 39.0 | 50 | 0.39 | 0.01 | 29.6 | 12.2 |
| 1N4717-1 | 43.0 | 50 | 0.43 | 0.01 | 32.6 | 11.0 |

*JEDEC registered data except I_{ZM} has been increased (doubled) for 500 mW power dissipation capabilities.

- NOTES:**
1. All types as shown are +/-5% tolerance. Also available in 2% and 1% tolerance.
 2. ΔV_Z @ 100 μA minus V_Z @ 10 μA .
 3. The electrical characteristics are measured after allowing the device to stabilize for 20 seconds when mounted with 3/8" minimum lead length from the body.

GRAPHS


FIGURE 1
POWER DERATING CURVE

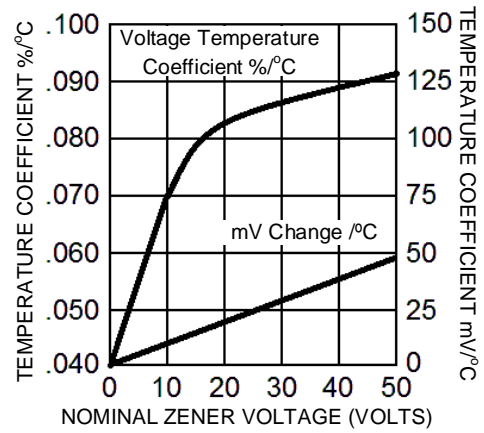


FIGURE 2
ZENER VOLTAGE TEMPERATURE COEFFICIENT vs. ZENER VOLTAGE

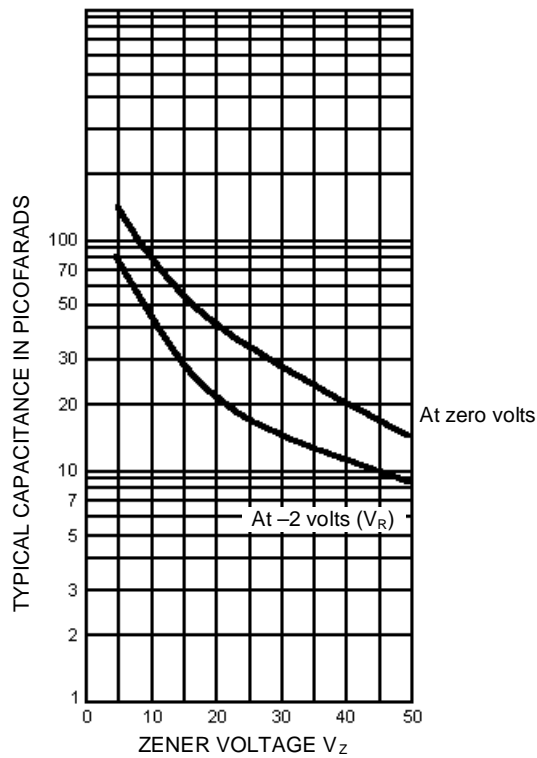


FIGURE 3
CAPACITANCE vs. V_Z CURVE

PACKAGE DIMENSIONS


| Ltr | Dimensions | | | | Notes |
|-----------------------|------------|-------|-------------|-------|-------|
| | Inch | | Millimeters | | |
| | Min | Max | Min | Max | |
| BD | .055 | .090 | 1.40 | 2.29 | 3 |
| BL | .120 | .200 | 3.05 | 5.08 | 3 |
| LD | .018 | .022 | 0.46 | 0.56 | |
| LL | 1.000 | 1.500 | 25.40 | 38.10 | |
| LL₁ | | .050 | | 1.27 | 4 |

NOTES:

1. Dimensions are in inch.
2. Millimeters are given for general information only.
3. Package contour optional within BD and length BL. Heat slugs, if any, shall be included within this cylinder but shall not be subject to minimum limit of BD. The BL dimension shall include the entire body including slugs.
4. Within this zone lead, diameter may vary to allow for lead finishes and irregularities other than heat slugs.
5. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Microchip:

[CDLL4682/TR](#) [CDLL4684e3/TR](#) [CDLL4701/TR](#) [1N4710/TR](#) [1N4688-1/TR](#) [CDLL4704/TR](#) [CDLL4706/TR](#)
[CDLL4678/TR](#) [CDLL4699/TR](#) [1N4708/TR](#) [1N4690e3](#) [1N4715/TR](#) [1N4702/TR](#) [CDLL4707/TR](#) [CDLL4685/TR](#)
[CDLL4710/TR](#) [CDLL4695/TR](#) [1N4713/TR](#) [CDLL4691/TR](#) [CDLL4693/TR](#) [CDLL4711e3](#) [CDLL4698/TR](#)
[CDLL4696e3/TR](#) [CDLL4689/TR](#) [CDLL4714/TR](#) [CDLL4711e3/TR](#) [1N4693-1e3](#) [1N4679/TR](#) [1N4706/TR](#)
[CDLL4684/TR](#) [1N4681/TR](#) [CDLL4712/TR](#) [CDLL4700/TR](#) [CDLL4684e3](#) [CDLL4696/TR](#) [1N4694/TR](#) [1N4701/TR](#)
[CDLL4703/TR](#) [CDLL4709/TR](#) [1N4697/TR](#) [1N4688-1](#) [1N4712/TR](#) [CDLL4679/TR](#) [1N4699-1e3](#) [CDLL4713/TR](#)
[1N4693/TR](#) [CDLL4690E3](#) [CDLL4686/TR](#) [1N4690e3/TR](#) [CDLL4694/TR](#) [CDLL4715/TR](#) [1N4703/TR](#) [1N4716/TR](#)
[1N4699/TR](#) [1N4686/TR](#) [1N4698/TR](#) [1N4717/TR](#) [1N4683/TR](#) [CDLL4681/TR](#) [CDLL4716/TR](#) [1N4687/TR](#)
[CDLL4688/TR](#) [1N4714/TR](#) [CDLL4697/TR](#) [CDLL4680/TR](#) [1N4711/TR](#) [CDLL4687/TR](#) [CDLL4708/TR](#) [1N4707/TR](#)
[CDLL4692/TR](#) [1N4704/TR](#) [1N4690/TR](#) [CDLL4711/TR](#) [CDLL4690/TR](#) [1N4689/TR](#) [CDLL4705/TR](#) [CDLL4683/TR](#)
[CDLL4717/TR](#) [1N4688/TR](#) [CDLL4702/TR](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.