

Small Signal Product

## Bi-directional ESD Protection Diode

**FEATURES**

- Meet IEC61000-4-2 (ESD)  $\pm 15\text{kV}$  (air),  $\pm 8\text{kV}$  (contact)
- Meet IEC61000-4-4 (EFT) rating, 40A (5/50ns)
- Protects one Bi-directional I/O line
- Working Voltage : 5V
- Pb free version and RoHS compliant
- Packing code with suffix "G" means green compound (halogen-free)




**SOD-323**



**MECHANICAL DATA**

- Case: SOD-323 small outline plastic package
- Terminal: Matte tin plated, lead free., solderable per MIL-STD-202, Method 208 guaranteed
- High temperature soldering guaranteed :  $260^{\circ}\text{C}/10\text{s}$
- Weight:  $4.85 \pm 0.5 \text{ mg}$
- Marking code: 2B

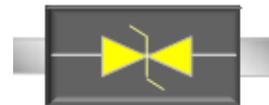

**APPLICATIONS**

- Cell Phone Handsets and Accessories
- Notebooks, Desktops, and Servers
- Keypads, Side Keys, USB 2.0, LCD Displays
- Portable Instrumentation
- Microprocessor Based Equipment

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)**

PARAMETER	SYMBOL	VALUE	UNIT
Peak Pulse Power (tp=8/20 $\mu\text{s}$ waveform)	$P_{PP}$	500	W
ESD per IEC 61000-4-2 (Air)	$V_{ESD}$	$\pm 15$	KV
ESD per IEC 61000-4-2 (Contact)		$\pm 8$	
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150	$^{\circ}\text{C}$

PARAMETER	SYMBOL	MIN	MAX	UNIT
Reverse Stand-Off Voltage	$V_{RWM}$	-	5	V
Reverse Breakdown Voltage	$V_{(BR)}$	6	-	V
Reverse Leakage Current	$I_R$	-	5	$\mu\text{A}$
Clamping Voltage	$V_C$	-	9.8	V
		-	14.5	
Junction Capacitance	$C_J$	200		pF

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

( $T_A=25^\circ\text{C}$  unless otherwise noted)

Fig. 1 Non-Repetitive Peak Pulse Power VS. Pulse Time

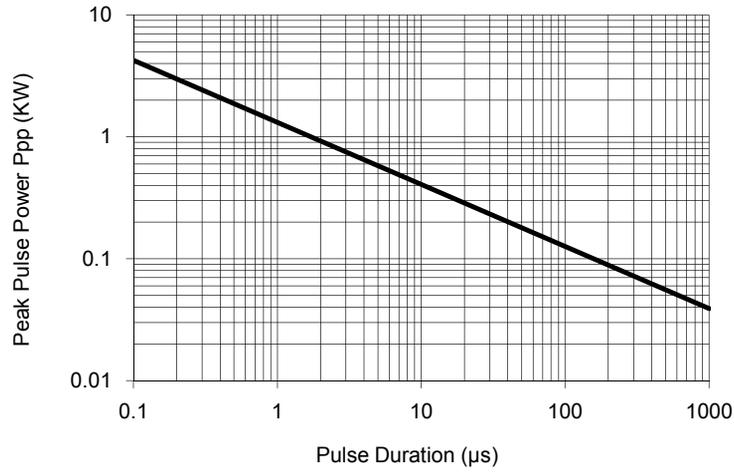


Fig. 2 Pulse Waveform

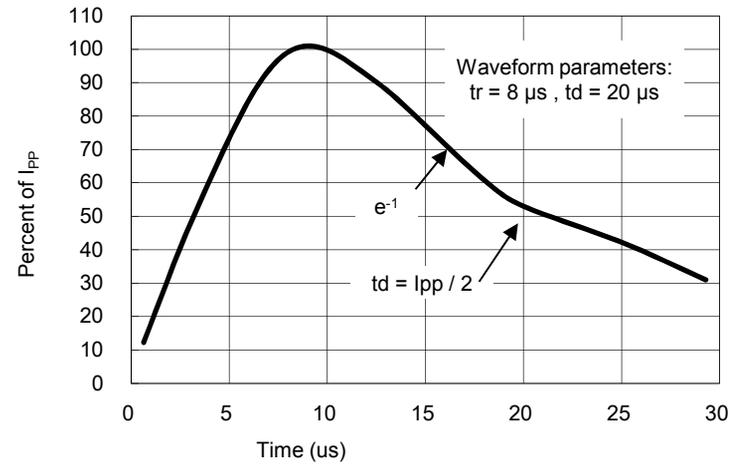


Fig. 3 Admissible Power Dissipation Curve

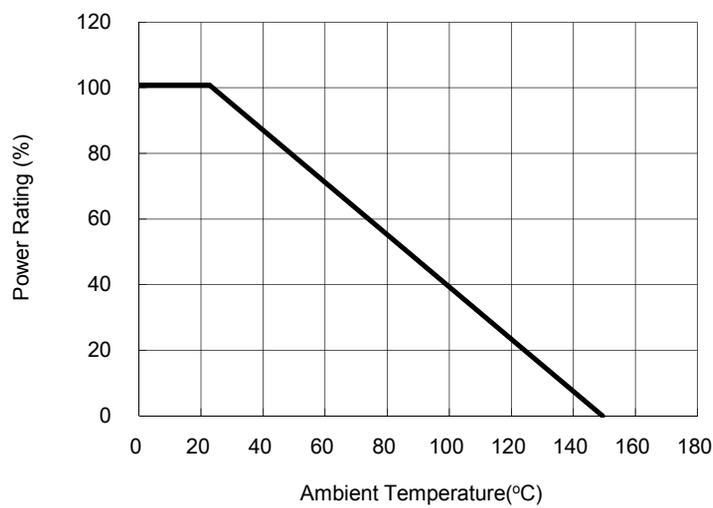


Fig. 4 Typical Junction Capacitance


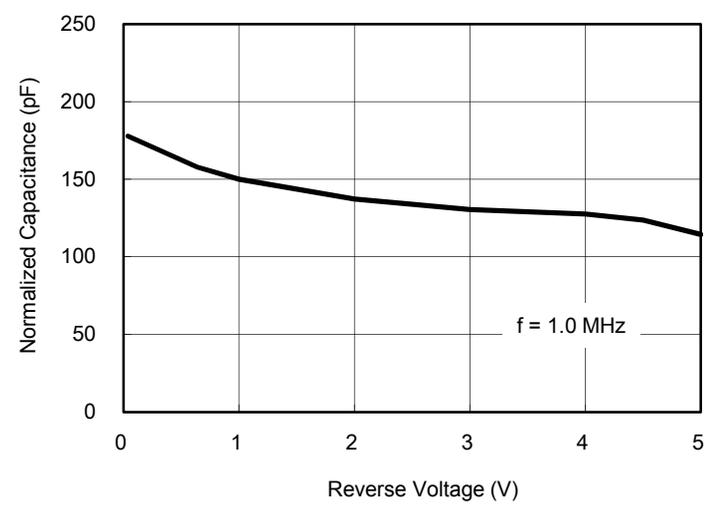



Fig. 5 Clamping Voltage VS. Peak Pulse Current

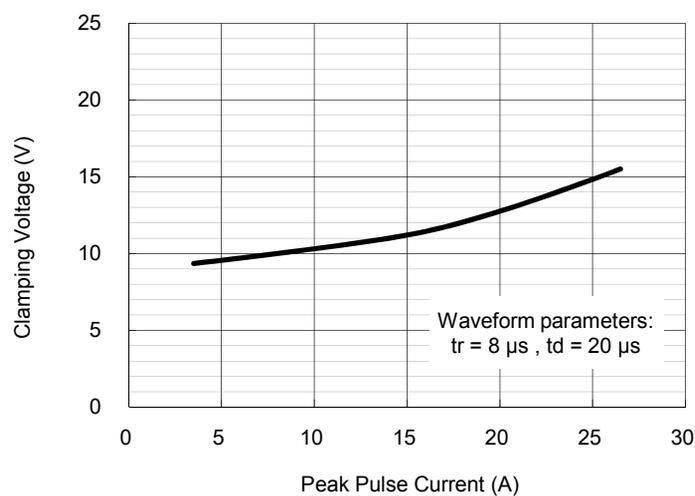

Small Signal Product

ORDER INFORMATION (EXAMPLE)


TESDC5V0 RRG



Green compound code  
Packing code  
Part no.


PACKAGE OUTLINE DIMENSIONS

**SOD-323**

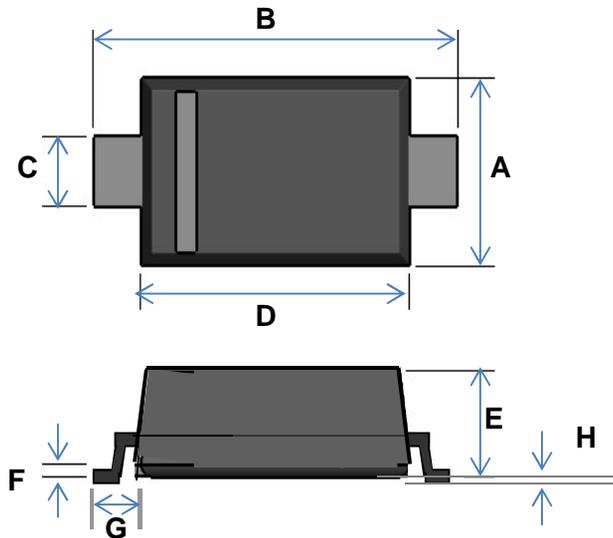

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.150	1.400	0.045	0.055
B	2.300	2.700	0.091	0.106
C	0.250	0.450	0.010	0.018
D	1.600	1.800	0.063	0.071
E	0.800	1.000	0.031	0.039
F	0.050	0.177	0.002	0.007
G	0.475 REF		0.019 REF	
H	-	0.100	-	0.004

SUGGEST PAD LAYOUT

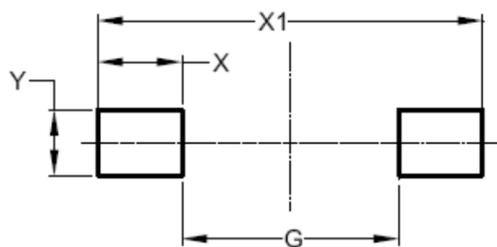

DIM.	Unit (mm)		Unit (inch)	
	Min	Min	Min	Min
G	1.52		0.060	
X	0.59		0.023	
X1	2.70		0.106	
Y	0.45		0.018	

Note: The suggested land pattern dimensions have been provided for reference only, as actual pad layouts may vary depending on application.

APPLICATION INFORMATION

- Designed to protect one data, I/O, or power supply line
- Designed to protect sensitive electronics from damage or latch-up due to ESD
- Designed to replace multilayer varistors (MLVs) in portable applications
- Offers superior electrical characteristics such as lower clamping voltage and no device degradation when compared to MLVs
- The combination of small size and high ESD surge capability makes them ideal for use in portable applications

CIRCUIT BOARD LAYOUT RECOMMENDATIONS

- Good circuit board layout is critical for the suppression of ESD induced transients
- Place the ESD Protection Diode near the input terminals or connectors to restrict transient coupling
- Minimize the path length between the ESD Protection Diode and the protected line
- Minimize all conductive loops including power and ground loops
- The ESD transient return path to ground should be kept as short as possible

### Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.